

STEAMER 1 (SE-90002-SU)



Product description


Rectangular - Medium




Luminaire Structure

- Die-cast aluminium housing and frame
- Pre-treated before powder coating ensuring high corrosion resistance
- Two cable entries for through wiring
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Clear toughened glass
- High-efficiency PMMA lens
- Integral control gear


Optic

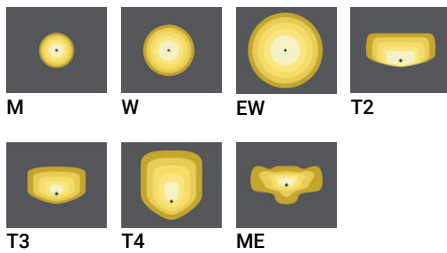

Product colour

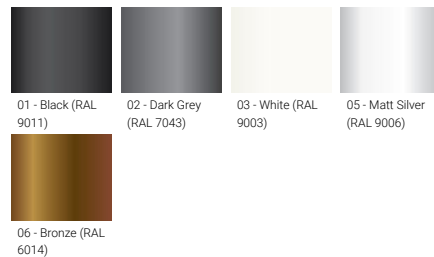

Special finishes upon request

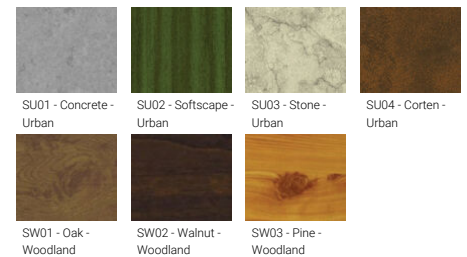


STEAMER 1 (SE-90002-SU)

Technical information

Material	Aluminium	Input voltage	220-240 V 50/60 Hz	Operating temperature	-20 °C to 50 °C
Light source	2 x 24 LED	Optic	M, W, EW, T2, T3, T4, ME	Through wiring	Two cable entries for through wiring
Power	105 W	Optic value	30°, 57°, 105°x115°, 136°x51°, 119°x86°, 102°x74°, 137°x58°		Clear toughened glass, High-efficiency PMMA lens
Lumen	12434 - 14374 lm	CCT / CRI	3000K CRI80, 4000K CRI80	Lens / Reflector / Optic	
Efficacy	118 - 137 lm/W	Dimming type	On/Off, 1-10V, DALI	MacAdam Ellipse	3 SDCM
Driver option	Integral control gear			Lifetime L90B10 (hours)	> 90,000
Driver	Constant current (CC)	Product colours	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland	Lifetime L80B10 (hours)	> 90,000
		Weight	10.1 kg	Lifetime L80B50 (hours)	> 90,000

SE-90002-SU

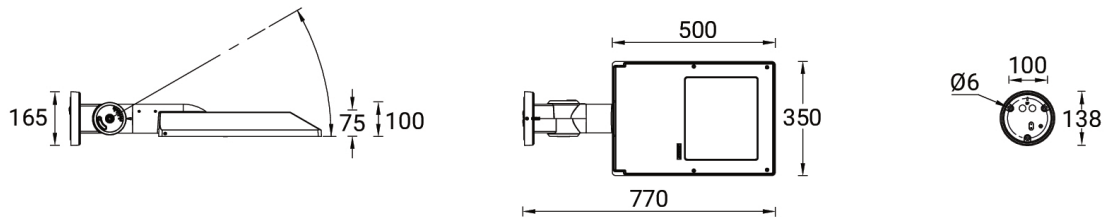

Accessories



DALI Control System
Control-DALI