

**STEAMER 2 (SE-90011)**



**Product description**

Rectangular - Large



**Luminaire Structure**

- Single cable entry
- One IP68 connector supplied with 0.5 m of 3x1.0 sqmm outdoor cable


- Clear toughened glass
- High-efficiency PMMA lens

- Integral control gear


**Optic**



**Product colour**

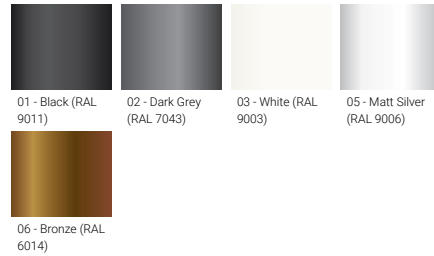

**Special finishes upon request**

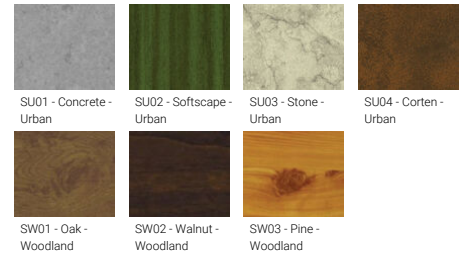


**STEAMER 2 (SE-90011)**

**Technical information**

<b>Material</b>	Aluminium
<b>Light source</b>	6 x 3 LED
<b>Power</b>	157 W
<b>Lumen</b>	11398 - 15997 lm
<b>Efficacy</b>	73 - 102 lm/W
<b>Driver option</b>	Integral control gear
<b>Driver</b>	Constant current (CC)
<b>Input voltage</b>	220-240 V 50/60 Hz

<b>Optic</b>	T2, T3, T4, T5, ME
<b>Optic value</b>	142°x42°, 141°x47°, 95°x84°, 88°x140°, 136°x39°
<b>CCT / CRI</b>	3000K CRI 80
<b>Dimming type</b>	On/Off, 1-10V, DALI
<b>Product colours</b>	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland
<b>Weight</b>	14.5 kg
<b>Operating temperature</b>	-20 °C to 50 °C
<b>Cable</b>	One IP68 connector supplied with 0.5 m of 3x1.0 sqmm outdoor cable

<b>Through wiring</b>	Single cable entry
<b>Lens / Reflector / Optic</b>	Clear toughened glass, High-efficiency PMMA lens
<b>MacAdam Ellipse</b>	3 SDCM
<b>Lifetime L90B10 (hours)</b>	> 109,000
<b>Lifetime L80B10 (hours)</b>	> 109,000
<b>Lifetime L80B50 (hours)</b>	> 109,000
<b>Variants (On/Off, 1-10V, DALI)</b>	Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)

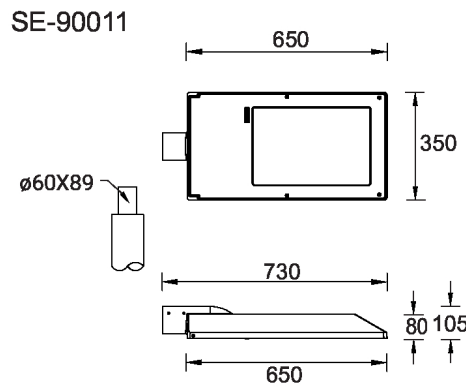

**Accessories**



Double adjustable 60°  
**A91760**



Double arm mount  
**A91160**



Double arm mount  
**A91360**



Double arm mount  
**A91560**

**STEAMER 2 (SE-90011)**

Motion sensor - PIR - 1-10V - Up  
to 3 m  
**A90191-L2**



Motion sensor - PIR - 1-10V - Up  
to 6 m  
**A90191-L3**



Motion sensor - PIR - 1-10V - Up  
to 12 m  
**A90191-L7**



Remote controller for the motion  
sensor - 1-10V (A90191)  
**A90791**



Single adjustable 60°  
**A91660**



Single arm mount  
**A91060**



Single arm mount  
**A91260**



Single arm mount  
**A91460**