

**STEAMER 2 (SE-90012-SU)**



**Product description**

Rectangular - Large




**Luminaire Structure**

- Die-cast aluminium housing and frame
- Pre-treated before powder coating ensuring high corrosion resistance
- Two cable entries for through wiring


- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Clear toughened glass

- High-efficiency PMMA lens
- Integral control gear


**Optic**

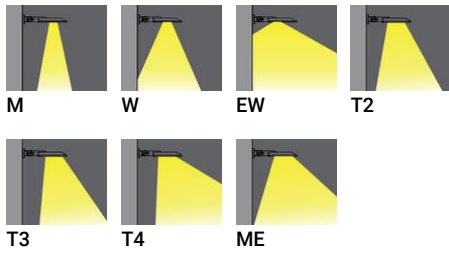

**Product colour**

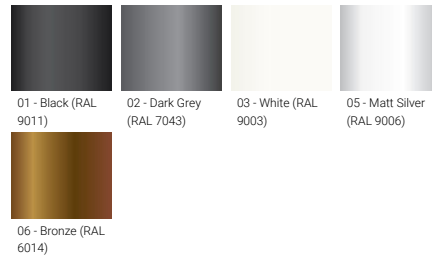

**Special finishes upon request**

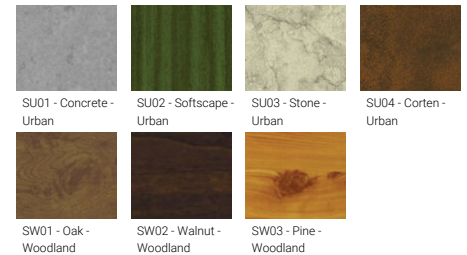


**STEAMER 2 (SE-90012-SU)**

**Technical information**

<b>Material</b>	Aluminium	<b>Input voltage</b>	220-240 V 50/60 Hz	<b>Operating temperature</b>	-20 °C to 50 °C
<b>Light source</b>	4 x 24 LED	<b>Optic</b>	M, W, EW, T2, T3, T4, ME	<b>Through wiring</b>	Two cable entries for through wiring
<b>Power</b>	209 W	<b>Optic value</b>	30°, 57°, 105°x115°, 136°x51°, 119°x86°, 102°x74°, 137°x58°		Clear toughened glass, High-efficiency PMMA lens
<b>Lumen</b>	24479 - 28297 lm	<b>CCT / CRI</b>	3000K CRI80, 4000K CRI80	<b>Lens / Reflector / Optic</b>	
<b>Efficacy</b>	117 - 135 lm/W	<b>Dimming type</b>	On/Off, 1-10V, DALI	<b>MacAdam Ellipse</b>	3 SDCM
<b>Driver option</b>	Integral control gear			<b>Lifetime L90B10 (hours)</b>	> 90,000
<b>Driver</b>	Constant current (CC)	<b>Product colours</b>	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland	<b>Lifetime L80B10 (hours)</b>	> 90,000
		<b>Weight</b>	10.1 kg	<b>Lifetime L80B50 (hours)</b>	> 90,000

**SE-90012-SU**

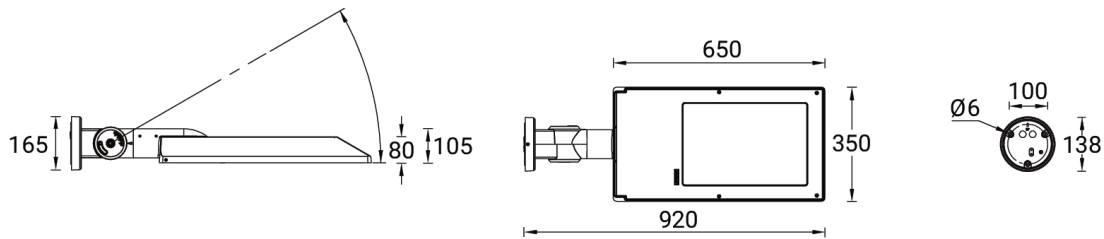

**Accessories**



DALI Control System  
Control-DALI