

SYNDY 2 (SY-20914)



Product description

Oval - Supplied with a cylindrical, straight aluminium pole
 pole - Height options: 4 - 6 m



Luminaire Structure


- Die-cast aluminium housing
- Pre-treated before powder coating ensuring high corrosion resistance
- Extruded aluminium column
- Single cable entry
- One IP68 connector supplied with 0.2 m of 3x1.0 sqmm outdoor cable
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Clear toughened glass
- White coated aluminium reflector on the top of luminaire
- Integral control gear
- Maximum wind load resistance is 120 km/h

Optic




G

Product colour

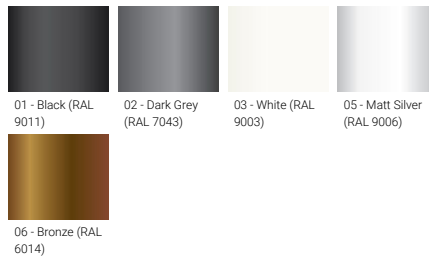

Special finishes upon request

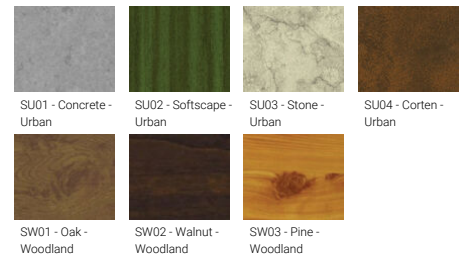

SYNDY 2 (SY-20914)


Technical information

Material	Aluminium
Light source	1 COB
Power	49 W
Lumen	2329 - 2922 lm
Efficacy	48 - 60 lm/W
Driver option	Integral control gear
Driver	Constant current (CC)
Input voltage	220-240 V 50/60 Hz




Optic	G
Optic value	122°x 120°
CCT / CRI	3000K CRI80, 4000K CRI80
Dimming type	On/Off, 1-10V, DALI
Product colours	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland
Weight	34.6 kg
Operating temperature	-20 °C to 40 °C
Cable	One IP68 connector supplied with 0.2 m of 3x1.0 sqmm outdoor cable

Through wiring	Single cable entry
Lens / Reflector / Optic	Clear toughened glass, White coated aluminium reflector on the top of luminaire
MacAdam Ellipse	3 SDCM
Lifetime L90B10 (hours)	> 50,700
Lifetime L80B10 (hours)	> 63,500
Lifetime L80B50 (hours)	> 63,500
Variants (1-10V, DALI)	Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)

SY-20914

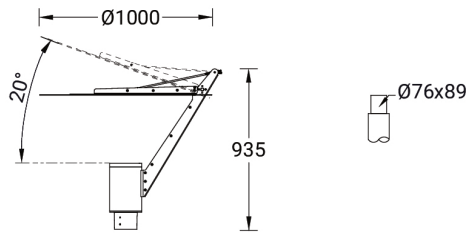

Accessories



SYNDY 2 (SY-20914)

5 m - Cylindrical, straight
aluminium pole for SYNDY
APD150140-SYNDY



6 m - Cylindrical, straight
aluminium pole for SYNDY
APD160140-SYNDY
