

TANGO 36 (TA-20001)



Product description

1 side - Round




Luminaire Structure

- Die-cast aluminium housing and frame
- Pre-treated before powder coating ensuring high corrosion resistance
- Single cable entry
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)

- Durable silicone rubber gasket
- Clear toughened glass
- High-efficiency PMMA lens
- Integral control gear

- Maximum wind load resistance is 140 km/h


Optic

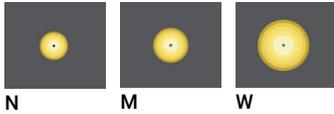

Product colour



Special finishes upon request

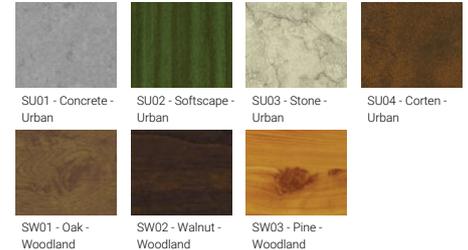


TANGO 36 (TA-20001)

Technical information

Material	Aluminium	Optic value	12°, 26°, 40°	Operating temperature	-20 °C to 40 °C
Light source	24 LED	CCT / CRI	3000K CRI80, 4000K CRI80	Through wiring	Single cable entry
Power	38 W	Bug	B3-U0-G0	Lens / Reflector / Optic	Clear toughened glass, High-efficiency PMMA lens
Lumen	3634 - 4265 lm	ULR	0%	MacAdam Ellipse	3 SDCM
Efficacy	96 - 112 lm/W	ULOR	0%	Lifetime L90B10 (hours)	> 120,000
Driver option	Integral control gear	CIE flux code n°3	100	Lifetime L80B10 (hours)	> 120,000
Driver	Constant current (CC)	Dimming type	On/Off, 1-10V, DALI	Lifetime L80B50 (hours)	> 120,000
Input voltage	220-240 V 50/60 Hz	Product colours	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland	Variants (1-10V, DALI)	
Optic	N, M, W			Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)	
		Weight	5.3 kg		

TA-20001

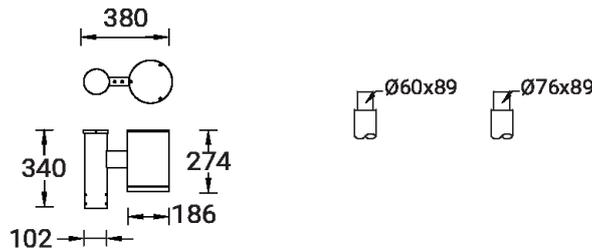

Accessories



DALI Control System
Control-DALI