

**TANGO 36 (TA-20011)**



**Product description**

1 side - Round



**Luminaire Structure**

- Die-cast aluminium housing and frame
- Pre-treated before powder coating ensuring high corrosion resistance
- Single cable entry
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)

- Durable silicone rubber gasket
- Clear toughened glass
- High-efficiency PMMA lens
- Integral control gear

- Maximum wind load resistance is 140 km/h

**Optic**



**T2**      **T3**      **T4**

**Product colour**




01 - Black (RAL 9011)    02 - Dark Grey (RAL 7043)    03 - White (RAL 9003)    05 - Matt Silver (RAL 9006)




06 - Bronze (RAL 6014)


**Special finishes upon request**




SU01 - Concrete - Urban    SU02 - Softscape - Urban    SU03 - Stone - Urban    SU04 - Corten - Urban



SW01 - Oak - Woodland



SW02 - Walnut - Woodland




SW03 - Pine - Woodland

**TANGO 36 (TA-20011)**

**Technical information**

<b>Material</b>	Aluminium	<b>Optic value</b>	134°x50°, 125°x64°, 98°x72°	<b>Operating temperature</b>	-20 °C to 40 °C
<b>Light source</b>	16 LED	<b>CCT / CRI</b>	3000K CRI80, 4000K CRI80	<b>Through wiring</b>	Single cable entry
<b>Power</b>	35 W	<b>Bug</b>	B1-U0-G1	<b>Lens / Reflector / Optic</b>	Clear toughened glass, High-efficiency PMMA lens
<b>Lumen</b>	3476 - 3910 lm	<b>ULR</b>	0%	<b>MacAdam Ellipse</b>	3 SDCM
<b>Efficacy</b>	99 - 112 lm/W	<b>ULOR</b>	0%	<b>Lifetime L90B10 (hours)</b>	> 90,000
<b>Driver option</b>	Integral control gear	<b>CIE flux code n°3</b>	98	<b>Lifetime L80B10 (hours)</b>	> 90,000
<b>Driver</b>	Constant current (CC)	<b>Dimming type</b>	On/Off, 1-10V, DALI	<b>Lifetime L80B50 (hours)</b>	> 90,000
<b>Input voltage</b>	220-240 V 50/60 Hz	<b>Product colours</b>	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland	<b>Variants (1-10V, DALI)</b>	Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)
<b>Optic</b>	T2, T3, T4				

**TA-20011**

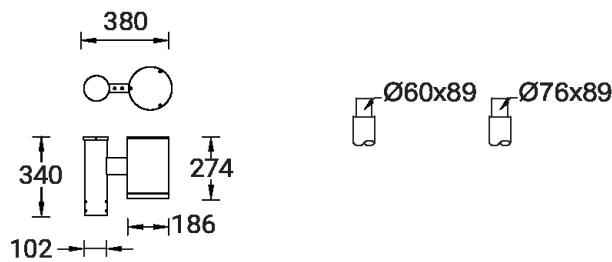

**Accessories**

