

TANGO 37 (TA-20031)



Product description

2 sides - Round



Luminaire Structure

- Die-cast aluminium housing and frame
- Pre-treated before powder coating ensuring high corrosion resistance
- Single cable entry
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)

- Durable silicone rubber gasket
- Clear toughened glass
- High-efficiency PMMA lens
- Integral control gear

- Maximum wind load resistance is 140 km/h

Optic



T2 **T3** **T4**

Product colour




01 - Black (RAL 9011) 02 - Dark Grey (RAL 7043) 03 - White (RAL 9003) 05 - Matt Silver (RAL 9006)



06 - Bronze (RAL 6014)

Special finishes upon request




SU01 - Concrete - Urban SU02 - Softscape - Urban SU03 - Stone - Urban SU04 - Corten - Urban



SW01 - Oak - Woodland



SW02 - Walnut - Woodland




SW03 - Pine - Woodland

TANGO 37 (TA-20031)

Technical information

| | | | | | |
|----------------------|-----------------------|--------------------------|--|---------------------------------|---|
| Material | Aluminium | Optic value | 140°x46°, 140°x68°, 91°x76° | Operating temperature | -20 °C to 40 °C |
| Light source | 2 x 16 LED | CCT / CRI | 3000K CRI80, 4000K CRI80 | Through wiring | Single cable entry |
| Power | 70 W | Bug | B1-U0-G1 | Lens / Reflector / Optic | Clear toughened glass, High-efficiency PMMA lens |
| Lumen | 6952 - 7820 lm | ULR | 0% | MacAdam Ellipse | 3 SDCM |
| Efficacy | 99 - 112 lm/W | ULOR | 0% | Lifetime L90B10 (hours) | > 90,000 |
| Driver option | Integral control gear | CIE flux code n°3 | 98 | Lifetime L80B10 (hours) | > 90,000 |
| Driver | Constant current (CC) | Dimming type | On/Off, 1-10V, DALI | Lifetime L80B50 (hours) | > 90,000 |
| Input voltage | 220-240 V 50/60 Hz | Product colours | Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland | Variants (1-10V, DALI) | Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0) |
| Optic | T2, T3, T4 | | | | |

TA-20031

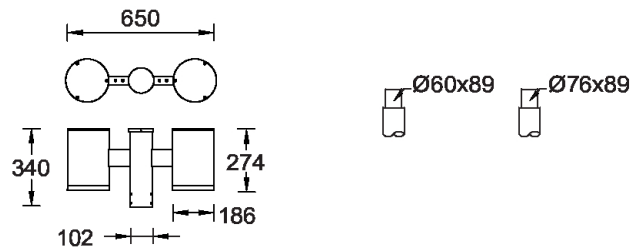

Accessories

