

TAURAS 3 (TU-20396-2)



Product description

Ø160 mm - Supplied with specific 2.5 m cylindrical, straight aluminium pole: APD125160-TU-20396-2




Luminaire Structure

- Die-cast aluminium housing
- Extruded aluminium column
- Pre-treated before powder coating ensuring high corrosion resistance
- Single cable entry
- One IP68 connector supplied with 0.3 m of 3x1.0 sqmm outdoor cable

- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Mat finishing aluminium reflector
- Clear UV-stabilised polycarbonate diffuser
- Integral control gear


- Maximum wind load resistance is 160 km/h
- Surge protection 10kV

Optic




G

Product colour

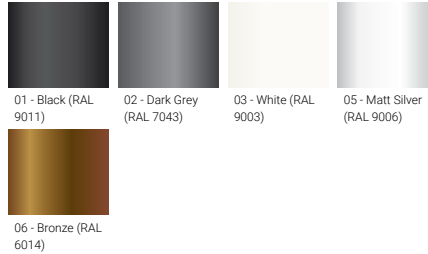


Special finishes upon request

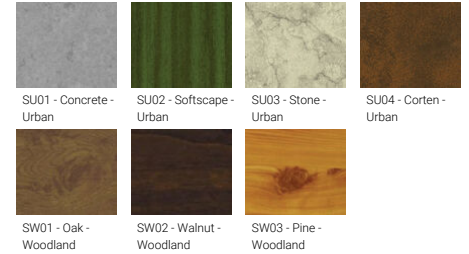





TAURAS 3 (TU-20396-2)

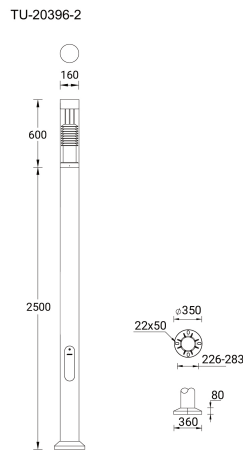Technical information

Material	Aluminium	Input voltage	220-240 V 50/60 Hz	Operating temperature	-20 °C to 40 °C
Light source	1 COB	Optic	G	Cable	One IP68 connector supplied with 0.3 m of 3x1.0 sqmm outdoor cable
Power	41 W	Optic value	172°	Through wiring	Single cable entry
Lumen	1082 - 1096 lm	CCT / CRI	3000K CRI80, 4000K CRI80	Lens / Reflector / Optic	Mat finishing aluminium reflector, Clear UV-stabilised polycarbonate diffuser
Efficacy	26 - 27 lm/W	Dimming type	On/Off, 1-10V, DALI	MacAdam Ellipse	3 SDCM
Driver option	Integral control gear	Product colours	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland	Lifetime L90B10 (hours)	> 55,000
Driver	Constant current (CC)			Variants (1-10V, DALI)	Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)



Accessories

			
Root mount kit A20691	Circuit breaker box IP44 A21291	2.5 m - Cylindrical, straight aluminium pole for TAURAS APD125160-TU-20396-2	DALI Control System Control-DALI