

UTAH ECO 1 (UT-50573) (Version 2)



Product description

Integral control gear - With spike / anti-glare visor - Class I



Luminaire Structure

- Single cable entry
 - One cable gland supplied with 0.7 m of 3x1.0 sqmm outdoor cable

- Clear toughened glass
 - High-efficiency PMMA lens


- Integral control gear

Optic




M

Product colour

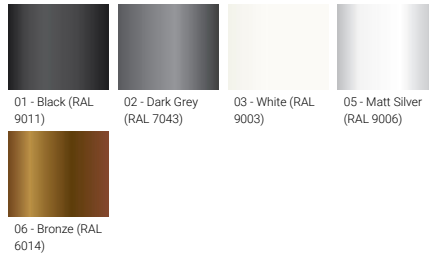

Special finishes upon request

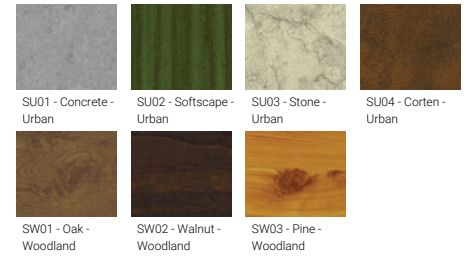

UTAH ECO 1 (UT-50573) (Version 2)

Technical information

Material	Aluminium
Light source	1 LED
Power	11 W
Lumen	552 - 580 lm
Efficacy	50 - 53 lm/W
Driver option	Integral control gear
Driver	Constant current (CC)
Input voltage	220-240 V 50/60 Hz
Optic	M

Optic value	23°
CCT / CRI	3000K CRI80, 4000K CRI80
Bug	B1-U0-G0
ULR	0%
ULOR	0%
CIE flux code n°3	100
Dimming type	On/Off
Product colours	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland
Weight	0.5 kg

Operating temperature	25 °C
Cable	One cable gland supplied with 0.7 m of 3x1.0 sqmm outdoor cable
Through wiring	Single cable entry
Lens / Reflector / Optic	Clear toughened glass, High-efficiency PMMA lens
MacAdam Ellipse	3 SDCM
Lifetime L90B10 (hours)	> 109,000
Lifetime L80B10 (hours)	> 109,000
Lifetime L80B50 (hours)	> 109,000

UT-50573

