

VANCOUVER 1 (VA-20001-LC)



Product description

4500 mm - No decorative pattern - LIGHTCONNECT™



Luminaire Structure

- Die-cast aluminium housing
- Extruded aluminium column
- Pre-treated before powder coating ensuring high corrosion resistance
- Single cable entry
- One IP68 connector supplied with 0.3 m of 3x1.0 sqmm outdoor cable

- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- High-efficiency optical reflector
- Clear toughened glass
- Integral control gear


- Maximum wind load resistance is 160 km/h
- Surge protection 10kV
- VANCOUVER luminaires with projectors on top and colder than 3000K CCT do not meet the IDA certification requirements

Optic




G

Product colour

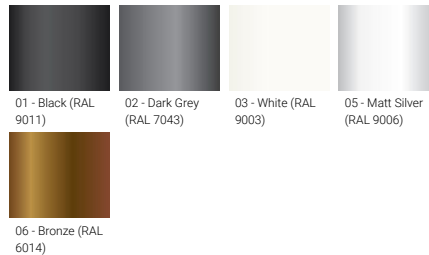

Special finishes upon request

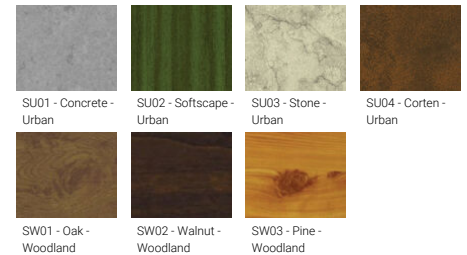


VANCOUVER 1 (VA-20001-LC)

Technical information

| | | | | | |
|----------------------|-----------------------|--------------------------|--|---------------------------------|---|
| Material | Aluminium | Optic value | 65° | Operating temperature | -20 °C to 40 °C |
| Light source | 1 COB | CCT / CRI | 3000K CRI80, 4000K CRI80 | Cable | One IP68 connector supplied with 0.3 m of 3x1.0 sqmm outdoor cable |
| Power | 40 W | Bug | B2-U0-G0 | Through wiring | Single cable entry |
| Lumen | 2775 - 2969 lm | ULR | 0% | Lens / Reflector / Optic | High-efficiency optical reflector, Clear toughened glass |
| Efficacy | 69 - 74 lm/W | ULOR | 0% | MacAdam Ellipse | 3 SDCM |
| Driver option | Integral control gear | CIE flux code n°3 | 99 | Lifetime L90B10 (hours) | > 50,700 |
| Driver | Constant current (CC) | Dimming type | DALI | Lifetime L80B10 (hours) | > 63,500 |
| Input voltage | 220-240 V 50/60 Hz | Product colours | Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland | Lifetime L80B50 (hours) | > 63,500 |
| Optic | G | | | Variants (DALI) | Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0) |

VANCOUVER 1
VA-20001

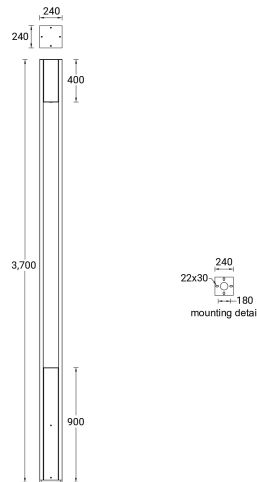

Accessories



Zhaga Book 18 socket (Up)
A90991-U



NEMA 7 socket
A90891



DALI Control System
Control-DALI



Smart Pole Accessories
Accs-Smart-Pole