

VANCOUVER 51 (VA-20233-LC)



Product description

240x240 mm - 4810 mm - Decorative pattern type 3
(Optic) - 3 projectors (Optic 2nd) - LIGHTCONNECT™



**LIGHT
CONNECT™**

Luminaire Structure

- Die-cast aluminium housing
- Extruded aluminium column
- Pre-treated before powder coating ensuring high corrosion resistance
- Single cable entry
- One IP68 connector supplied with 0.3 m of 3x1.0 sqmm outdoor cable

- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- High-efficiency optical reflector
- Clear toughened glass
- Integral control gear


- Maximum wind load resistance is 160 km/h
- Surge protection 10kV
- VANCOUVER luminaires with projectors on top and colder than 3000K CCT do not meet the IDA certification requirements

Optic



G / M G / W G / VW


Product colour

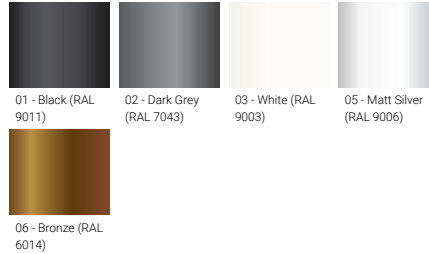

01 - Black (RAL 9011) 02 - Dark Grey (RAL 7043) 03 - White (RAL 9003) 05 - Matt Silver (RAL 9006)

06 - Bronze (RAL 6014)

Special finishes upon request

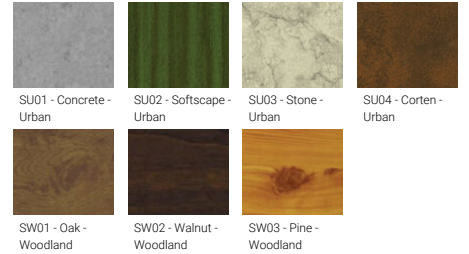

SU01 - Concrete - Urban SU02 - Softscape - Urban SU03 - Stone - Urban SU04 - Corten - Urban

SW01 - Oak - Woodland SW02 - Walnut - Woodland SW03 - Pine - Woodland

VANCOUVER 51 (VA-20233-LC)

Technical information

Material	Aluminium	Optic value	134°	Through wiring	Single cable entry	
Light source	1 COB & 3 x 1 COB (Projectors)	Optic (2nd)	M, W, VW	Lens / Reflector / Optic	High-efficiency optical reflector, Clear toughened glass	
Power	103 W	Optic (2nd) value	23°, 32°, 43°	MacAdam Ellipse	3 SDCM	
Lumen	7545 - 7845 lm	CCT / CRI	3000K CRI80, 4000K CRI80	Lifetime L90B10 (hours)	> 109,000	
Efficacy	73 - 76 lm/W	Dimming type	On/Off, 1-10V, DALI	Lifetime L80B10 (hours)	> 109,000	
Driver option	Integral control gear	Product colours	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland	Lifetime L80B50 (hours)	> 109,000	
Driver	Constant current (CC)			Variants (On/Off, 1-10V, DALI)	Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)	
Input voltage	220-240 V 50/60 Hz					
Optic	G	Weight	54.3 kg			
		Operating temperature	-20 °C to 40 °C			
		Cable	One IP68 connector supplied with 0.3 m of 3x1.0 sqmm outdoor cable			

Accessories



Zhaga Book 18 socket (Up)
A90991-U



NEMA 7 socket
A90891



DALI Control System
Control-DALI



Smart Pole Accessories
Accs-Smart-Pole