

**VANCOUVER 53** (VA-20242)



**Product description**

240x240 mm - 3700 mm - Decorative pattern type 2 - IP65



**Luminaire Structure**

- Die-cast aluminium housing
- Extruded aluminium column
- Pre-treated before powder coating ensuring high corrosion resistance
- Single cable entry
- One IP68 connector supplied with 0.3 m of 3x1.0 sqmm outdoor cable

- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- High-efficiency optical reflector
- Clear toughened glass
- Integral control gear


- Maximum wind load resistance is 160 km/h
- Surge protection 10kV
- VANCOUVER luminaires with projectors on top and colder than 3000K CCT do not meet the IDA certification requirements

**Optic**




G

**Product colour**

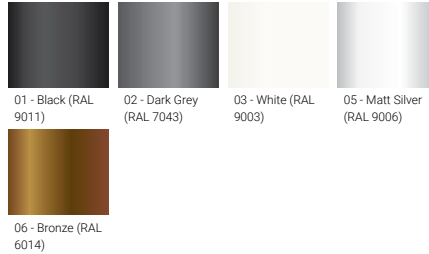


**Special finishes upon request**

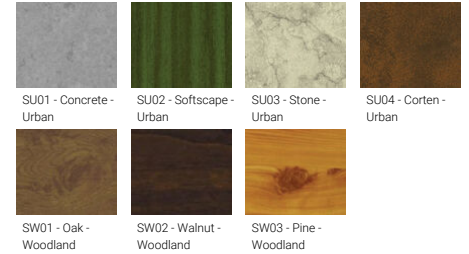

**VANCOUVER 53 (VA-20242)**

**Technical information**

<b>Material</b>	Aluminium	<b>Optic</b>	G	<b>Through wiring</b>	Single cable entry
<b>Light source</b>	1 COB	<b>Optic value</b>	134°	<b>Lens / Reflector / Optic</b>	High-efficiency optical reflector, Clear toughened glass
<b>Power</b>	40 W	<b>CCT / CRI</b>	3000K CRI80, 4000K CRI80	<b>MacAdam Ellipse</b>	3 SDCM
<b>Lumen</b>	2586 - 2781 lm	<b>Dimming type</b>	On/Off, 1-10V, DALI	<b>Lifetime L90B10 (hours)</b>	> 50,700
<b>Efficacy</b>	65 - 70 lm/W	<b>Product colours</b>	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland	<b>Lifetime L80B10 (hours)</b>	> 63,500
<b>Driver option</b>	Integral control gear			<b>Lifetime L80B50 (hours)</b>	> 63,500
<b>Driver</b>	Constant current (CC)			<b>Variants (1-10V, DALI)</b>	Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)
<b>Input voltage</b>	220-240 V 50/60 Hz	<b>Cable</b>	One IP68 connector supplied with 0.3 m of 3x1.0 sqmm outdoor cable		

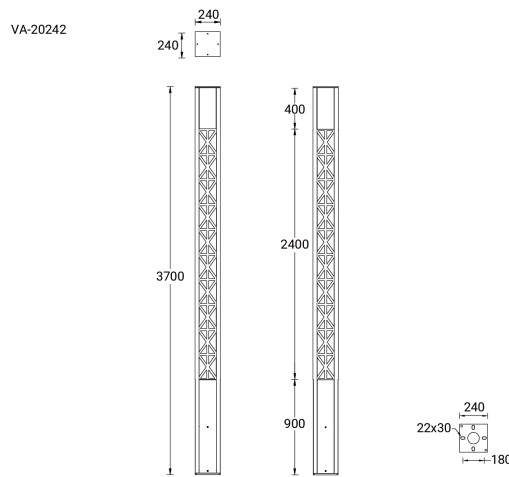

**Accessories**

