

**VANCOUVER 24 (VA-30001)**



**Product description**

160x160 mm - 400 mm - No decorative pattern



**Luminaire Structure**


- Die-cast aluminium housing
- Extruded aluminium column
- Pre-treated before powder coating ensuring high corrosion resistance
- Single cable entry
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Clear toughened glass
- High-efficiency optical reflector
- Integral control gear

**Optic**




G

**Product colour**

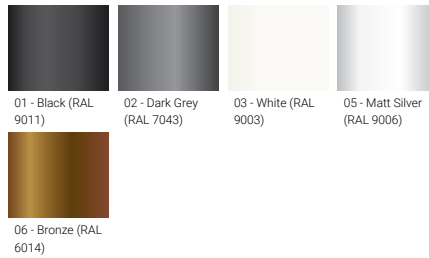

**Special finishes upon request**

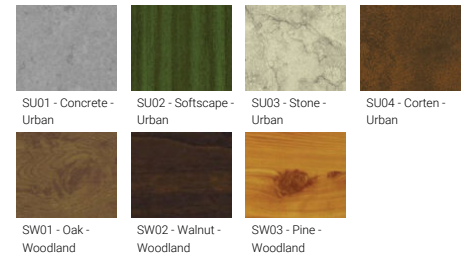

**VANCOUVER 24 (VA-30001)**

**Technical information**

|                      |                       |                          |                          |                                 |  |
|----------------------|-----------------------|--------------------------|--------------------------|---------------------------------|--|
| <b>Material</b>      | Aluminium             | <b>Optic</b>             | G                        | <b>Product colours</b>          | Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland |
| <b>Light source</b>  | 1 COB                 | <b>Optic value</b>       | 107°                     | <b>Weight</b>                   | 6.2 kg   |
| <b>Power</b>         | 8 W                   | <b>CCT / CRI</b>         | 3000K CRI80, 4000K CRI80 | <b>Operating temperature</b>    | -20 °C to 40 °C  |
| <b>Lumen</b>         | 327 - 331 lm          | <b>Bug</b>               | B0-U0-G0                 | <b>Through wiring</b>           | Single cable entry   |
| <b>Efficacy</b>      | 41 lm/W               | <b>ULR</b>               | 0%                       | <b>Lens / Reflector / Optic</b> | Clear toughened glass, High-efficiency optical reflector   |
| <b>Driver option</b> | Integral control gear | <b>ULOR</b>              | 0%                       | <b>MacAdam Ellipse</b>          | 3 SDCM   |
| <b>Driver</b>        | Constant current (CC) | <b>CIE flux code n°3</b> | 99                       | <b>Lifetime L90B10 (hours)</b>  | > 61,000   |
| <b>Input voltage</b> | 220-240 V 50/60 Hz    | <b>Dimming type</b>      | On/Off                   | <b>Variants (On/Off)</b>        | Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)  |

VA-30001

