

VEKTER 5 (VK-90001)



Product description

1 side



Luminaire Structure

- Die-cast aluminium housing
- Pre-treated before powder coating ensuring high corrosion resistance
- Single cable entry
- One cable gland supplied with 0.5 m of 3x1.0 sqmm outdoor cable

- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Clear toughened glass
- High-efficiency PMMA lens

- Integral control gear
- Maximum wind load resistance is 140 km/h
- Surge protection 10kV

Optic



M W EW T2



T3 T4

Product colour




01 - Black (RAL 9011) 02 - Dark Grey (RAL 7043) 03 - White (RAL 9003) 05 - Matt Silver (RAL 9006)




06 - Bronze (RAL 6014)

Special finishes upon request



SU01 - Concrete - Urban SU02 - Softscape - Urban SU03 - Stone - Urban SU04 - Corten - Urban




SW01 - Oak - Woodland SW02 - Walnut - Woodland SW03 - Pine - Woodland

VEKTER 5 (VK-90001)

Technical information

Material	Aluminium	Optic value	32°, 52°, 117°, 140°x52°, 140°x72°, 97°x82°	Cable	One cable gland supplied with 0.5 m of 3x1.0 sqmm outdoor cable
Light source	24 LED	CCT / CRI	3000K CRI80, 4000K CRI80	Through wiring	Single cable entry
Power	37 W	Bug	B1-U0-G1, B2-U0-G0, B3-U0-G0	Lens / Reflector / Optic	Clear toughened glass, High-efficiency PMMA lens
Lumen	4509 - 5143 lm	ULOR	0%	MacAdam Ellipse	3 SDCM
Efficacy	122 - 139 lm/W	CIE flux code n°3	97%, 98%, 99%	Lifetime L90B10 (hours)	> 90,000
Driver option	Integral control gear	Dimming type	On/Off, 1-10V, DALI	Lifetime L80B10 (hours)	> 90,000
Driver	Constant current (CC)	Product colours	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland	Lifetime L80B50 (hours)	> 90,000
Input voltage	220-240 V 50/60 Hz			Variants (1-10V, DALI)	Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)
Optic	M, W, EW, T2, T3, T4	Weight	7.6 kg		
			Operating temperature	-20 °C to 40 °C	

VK-90001

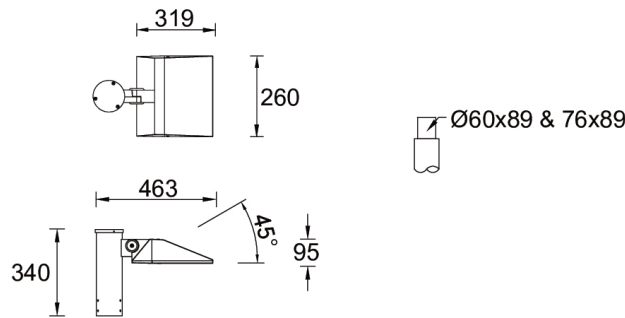

Accessories



DALI Control System
Control-DALI