

VERANDA 5 (VR-70302)



Product description

Small




Luminaire Structure

- Die-cast aluminium housing
- Pre-treated before powder coating ensuring high corrosion resistance
- Single cable entry

- One IP68 connector supplied with 0.2 m of 3x1.0 sqmm outdoor cable
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket


- High-efficiency polycarbonate lens
- Integral control gear

Optic




G

Product colour

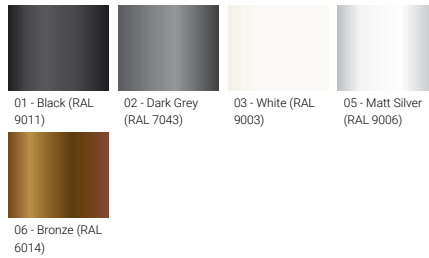

Special finishes upon request

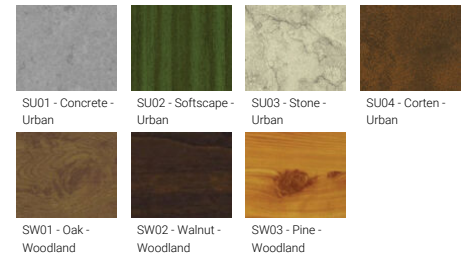


VERANDA 5 (VR-70302)


Technical information

Material	Aluminium	Optic	G	Product colours	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland
Light source	1 COB	Optic value	180°	Weight	1.7 kg
Power	16 W	CCT / CRI	3000K CRI80, 4000K CRI80	Operating temperature	-20 °C to 40 °C
Lumen	717 - 771 lm	Bug	B0-U3-G1	Cable	One IP68 connector supplied with 0.2 m of 3x1.0 sqmm outdoor cable
Efficacy	45 - 48 lm/W	ULR	22%	Through wiring	Single cable entry
Driver option	Integral control gear	ULOR	22%	Lens / Reflector / Optic	High-efficiency polycarbonate lens
Driver	Constant current (CC)	CIE flux code n°3	80	MacAdam Ellipse	3 SDCM
Input voltage	220-240 V 50/60 Hz	Dimming type	On/Off, 1-10V, DALI	Lifetime L90B10 (hours)	> 61,000

VR-70302

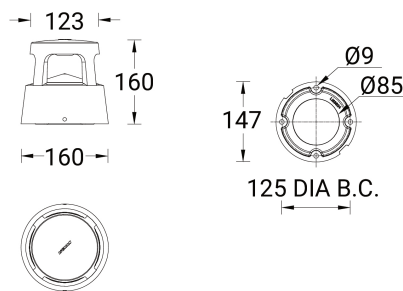

Accessories



Anchor bolt
A70291



DALI Control System
Control-DALI