

**VERANDA 6 (VR-70313)****Product description**


Medium

**Luminaire Structure**

- Die-cast aluminium housing
- Pre-treated before powder coating ensuring high corrosion resistance
- Single cable entry

- One IP68 connector supplied with 0.2 m of 3x1.0 sqmm outdoor cable
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket

- High-efficiency polycarbonate lens
- Integral control gear

**Optic**

G

**Product colour**

01 - Black (RAL 9011)



02 - Dark Grey (RAL 7043)



03 - White (RAL 9003)



05 - Matt Silver (RAL 9006)




06 - Bronze (RAL 6014)

**Special finishes upon request**

SU01 - Concrete - Urban




SU02 - Softscape - Urban



SU03 - Stone - Urban




SU04 - Corten - Urban



SW01 - Oak - Woodland



SW02 - Walnut - Woodland




SW03 - Pine - Woodland

**VERANDA 6 (VR-70313)**

**Technical information**

<b>Material</b>	Aluminium	<b>Optic</b>	G	<b>Through wiring</b>	Single cable entry
<b>Light source</b>	1 COB	<b>Optic value</b>	90° / 90°	<b>Lens / Reflector / Optic</b>	High-efficiency polycarbonate lens
<b>Power</b>	30 W	<b>CCT / CRI</b>	3000K CRI80, 4000K CRI80	<b>MacAdam Ellipse</b>	3 SDCM
<b>Lumen</b>	755 - 804 lm	<b>Dimming type</b>	On/Off, 1-10V, DALI	<b>Lifetime L90B10 (hours)</b>	> 50,700
<b>Efficacy</b>	25 - 27 lm/W	<b>Product colours</b>	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland	<b>Lifetime L80B10 (hours)</b>	> 63,500
<b>Driver option</b>	Integral control gear			<b>Lifetime L80B50 (hours)</b>	> 63,500
<b>Driver</b>	Constant current (CC)	<b>Weight</b>	4 kg		
<b>Input voltage</b>	220-240 V 50/60 Hz	<b>Operating temperature</b>	-20 °C to 40 °C		
		<b>Cable</b>	One IP68 connector supplied with 0.2 m of 3x1.0 sqmm outdoor cable		

VR-70313

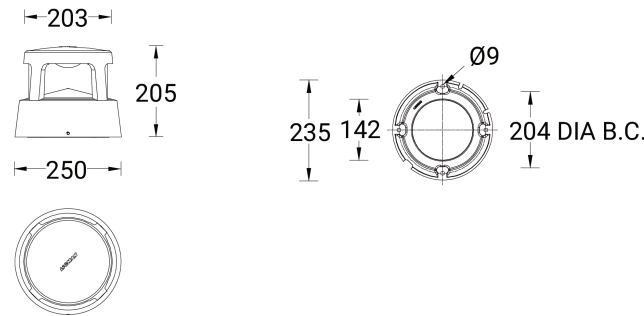

**Accessories**

