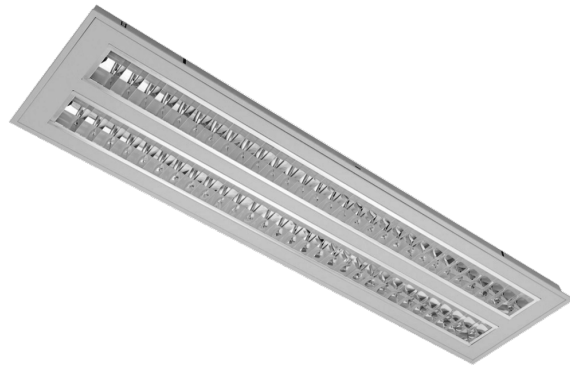


YORK 2 (YOK-80011)**Product description**

300x1200 mm - Double parabolic louvre of highly polished aluminum with opal cover

**Luminaire Structure**

- Formed sheet steel body with powder coating
- White painted metal sheet

- Stainless steel fasteners in grade 316
- Micro prismatic, opal, perforated cover and double parabolic louvre options

- Remote driver is included
- Two sizes: 600x600 mm & 300x1200 mm

Product colour

03 - White (RAL 9003) 10 - White (RAL 9016)

YORK 2 (YOK-80011)


Technical information

Material	Aluminium
Light source	2 x 54 LED
Power	27 W
Lumen	3300 lm
Efficacy	122 lm/W
Driver option	Integral control gear
Driver	Constant current (CC)

Input voltage	220-240 V 50/60 Hz
Optic	G
Optic value	56°x79°
CCT / CRI	4000K CRI80
Bug	B2-U1-G0
ULR	0%
ULOR	0%

CIE flux code n°3	100
Dimming type	On/Off, DALI
Product colours	White
Weight	4.4 kg
Operating temperature	-20 °C to 40 °C
Variants (On/Off)	Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)

YOK-80011

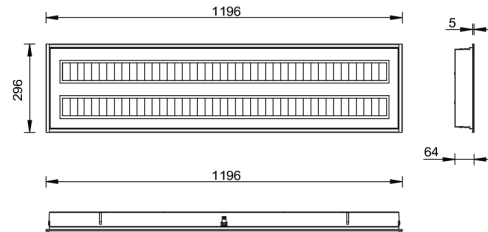

Accessories



DALI Control System
Control-DALI