

YORK 5 (YOK-80041)**Product description**

300x1200 mm - Opal cover

**Luminaire Structure**

- Formed sheet steel body with powder coating
- White painted metal sheet

- Stainless steel fasteners in grade 316
- Micro prismatic, opal, perforated cover and double parabolic louvre options

- Remote driver is included
- Two sizes: 600x600 mm & 300x1200 mm

Product colour


03 - White (RAL 9003) 10 - White (RAL 9016)

YORK 5 (YOK-80041)

Technical information

Material	Aluminium	Input voltage	220-240 V 50/60 Hz	CIE flux code n°3	96
Light source	120 LED	Optic	G	Dimming type	On/Off, DALI
Power	50 W	Optic value	112°	Product colours	White
Lumen	5600 lm	CCT / CRI	4000K CRI80	Weight	4.4 kg
Efficacy	112 lm/W	Bug	B2-U1-G1	Operating temperature	-20 °C to 40 °C
Driver option	Integral control gear	ULR	0%	Variants (On/Off, DALI)	Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)
Driver	Constant current (CC)	ULOR	0%		

YOK-80041

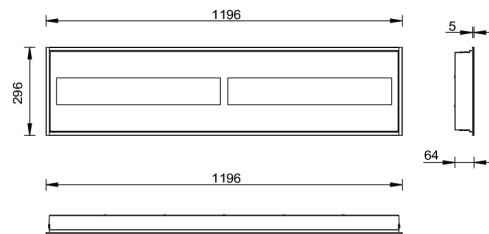

Accessories



DALI Control System
Control-DALI