

ZEAT 1 (ZE-50019)



Product description

Without remote box IP-rated - With remote driver - Constant current (CC) 350 mA - Class III



Luminaire Structure

- Die-cast aluminium housing and frame
- Pre-treated before powder coating ensuring high corrosion resistance
- Single cable entry
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)


- Durable silicone rubber gasket
- High-efficiency PMMA lens
- Clear toughened glass
- Remote driver (included)

- Remote box IP-rated is not included and is to be ordered separately for constant current (CC) products


Optic



Product colour

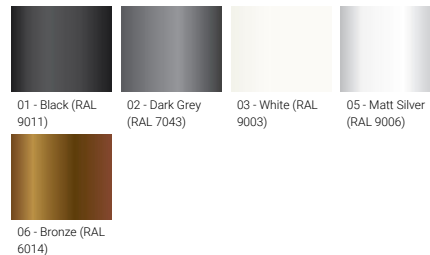

Special finishes upon request

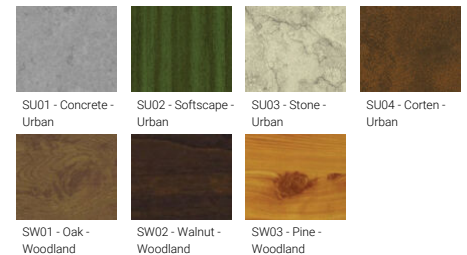


ZEAT 1 (ZE-50019)

Technical information

Material	Aluminium	Optic	M, W, VW, EW	Product colours	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland	
Light source	1 COB	Optic value	24°, 31°, 48°, 62°x58°			
Power	14 W	CCT / CRI	3000K CRI80, 4000K CRI80			
Lumen	1048 - 1274 lm	Bug	B1-U1-G1, B1-U2-G1, B2-U1-G1			
Efficacy	75 - 91 lm/W	ULR	0.75%, 0.85%, 0.92%, 1.30%			
Driver option	Remote driver (included)	ULOR	0.75%, 0.85%, 0.92%, 1.30%			
Driver	Constant current (CC)	CIE flux code n°3	97, 98			
Input voltage	350 mA, 36 VDC	Dimming type	On/Off, 1-10V, DALI			
					Weight	1.0 kg
					Operating temperature	-20 °C to 40 °C
				Through wiring	Single cable entry	
				Lens / Reflector / Optic	High-efficiency PMMA lens, Clear toughened glass	
				MacAdam Ellipse	3 SDCM	
				Lifetime L90B10 (hours)	> 61,000	
				Variants (On/Off, 1-10V, DALI)	Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)	

ZE-50019

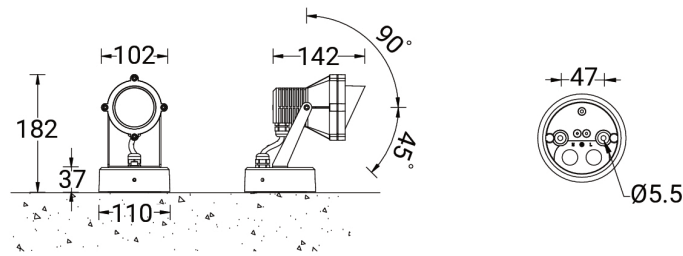

Accessories



Mounting belt
A50291



Remote box IP65
A80191



DALI Control System
Control-DALI