

ZEAT 1 (ZE-50020)



Product description

Without remote box IP-rated - With remote driver - Constant current (CC) 700 mA - Class III



Luminaire Structure

- Die-cast aluminium housing and frame
- Pre-treated before powder coating ensuring high corrosion resistance
- Single cable entry
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)

- Durable silicone rubber gasket
- High-efficiency PMMA lens
- Clear toughened glass
- Remote driver (included)


- Remote box IP-rated is not included and is to be ordered separately for constant current (CC) products

Optic




VN

Product colour

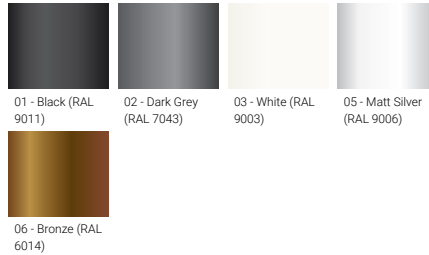

Special finishes upon request

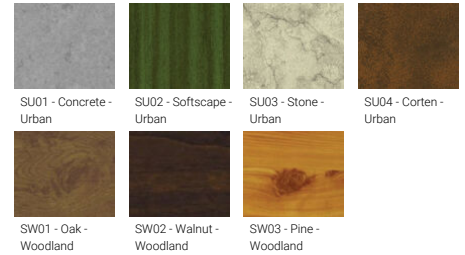


ZEAT 1 (ZE-50020)

Technical information

Material	Aluminium	Optic	VN	Lens / Reflector / Optic	High-efficiency PMMA lens, Clear toughened glass	
Light source	1 LED	Optic value	8°	MacAdam Ellipse	3 SDCM	
Power	11 W	CCT / CRI	3000K CRI80, 4000K CRI80	Lifetime L90B10 (hours)	> 109,000	
Lumen	644 - 758 lm	Dimming type	On/Off, 1-10V, DALI	Lifetime L80B10 (hours)	> 109,000	
Efficacy	59 - 69 lm/W	Product colours	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape	Lifetime L80B50 (hours)	> 109,000	
Driver option	Remote driver (included)		- Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland	Variants (On/Off, 1-10V, DALI)	Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)	
Driver	Constant current (CC)					
Input voltage	700 mA, 12 VDC					
		Weight	1.0 kg			
		Operating temperature	-20 °C to 40 °C			
		Through wiring	Single cable entry			

ZE-50020

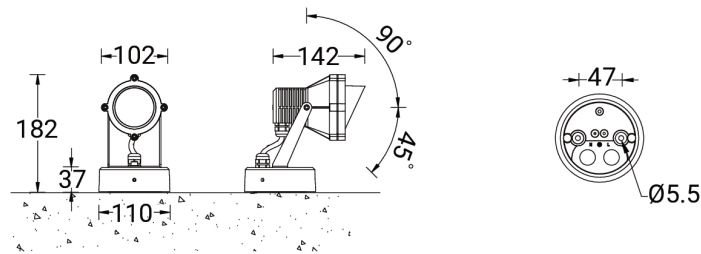

Accessories



Mounting belt
A50291



Remote box IP65
A80191



DALI Control System
Control-DALI