

**ZEAT 2 (ZE-50029)**



**Product description**

Without remote box IP-rated - With remote driver / spike - Constant current (CC) 350 mA - Class III



**Luminaire Structure**

- Die-cast aluminium housing and frame
- Pre-treated before powder coating ensuring high corrosion resistance
- Single cable entry
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)


- Durable silicone rubber gasket
- High-efficiency PMMA lens
- Clear toughened glass
- Remote driver (included)

- Remote box IP-rated is not included and is to be ordered separately for constant current (CC) products

**Optic**



**Product colour**

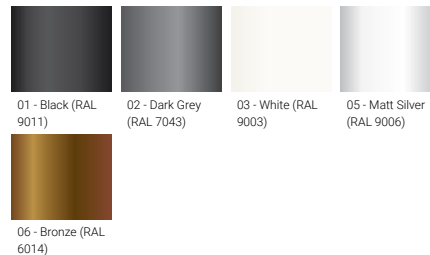

**Special finishes upon request**




**ZEAT 2 (ZE-50029)**

**Technical information**

<b>Material</b>	Aluminium	<b>Optic</b>	M, W, VW, EW	<b>Product colours</b>	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland
<b>Light source</b>	1 COB	<b>Optic value</b>	24°, 31°, 48°, 62°x58°	<b>Weight</b>	1.2 kg
<b>Power</b>	14 W	<b>CCT / CRI</b>	3000K CRI80, 4000K CRI80	<b>Operating temperature</b>	-20 °C to 40 °C
<b>Lumen</b>	1048 - 1274 lm	<b>Bug</b>	B1-U1-G1, B1-U2-G1, B2-U1-G1	<b>Through wiring</b>	Single cable entry
<b>Efficacy</b>	75 - 91 lm/W	<b>ULR</b>	0.75%, 0.85%, 0.92%, 1.30%	<b>Lens / Reflector / Optic</b>	High-efficiency PMMA lens, Clear toughened glass
<b>Driver option</b>	Remote driver (included)	<b>ULOR</b>	0.75%, 0.85%, 0.92%, 1.30%	<b>MacAdam Ellipse</b>	3 SDCM
<b>Driver</b>	Constant current (CC)	<b>CIE flux code n°3</b>	97, 98	<b>Lifetime L90B10 (hours)</b>	> 61,000
<b>Input voltage</b>	350 mA, 36 VDC	<b>Dimming type</b>	On/Off, 1-10V, DALI	<b>Variants (On/Off, 1-10V, DALI)</b>	Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)

**ZE-50029**

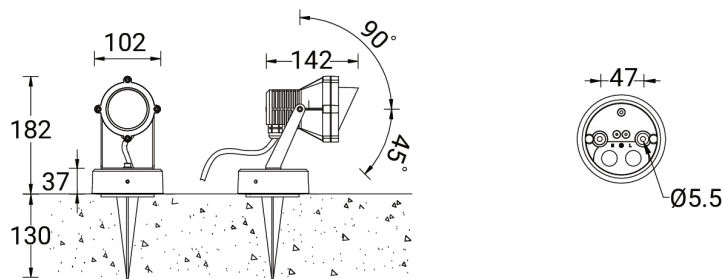

**Accessories**



Remote box IP65  
**A80191**



DALI Control System  
**Control-DALI**