

ZEAT 2 (ZE-50030)



Product description

Without remote box IP-rated - With remote driver / spike - Constant current (CC) 700 mA - Class III



Luminaire Structure

- Die-cast aluminium housing and frame
- Pre-treated before powder coating ensuring high corrosion resistance
- Single cable entry
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)

- Durable silicone rubber gasket
- High-efficiency PMMA lens
- Clear toughened glass
- Remote driver (included)


- Remote box IP-rated is not included and is to be ordered separately for constant current (CC) products

Optic




VN

Product colour

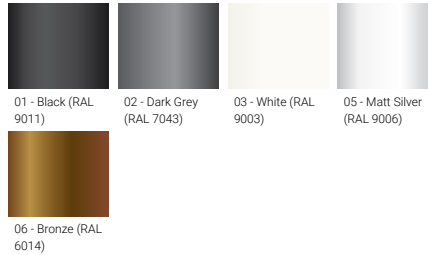

- 01 - Black (RAL 9011)
- 02 - Dark Grey (RAL 7043)
- 03 - White (RAL 9003)
- 05 - Matt Silver (RAL 9006)
- 06 - Bronze (RAL 6014)

Special finishes upon request

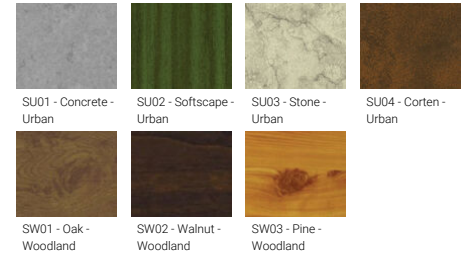


- SU01 - Concrete - Urban
- SU02 - Softscape - Urban
- SU03 - Stone - Urban
- SU04 - Corten - Urban
- SW01 - Oak - Woodland
- SW02 - Walnut - Woodland
- SW03 - Pine - Woodland

ZEAT 2 (ZE-50030)

Technical information

| | | | | | | |
|----------------------|--------------------------|------------------------------|--|---------------------------------------|---|--|
| Material | Aluminium | Optic | VN | Lens / Reflector / Optic | High-efficiency PMMA lens, Clear toughened glass | |
| Light source | 1 LED | Optic value | 8° | MacAdam Ellipse | 3 SDCM | |
| Power | 11 W | CCT / CRI | 3000K CRI80, 4000K CRI80 | Lifetime L90B10 (hours) | > 109,000 | |
| Lumen | 644 - 758 lm | Dimming type | On/Off, 1-10V, DALI | Lifetime L80B10 (hours) | > 109,000 | |
| Efficacy | 59 - 69 lm/W | Product colours | Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland | Lifetime L80B50 (hours) | > 109,000 | |
| Driver option | Remote driver (included) | | | Variants (On/Off, 1-10V, DALI) | Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0) | |
| Driver | Constant current (CC) | | | | | |
| Input voltage | 700 mA, 12 VDC | | | | | |
| | | Weight | 1.2 kg | | | |
| | | Operating temperature | -20 °C to 40 °C | | | |
| | | Through wiring | Single cable entry | | | |

ZE-50030

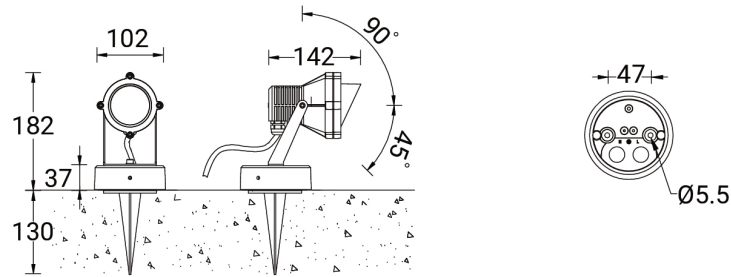

Accessories



Remote box IP65
A80191



DALI Control System
Control-DALI