

ZEAT 2 (ZE-50030)



Product description

Without remote box IP-rated - With remote driver / spike - Constant current (CC) 700 mA - Class III



microPrim™

Luminaire Structure

- Die-cast aluminium housing and frame
- Pre-treated before powder coating ensuring high corrosion resistance
- Single cable entry
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)

- Durable silicone rubber gasket
- High-efficiency PMMA lens
- Clear toughened glass
- Remote driver (included)


- Remote box IP-rated is not included and is to be ordered separately for constant current (CC) products

Optic




VN

Product colour

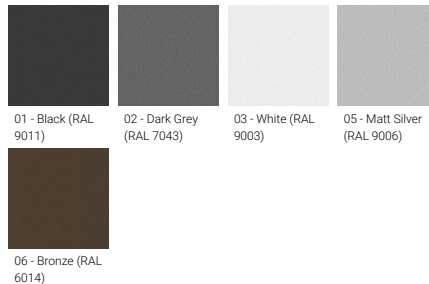

Special finishes upon request

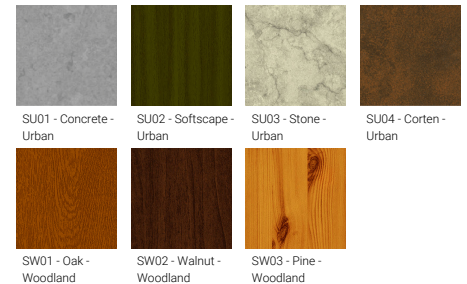

ZEAT 2 (ZE-50030)


Technical information

Material	Aluminium
Light source	1 LED
Power	11 W
Lumen	644 - 758 lm
Efficacy	59 - 69 lm/W
Driver option	Remote driver (included)
Driver	Constant current (CC)
Input voltage	700 mA, 12 VDC
Optic	VN

Optic value	8°
CCT / CRI	3000K CRI80, 4000K CRI80
ULR	<1%
ULOR	<1%
CIE flux code n°3	100
Dimming type	On/Off, 1-10V, DALI
Product colours	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland
Weight	1.2 kg
Operating temperature	-20 °C to 40 °C

EPA (m2)	0.021
Through wiring	Single cable entry
Lens / Reflector / Optic	High-efficiency PMMA lens, Clear toughened glass
MacAdam Ellipse	3 SDCM
Lifetime L90B10 (hours)	> 109,000
Lifetime L80B10 (hours)	> 109,000
Lifetime L80B50 (hours)	> 109,000
Variants (On/Off, 1-10V, DALI)	Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)

ZE-50030

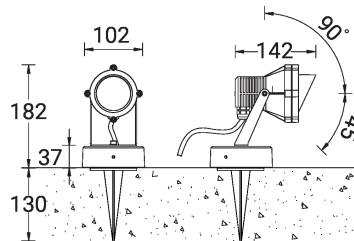

ZEAT 2 (ZE-50030)**Accessory**



Remote box IP65
A80191



DALI Control System
Control-DALI
