

ZEAT 3 (ZE-50391)**Product description**

Integral control gear - Class I

**Luminaire Structure**

- Die-cast aluminium housing and frame
- Pre-treated before powder coating ensuring high corrosion resistance
- Single cable entry, through wiring upon request
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)

- Durable silicone rubber gasket
- High-efficiency PMMA lens
- Clear toughened glass
- Integral control gear

- Remote box IP-rated is not included and is to be ordered separately for constant current (CC) products

Optic**M****W****VW****Product colour**

01 - Black (RAL 9011)


02 - Dark Grey (RAL 7043)

03 - White (RAL 9003)

05 - Matt Silver (RAL 9006)



06 - Bronze (RAL 6014)

Special finishes upon request

SU01 - Concrete - Urban


SU02 - Softscape - Urban

SU03 - Stone - Urban

SU04 - Corten - Urban



SW01 - Oak - Woodland



SW02 - Walnut - Woodland




SW03 - Pine - Woodland

ZEAT 3 (ZE-50391)

Technical information

Material	Aluminium	Optic	M, W, VW, EW	Product colours	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland
Light source	1 COB	Optic value	24°, 31°, 48°, 62°x58°	Weight	1.5 kg
Power	14 W	CCT / CRI	3000K CRI80, 4000K CRI80	Operating temperature	-20 °C to 40 °C
Lumen	1048 - 1274 lm	Bug	B1-U1-G1, B1-U2-G1, B2-U1-G1	Through wiring	Single cable entry, through wiring upon request
Efficacy	75 - 91 lm/W	ULR	0.75%, 0.85%, 0.92%, 1.30%	Lens / Reflector / Optic	High-efficiency PMMA lens, Clear toughened glass
Driver option	Integral control gear	ULOR	0.75%, 0.85%, 0.92%, 1.30%	MacAdam Ellipse	3 SDCM
Driver	Constant current (CC)	CIE flux code n°3	97, 98	Lifetime L90B10 (hours)	> 61,000
Input voltage	220-240 V 50/60 Hz	Dimming type	On/Off, 1-10V, DALI	Variants (On/Off, 1-10V, DALI)	Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)

ZE-50391

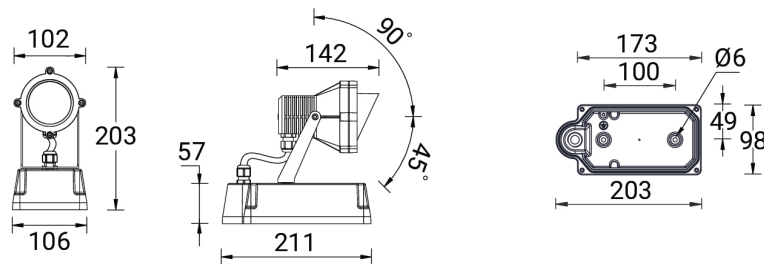

Accessories



Ground spike
A50141



Mounting belt
A50291



DALI Control System
Control-DALI