

ZEAT 3 (ZE-50392)



Product description

Integral control gear - Class I



Luminaire Structure

- Die-cast aluminium housing and frame
- Pre-treated before powder coating ensuring high corrosion resistance
- Single cable entry, through wiring upon request
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)

- Durable silicone rubber gasket
- High-efficiency PMMA lens
- Clear toughened glass
- Integral control gear


- Remote box IP-rated is not included and is to be ordered separately for constant current (CC) products

Optic




VN

Product colour

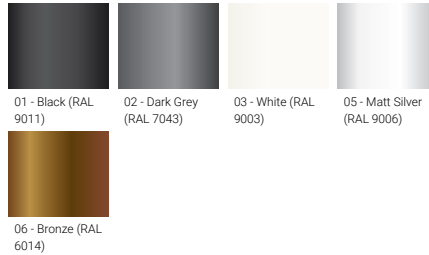

- 01 - Black (RAL 9011)
- 02 - Dark Grey (RAL 7043)
- 03 - White (RAL 9003)
- 05 - Matt Silver (RAL 9006)
- 06 - Bronze (RAL 6014)

Special finishes upon request

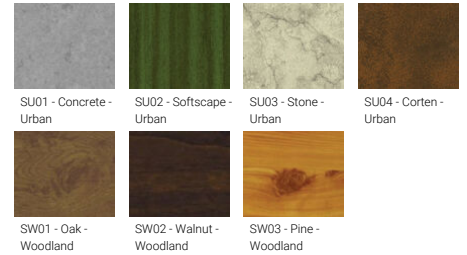


- SU01 - Concrete - Urban
- SU02 - Softscape - Urban
- SU03 - Stone - Urban
- SU04 - Corten - Urban
- SW01 - Oak - Woodland
- SW02 - Walnut - Woodland
- SW03 - Pine - Woodland

ZEAT 3 (ZE-50392)

Technical information

Material	Aluminium	Optic	VN	Lens / Reflector / Optic	High-efficiency PMMA lens, Clear toughened glass	
Light source	1 LED	Optic value	8°	MacAdam Ellipse	3 SDCM	
Power	11 W	CCT / CRI	3000K CRI80, 4000K CRI80	Lifetime L90B10 (hours)	> 109,000	
Lumen	644 - 758 lm	Dimming type	On/Off, 1-10V, DALI	Lifetime L80B10 (hours)	> 109,000	
Efficacy	59 - 69 lm/W	Product colours	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland	Lifetime L80B50 (hours)	> 109,000	
Driver option	Integral control gear			Variants (On/Off, 1-10V, DALI)	Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)	
Driver	Constant current (CC)					
Input voltage	220-240 V 50/60 Hz	Weight	1.5 kg			
		Operating temperature	-20 °C to 40 °C			
		Through wiring	Single cable entry, through wiring upon request			

ZE-50392

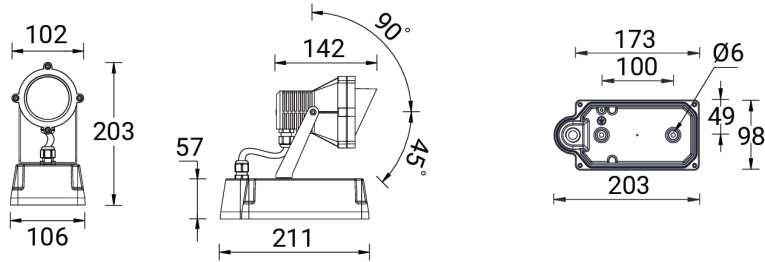

Accessories



Ground spike
A50141



Mounting belt
A50291



DALI Control System
Control-DALI