


# ARDEN



Impressive array of sophisticated workplace ambient panels. Beautiful retro-contemporary interior lighting from LIGMAN.

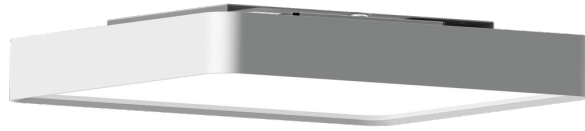


## Luminaire Structure

- Extruded aluminium bended square profile with powder coating
- Stainless steel fasteners in grade 316


- PMMA diffuser with Opal (UGR <19) and micro prismatic (UGR <13) options for better glare control
- Down light distribution only
- Passive thermal management
- Integral control gear
- Remote driver is included if dimming options require

- Wireless control available through Bluetooth connection
- Emergency module (1 or 3 hours) is available upon request with 3 options (BASIC, SELF-TEST, PRO-DALI)


## Feature

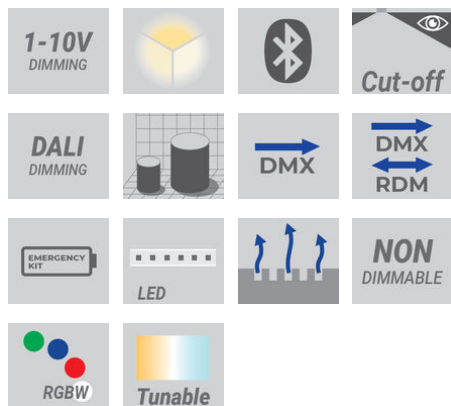


## Optic



## Product colour



## Special finishes upon request

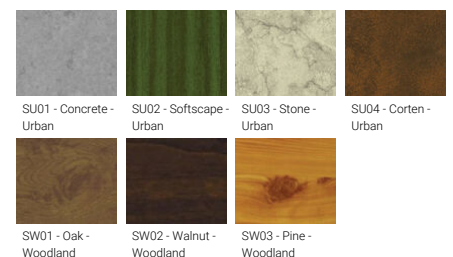

## ARDEN

## Technical information

	Model number	Light source	Power	Lumen	Optic	CCT / CRI	Dimming type	Weight	
<b>Down - 315 mm</b>									
ARDEN 3	<b>ARD-80201</b>	168 LED	15 W	1505 - 1723 lm	O [108°, P [93°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	2.8 kg	
ARDEN 3	<b>ARD-80202</b>	168 LED	21 W	2133 - 2445 lm	O [108°, P [93°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	2.8 kg	
<b>Down - 315 mm - RGBW</b>									
ARDEN 3	<b>ARD-80204</b>	672 LED	34 W	635 lm	O [108°, P [93°]	RGBW40	Bluetooth	2.8 kg	
<b>Down - 315 mm - RGBW DMX</b>									
ARDEN 3	<b>ARD-80205</b>	672 LED	34 W	635 lm	O [108°, P [93°]	RGBW40	DMX, DMX/RDM	2.8 kg	
<b>Down - 315 mm - TW</b>									
ARDEN 3	<b>ARD-80203</b>	336 LED	21 W	1720 - 2004 lm	O [108°, P [93°]	TW (2700K - 6500K)	DALI	2.8 kg	
<b>Down - 375 mm</b>									
ARDEN 3	<b>ARD-80211</b>	288 LED	27 W	2821 - 3154 lm	O [108°, P [93°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	3.8 kg	
ARDEN 3	<b>ARD-80212</b>	288 LED	38 W	4036 - 4500 lm	O [108°, P [93°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	3.8 kg	
<b>Down - 375 mm - RGBW</b>									
ARDEN 3	<b>ARD-80214</b>	1152 LED	36 W	1089 lm	O [108°, P [93°]	RGBW40	Bluetooth	3.8 kg	
<b>Down - 375 mm - RGBW DMX</b>									
ARDEN 3	<b>ARD-80215</b>	1152 LED	36 W	1089 lm	O [108°, P [93°]	RGBW40	DMX, DMX/RDM	3.8 kg	
<b>Down - 375 mm - TW</b>									
ARDEN 3	<b>ARD-80213</b>	576 LED	29 W	3041 - 3456 lm	O [108°, P [93°]	TW (2700K - 6500K)	DALI	3.8 kg	
<b>Down - 480 mm</b>									
ARDEN 3	<b>ARD-80221</b>	480 LED	41 W	4805 - 5504 lm	O [108°, P [93°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	5.6 kg	
ARDEN 3	<b>ARD-80222</b>	480 LED	59 W	6857 - 7838 lm	O [108°, P [93°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	5.6 kg	
<b>Down - 480 mm - RGBW</b>									
ARDEN 3	<b>ARD-80224</b>	1920 LED	60 W	1815 lm	O [108°, P [93°]	RGBW40	Bluetooth	5.6 kg	
<b>Down - 480 mm - RGBW DMX</b>									
ARDEN 3	<b>ARD-80225</b>	1920 LED	60 W	1815 lm	O [108°, P [93°]	RGBW40	DMX, DMX/RDM	5.6 kg	
<b>Down - 480 mm - TW</b>									
ARDEN 3	<b>ARD-80223</b>	960 LED	48 W	5281 - 5951 lm	O [108°, P [93°]	TW (2700K - 6500K)	DALI	5.6 kg	

We reserve the right to make technical and design changes.

01:25, 01-05-2024

<https://www.ligman.com/arden-surface-ceiling-luminaires-ar-cei>  
3/








## THAILAND

LIGMAN Lighting Co.,Ltd.  
17/2 Moo 4, Monthong, Bang Nam Prio,  
24150 Chachoengsao - Thailand  
[info@ligman.com](mailto:info@ligman.com)

# ARDEN

Down - 595 mm									
ARDEN 3	<b>ARD-80231</b>	672 LED	49 W	5851 - 6649 lm	O [108°, P [93°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	7.4 kg	
ARDEN 3	<b>ARD-80232</b>	672 LED	73 W	8704 - 9887 lm	O [108°, P [93°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	7.4 kg	
Down - 595 mm - RGBW DMX									
ARDEN 3	<b>ARD-80235</b>	2688 LED	84 W	2541 lm	O [108°, P [93°]	RGBW40	DMX, DMX/RDM	7.4 kg	
Down - 595 mm - RGBW									
ARDEN 3	<b>ARD-80234</b>	2688 LED	84 W	2541 lm	O [108°, P [93°]	RGBW40	Bluetooth	7.4 kg	
Down - 595 mm - TW									
ARDEN 3	<b>ARD-80233</b>	1344 LED	67 W	9295 lm	O [108°, P [93°]	TW (2700K - 6500K)	DALI	7.4 kg	
Down - 875 mm									
ARDEN 3	<b>ARD-80241</b>	1512 LED	108 W	12630 - 14846 lm	O [108°, P [93°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	14.6 kg	
ARDEN 3	<b>ARD-80242</b>	1512 LED	162 W	18910 - 22203 lm	O [108°, P [93°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	14.6 kg	
Down - 875 mm - RGBW									
ARDEN 3	<b>ARD-80244</b>	6048 LED	189 W	5716 lm	O [108°, P [93°]	RGBW40	Bluetooth	14.6 kg	
Down - 875 mm - RGBW DMX									
ARDEN 3	<b>ARD-80245</b>	6048 LED	189 W	5716 lm	O [108°, P [93°]	RGBW40	DMX, DMX/RDM	14.6 kg	
Down - 875 mm - TW									
ARDEN 3	<b>ARD-80243</b>	3024 LED	151 W	20913 lm	O [108°, P [93°]	TW (2700K - 6500K)	DALI	14.6 kg	

## Accessories

	 Recessing box <b>A61051</b>	 Pharos - POE Connect <b>A64591</b>	 Wireless bluetooth converter <b>A90291</b>	 Xpress wireless switch <b>A90591</b>	 Decorative pattern - Type A for ARDEN 300 mm <b>A91421</b>	 Decorative pattern - Type A for ARDEN 400 mm <b>A91521</b>	 Decorative pattern - Type A for ARDEN 500 mm <b>A91621</b>
ARD-80201			•	•	•		
ARD-80202			•	•	•		
ARD-80203			•	•	•		
ARD-80204	•			•	•		
ARD-80205	•	•			•		
ARD-80211			•	•		•	
ARD-80212			•	•		•	
ARD-80213			•	•		•	
ARD-80214	•			•		•	
ARD-80215	•	•				•	
ARD-80221			•	•			•
ARD-80222			•	•			•
ARD-80223			•	•			•

We reserve the right to make technical and design changes.








01:25, 01-05-2024








<https://www.ligman.com/arden-surface-ceiling-luminaires-ar-cei>  
3/

**THAILAND**  
LIGMAN Lighting Co.,Ltd.  
17/2 Moo 4, Monthong, Bang Nam Prio, 24150 Chachoengsao - Thailand  
[info@ligman.com](mailto:info@ligman.com)

ARDEN

ARD-80224	•				•	
ARD-80225	•	•				•
ARD-80231			•	•		
ARD-80232			•	•		
ARD-80233			•	•		
ARD-80234	•		•	•		
ARD-80235	•	•			•	
ARD-80241			•	•		
ARD-80242			•	•		
ARD-80243			•	•		
ARD-80244	•			•		
ARD-80245	•	•			•	

	 Decorative pattern - Type A for ARDEN 600 mm. <b>A91721</b>	 Decorative pattern - Type A for ARDEN 900 mm <b>A91821</b>	 Decorative pattern - Type B for ARDEN 300 mm <b>A92821</b>	 Decorative pattern - Type B for ARDEN 400 mm <b>A92921</b>	 Decorative pattern - Type B for ARDEN 500 mm <b>A93021</b>	 Decorative pattern - Type B for ARDEN 600 mm <b>A93121</b>	 Decorative pattern - Type B for ARDEN 900 mm <b>A93221</b>
ARD-80201			•				
ARD-80202			•				
ARD-80203			•				
ARD-80204			•				
ARD-80205			•				
ARD-80211				•			
ARD-80212				•			
ARD-80213				•			
ARD-80214				•			
ARD-80215				•			
ARD-80221					•		
ARD-80222					•		
ARD-80223					•		
ARD-80224					•		
ARD-80225					•		
ARD-80231	•					•	
ARD-80232	•					•	
ARD-80233	•					•	
ARD-80234	•					•	
ARD-80235			•				
ARD-80241		•					•
ARD-80242		•					•
ARD-80243		•					•
ARD-80244		•					•
ARD-80245			•				

	 Decorative pattern - Type C for ARDEN for ARDEN 300 mm <b>A94221</b>	 Decorative pattern - Type C for ARDEN for ARDEN 400 mm <b>A94321</b>	 Decorative pattern - Type C for ARDEN for ARDEN 500 mm <b>A94421</b>	 Decorative pattern - Type C for ARDEN for ARDEN 600 mm <b>A94521</b>	 Decorative pattern - Type C for ARDEN for ARDEN 900 mm <b>A94621</b>	 DALI Control System <b>Control-DALI</b>	 DMX Control System <b>Control-DMX</b>
ARD-80201	•					•	
ARD-80202	•					•	
ARD-80203	•					•	
ARD-80204	•					•	
ARD-80205	•						•
ARD-80211		•				•	
ARD-80212		•				•	
ARD-80213		•				•	
ARD-80214		•				•	

We reserve the right to make technical and design changes.


01:25, 01-05-2024

<https://www.ligman.com/arden-surface-ceiling-luminaires-ar-cei>  
3/

**THAILAND**  
LIGMAN Lighting Co.,Ltd.  
17/2 Moo 4, Monthong, Bang Nam Prio, 24150 Chachoengsao - Thailand  
[info@ligman.com](mailto:info@ligman.com)

# ARDEN


ARD-80215	•			•
ARD-80221		•		•
ARD-80222		•		•
ARD-80223		•		•
ARD-80224		•		•
ARD-80225		•		•
ARD-80231			•	•
ARD-80232			•	•
ARD-80233			•	•
ARD-80234			•	•
ARD-80235	•			•
ARD-80241			•	•
ARD-80242			•	•
ARD-80243			•	•
ARD-80244			•	•
ARD-80245	•			•

 <b>DMX/RDM Control System</b> <b>Control-DMX-RDM</b>	 <b>Emergency module - 250V - BASIC</b> <b>EM250V-BA</b>	 <b>Emergency module - 250V - PRO-DALI</b> <b>EM250V-DA</b>	 <b>Emergency module - 250V - SELF-TEST</b> <b>EM250V-ST</b>
--	---	--	---


ARD-80201				
ARD-80202				
ARD-80203				
ARD-80204				
ARD-80205	•			
ARD-80211				
ARD-80212				
ARD-80213				
ARD-80214				
ARD-80215	•			
ARD-80221		•	•	•
ARD-80222		•	•	•
ARD-80223				
ARD-80224				
ARD-80225	•			
ARD-80231		•	•	•
ARD-80232		•	•	•
ARD-80233				
ARD-80234				
ARD-80235	•			
ARD-80241		•	•	•
ARD-80242		•	•	•
ARD-80243				
ARD-80244				
ARD-80245	•			

**ARDEN**


ARD-80201, ARD-80202, ARD-80203  
ARD-80204, ARD-80205




ARD-80211, ARD-80212, ARD-80213  
ARD-80214, ARD-80215




ARD-80221, ARD-80222, ARD-80223  
ARD-80224, ARD-80225



ARD-80231, ARD-80232, ARD-80233  
ARD-80234, ARD-80235

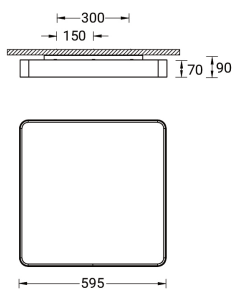

ARD-80241, ARD-80242, ARD-80243  
ARD-80244, ARD-80245

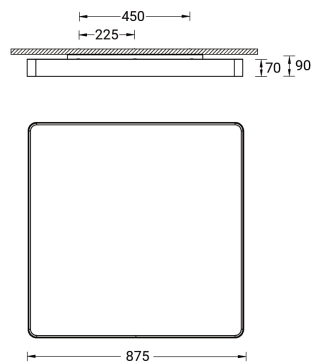

**ARDEN**

ARDEN  
**Recessed ceiling luminaires**

Impressive array of sophisticated workplace ambient panels. Beautiful retro-contemporary interior lighting from LIGMAN.

<https://www.ligman.com/arden-recessed-ceiling-luminaires-ar-rec3/>



ARDEN  
**Pendant luminaires**

Impressive array of sophisticated workplace ambient panels. Beautiful retro-contemporary interior lighting from LIGMAN.

<https://www.ligman.com/arden-pendant-luminaires-ar-pen3/>