

GAVLE



Comprehensive range of clean-edged interior circular ring fixtures. Powerful and technical performance options shrouded in a minimalist aesthetic form.




Luminaire Structure

- Extruded aluminium bended ring profile with powder coating
- Stainless steel fasteners in grade 316
- Steel brackets for ceiling down mounting option


- Opal PMMA diffuser (UGR <19) for glare control
- Up and down light distribution options
- Passive thermal management
- Integral control gear

- Remote driver is included for dimming type: 1-10V (-DI) for GAV-80101, GAV-80111, GAV-80121, GAV-80131, GAV-80141, GAV-80151, GAV-80161, GAV-80171, GAV-80201, GAV-80211, GAV-80221, GAV-80231, GAV-80241, GAV-80251, GAV-80261, GAV-80271
- Wireless control available through Bluetooth connection


Feature

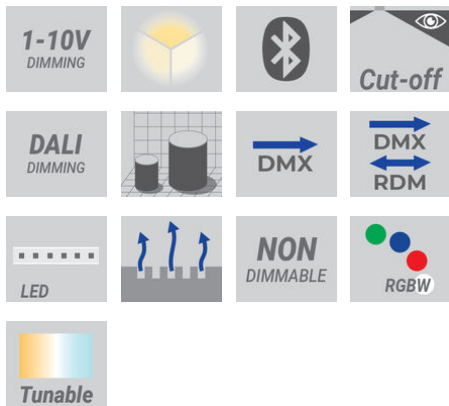


Optic



Product colour

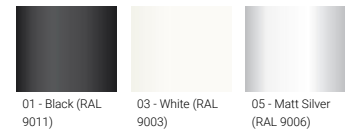

Special finishes upon request

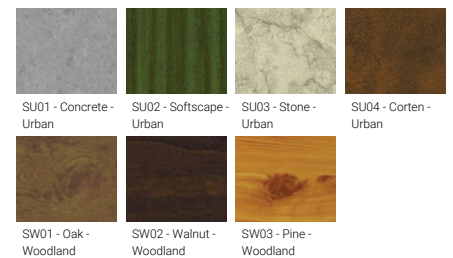

GAVLE

Technical information

	Model number	Light source	Power	Lumen	Optic	CCT / CRI	Dimming type	Weight
Down (Optic) & Up (Optic 2nd) - 100x100 mm - 1500 mm								
GAVLE 4	GAV-80521	960 & 960 LED	244 W	29116 - 30393 lm	O [Opal]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	17.5 kg
Down (Optic) & Up (Optic 2nd) - 100x100 mm - 1500 mm - TW								
GAVLE 4	GAV-80522	1920 & 1920 LED	244 W	30393 lm	O [102°]	TW (2700K - 6500K)	DALI	17.5 kg
Down (Optic) & Up (Optic 2nd) - 100x100 mm - 2000 mm								
GAVLE 4	GAV-80531	1344 & 1344 LED	346 W	40562 - 42340 lm	O [Opal]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	23.0 kg
Down (Optic) & Up (Optic 2nd) - 100x100 mm - 2000 mm - TW								
GAVLE 4	GAV-80532	2688 & 2688 LED	346 W	42340 lm	O [102°]	TW (2700K - 6500K)	DALI	23.0 kg
Down (Optic) & Up (Optic 2nd) - 100x100 mm - 2500 mm								
GAVLE 4	GAV-80541	1728 & 1728 LED	458 W	52997 - 55320 lm	O [Opal]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	31.9 kg
Down (Optic) & Up (Optic 2nd) - 100x100 mm - 2500 mm - TW								
GAVLE 4	GAV-80542	3456 & 3456 LED	458 W	55320 lm	O [102°]	TW (2700K - 6500K)	DALI	31.9 kg
Down (Optic) & Up (Optic 2nd) - 100x100 mm - 3000 mm								
GAVLE 4	GAV-80551	1920 & 1920 LED	505 W	57481 - 60002 lm	O [Opal]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	40.2 kg
Down (Optic) & Up (Optic 2nd) - 100x100 mm - 3000 mm - TW								
GAVLE 4	GAV-80552	3840 & 3840 LED	505 W	60002 lm	O [102°]	TW (2700K - 6500K)	DALI	40.2 kg
Down (Optic) & Up (Optic 2nd) - 100x100 mm - 4000 mm								
GAVLE 4	GAV-80561	2688 & 2688 LED	690 W	80474 - 84002 lm	O [Opal]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	51.3 kg
Down (Optic) & Up (Optic 2nd) - 100x100 mm - 4000 mm - TW								
GAVLE 4	GAV-80562	5376 & 5376 LED	690 W	84002 lm	O [102°]	TW (2700K - 6500K)	DALI	51.3 kg
Down (Optic) & Up (Optic 2nd) - 100x100 mm - 5000 mm								
GAVLE 4	GAV-80571	3456 & 3456 LED	915 W	105748 - 110384 lm	O [Opal]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	62.0 kg
Down (Optic) & Up (Optic 2nd) - 100x100 mm - 5000 mm - TW								
GAVLE 4	GAV-80572	6912 & 6912 LED	915 W	110384 lm	O [102°]	TW (2700K - 6500K)	DALI	62.0 kg
Down (Optic) & Up (Optic 2nd) - 60x100mm - 1000 mm								
GAVLE 3	GAV-80211	384 & 384 LED	98 W	9990 - 10428 lm	O [Opal]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	8.9 kg
Down (Optic) & Up (Optic 2nd) - 60x100mm - 1000 mm - TW								
GAVLE 3	GAV-80212	768 & 768 LED	98 W	10428 lm	O [102°]	TW (2700K - 6500K)	DALI	8.4 k
Down (Optic) & Up (Optic 2nd) - 60x100mm - 1500 mm								
GAVLE 3	GAV-80221	576 & 576 LED	146 W	15329 - 16001 lm	O [Opal]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	13.9 kg
Down (Optic) & Up (Optic 2nd) - 60x100mm - 1500 mm - TW								

We reserve the right to make technical and design changes.

01:26, 01-05-2024

<https://www.ligman.com/gavle-surface-ceiling-luminaires-ga-ce>

i3/

THAILAND

LIGMAN Lighting Co.,Ltd.
17/2 Moo 4, Monthong, Bang Nam Prioao,
24150 Chachoengsao - Thailand
info@ligman.com

GAVLE

GAVLE 3	GAV-80222	1152 & 1152 LED	146 W	16001 lm	O [102°]	TW (2700K - 6500K)	DALI	13.9 kg
Down (Optic) & Up (Optic 2nd) - 60x100mm - 2000 mm								
GAVLE 3	GAV-80231	768 & 768 LED	197 W	20035 - 20913 lm	O [Opal]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	18.7 kg
Down (Optic) & Up (Optic 2nd) - 60x100mm - 2000 mm - TW								
GAVLE 3	GAV-80232	1536 & 1536 LED	197 W	20913 lm	O [102°]	TW (2700K - 6500K)	DALI	18.7 kg
Down (Optic) & Up (Optic 2nd) - 60x100mm - 2500 mm								
GAVLE 3	GAV-80241	960 & 960 LED	250 W	25323 - 26433 lm	O [Opal]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	24.8 kg
Down (Optic) & Up (Optic 2nd) - 60x100mm - 2500 mm - TW								
GAVLE 3	GAV-80242	1920 & 1920 LED	250 W	26433 lm	O [102°]	TW (2700K - 6500K)	DALI	24.8 kg
Down (Optic) & Up (Optic 2nd) - 60x100mm - 3000 mm								
GAVLE 3	GAV-80251	1152 & 1152 LED	294 W	29041 - 30314 lm	O [Opal]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	30.9 kg
Down (Optic) & Up (Optic 2nd) - 60x100mm - 3000 mm - TW								
GAVLE 3	GAV-80252	2304 & 2304 LED	294 W	30314 lm	O [102°]	TW (2700K - 6500K)	DALI	40.1 kg
Down (Optic) & Up (Optic 2nd) - 60x100mm - 4000 mm								
GAVLE 3	GAV-80261	1536 & 1536 LED	413 W	41416 - 43232 lm	O [Opal]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	40.1 kg
Down (Optic) & Up (Optic 2nd) - 60x100mm - 4000 mm - TW								
GAVLE 3	GAV-80262	3072 & 3072 LED	413 W	43232 lm	O [102°]	TW (2700K - 6500K)	DALI	30.4 kg
Down (Optic) & Up (Optic 2nd) - 60x100mm - 5000 mm								
GAVLE 3	GAV-80271	1920 & 1920 LED	499 W	50359 - 52567 lm	O [Opal]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	48.8 kg
Down (Optic) & Up (Optic 2nd) - 60x100mm - 5000 mm - TW								
GAVLE 3	GAV-80272	3840 & 3840 LED	499 W	52567 lm	O [102°]	TW (2700K - 6500K)	DALI	48.8 kg
Down - 100x90 mm - 1500 mm								
GAVLE 4	GAV-80421	960 LED	122 W	14280 - 14907 lm	O [Opal]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	14.4 kg
Down - 100x90 mm - 1500 mm - RGBW								
GAVLE 4	GAV-80423	3840 LED	133 W	5217 lm	O [Opal]	RGBW40	Bluetooth	13.9 kg
Down - 100x90 mm - 1500 mm - RGBW DMX								
GAVLE 4	GAV-80424	3840 LED	133 W	5217 lm	O [102°]	RGBW30, RGBW40	DMX, DMX/RDM	13.9 kg
Down - 100x90 mm - 1500 mm - TW								
GAVLE 4	GAV-80422	1920 LED	122 W	14907 lm	O [102°]	TW (2700K - 6500K)	DALI	14.4 kg
Down - 100x90 mm - 2000 mm								
GAVLE 4	GAV-80431	1344 LED	173 W	20033 - 20911 lm	O [Opal]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	18.8 kg

We reserve the right to make technical and design changes.

01:26, 01-05-2024






<https://www.ligman.com/gavle-surface-ceiling-luminaires-ga-ce-i3/>

THAILAND

LIGMAN Lighting Co.,Ltd.
17/2 Moo 4, Monthong, Bang Nam Prio,
24150 Chachoengsao - Thailand
info@ligman.com



GAVLE

Down - 100x90 mm - 2000 mm - RGBW									
GAVLE 4	GAV-80433	5376 LED	187 W	7319 lm	O [Opal]	RGBW40	Bluetooth	18.8 kg	
Down - 100x90 mm - 2000 mm - RGBW DMX									
GAVLE 4	GAV-80434	5376 LED	187 W	7319 lm	O [102°]	RGBW30, RGBW40	DMX, DMX/RDM	18.8 kg	
Down - 100x90 mm - 2000 mm - TW									
GAVLE 4	GAV-80432	2688 LED	173 W	20911 lm	O [102°]	TW (2700K - 6500K)	DALI	18.8 kg	
Down - 100x90 mm - 2500 mm									
GAVLE 4	GAV-80441	1728 LED	229 W	25616 - 26739 lm	O [Opal]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	25.5 kg	
Down - 100x90 mm - 2500 mm - RGBW									
GAVLE 4	GAV-80443	6912 LED	240 W	9378 lm	O [Opal]	RGBW40	Bluetooth	25.5 kg	
Down - 100x90 mm - 2500 mm - RGBW DMX									
GAVLE 4	GAV-80444	6912 LED	240 W	9378 lm	O [102°]	RGBW30, RGBW40	DMX, DMX/RDM	25.5 kg	
Down - 100x90 mm - 2500 mm - TW									
GAVLE 4	GAV-80442	3456 LED	229 W	26793 lm	O [102°]	TW (2700K - 6500K)	DALI	25.5 kg	
Down - 100x90 mm - 3000 mm									
GAVLE 4	GAV-80451	1920 LED	253 W	28221 - 29459 lm	O [Opal]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	33.5 kg	
Down - 100x90 mm - 3000 mm - RGBW									
GAVLE 4	GAV-80453	7680 LED	267 W	10311 lm	O [Opal]	RGBW40	Bluetooth	33.5 kg	
Down - 100x90 mm - 3000 mm - RGBW DMX									
GAVLE 4	GAV-80454	7680 LED	267 W	10311 lm	O [102°]	RGBW30, RGBW40	DMX, DMX/RDM	33.5 kg	
Down - 100x90 mm - 3000 mm - TW									
GAVLE 4	GAV-80452	3840 LED	253 W	29459 lm	O [102°]	TW (2700K - 6500K)	DALI	33.5 kg	
Down - 100x90 mm - 4000 mm									
GAVLE 4	GAV-80461	2688 LED	345 W	39541 - 41275 lm	O [Opal]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	42.8 kg	
Down - 100x90 mm - 4000 mm - RGBW									
GAVLE 4	GAV-80463	10752 LED	373 W	14446 lm	O [Opal]	RGBW40	Bluetooth	42.8 kg	
Down - 100x90 mm - 4000 mm - RGBW DMX									
GAVLE 4	GAV-80464	10752 LED	373 W	14446 lm	O [102°]	RGBW30, RGBW40	DMX, DMX/RDM	42.8 kg	

We reserve the right to make technical and design changes.

01:26, 01-05-2024

<https://www.ligman.com/gavle-surface-ceiling-luminaires-ga-ce-i3/>

THAILAND

LIGMAN Lighting Co.,Ltd.
17/2 Moo 4, Monthong, Bang Nam Prioao,
24150 Chachoengsao - Thailand
info@ligman.com

GAVLE

Down - 100x90 mm - 4000 mm - TW								
GAVLE 4	GAV-80462	5376 LED	345 W	41725 lm	O [102°]	TW (2700K - 6500K)	DALI	42.8 kg
Down - 100x90 mm - 5000 mm								
GAVLE 4	GAV-80471	3456 LED	458 W	51888 - 54163 lm	O [Opal]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	50.8 kg
Down - 100x90 mm - 5000 mm - RGBW								
GAVLE 4	GAV-80473	13824 LED	480 W	18957 lm	O [Opal]	RGBW40	Bluetooth	50.8 kg 
Down - 100x90 mm - 5000 mm - RGBW DMX								
GAVLE 4	GAV-80474	13824 LED	480 W	18957 lm	O [102°]	RGBW30, RGBW40	DMX, DMX/RDM	50.8 kg 
Down - 100x90 mm - 5000 mm - TW								
GAVLE 4	GAV-80472	6912 LED	458 W	54163 lm	O [102°]	TW (2700K - 6500K)	DALI	50.8 kg
Down - 60x90 mm - 1000 mm								
GAVLE 3	GAV-80111	384 LED	49 W	4780 - 4989 lm	O [102°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	7.4 kg
Down - 60x90 mm - 1000 mm - RGBW								
GAVLE 3	GAV-80113	960 LED	53 W	1746 lm	O [102°]	RGBW30, RGBW40	Bluetooth	6.9 kg 
Down - 60x90 mm - 1000 mm - RGBW DMX								
GAVLE 3	GAV-80114	960 LED	53 W	1746 lm	O [102°]	RGBW30, RGBW40	DMX, DMX/RDM	6.9 kg 
Down - 60x90 mm - 1000 mm - TW								
GAVLE 3	GAV-80112	768 LED	49 W	4989 lm	O [102°]	TW (2700K - 6500K)	DALI	7.4 kg
Down - 60x90 mm - 1500 mm								
GAVLE 3	GAV-80121	576 LED	73 W	7339 - 7661 lm	O [102°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	11.8 kg
Down - 60x90 mm - 1500 mm - RGBW								
GAVLE 3	GAV-80123	1536 LED	86 W	2681 lm	O [102°]	RGBW30, RGBW40	Bluetooth	11.3 kg 
Down - 60x90 mm - 1500 mm - RGBW DMX								
GAVLE 3	GAV-80124	1536 LED	86 W	2681 lm	O [102°]	RGBW30, RGBW40	DMX, DMX/RDM	11.3 kg 
Down - 60x90 mm - 1500 mm - TW								
GAVLE 3	GAV-80122	1152 LED	73 W	7661 lm	O [102°]	TW (2700K - 6500K)	DALI	11.8 kg
Down - 60x90 mm - 2000 mm								
GAVLE 3	GAV-80131	768 LED	98 W	9597 - 10018 lm	O [102°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	15.8 kg
Down - 60x90 mm - 2000 mm - RGBW								

We reserve the right to make technical and design changes.


01:26, 01-05-2024

<https://www.ligman.com/gavle-surface-ceiling-luminaires-ga-ce-i3/>

THAILAND

LIGMAN Lighting Co.,Ltd.
17/2 Moo 4, Monthong, Bang Nam Prioao,
24150 Chachoengsao - Thailand
info@ligman.com

GAVLE

GAVLE 3	GAV-80133	1920 LED	108 W	3506 lm	O [102°]	RGBW30, RGBW40	Bluetooth	15.4 kg	
Down - 60x90 mm - 2000 mm - RGBW DMX									
GAVLE 3	GAV-80134	1920 LED	108 W	3506 lm	O [102°]	RGBW30, RGBW40	DMX, DMX/RDM	15.4 kg	
Down - 60x90 mm - 2000 mm - TW									
GAVLE 3	GAV-80132	1536 LED	98 W	10018 lm	O [102°]	TW (2700K - 6500K)	DALI	15.8 kg	
Down - 60x90 mm - 2500 mm									
GAVLE 3	GAV-80141	960 LED	125 W	12172 - 12705 lm	O [102°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	20.5 kg	
Down - 60x90 mm - 2500 mm - RGBW									
GAVLE 3	GAV-80143	2688 LED	148 W	4447 lm	O [102°]	RGBW30, RGBW40	Bluetooth	20.0 kg	
Down - 60x90 mm - 2500 mm - RGBW DMX									
GAVLE 3	GAV-80144	2688 LED	148 W	4447 lm	O [102°]	RGBW30, RGBW40	DMX, DMX/RDM	20.0 kg	
Down - 60x90 mm - 2500 mm - TW									
GAVLE 3	GAV-80142	1920 LED	125 W	12705 lm	O [102°]	TW (2700K - 6500K)	DALI	20.5 kg	
Down - 60x90 mm - 3000 mm									
GAVLE 3	GAV-80151	1152 LED	147 W	13216 - 13795 lm	O [102°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	25.5 kg	
Down - 60x90 mm - 3000 mm - RGBW									
GAVLE 3	GAV-80153	3072 LED	168 W	4828 lm	O [102°]	RGBW30, RGBW40	Bluetooth	39.4 kg	
Down - 60x90 mm - 3000 mm - RGBW DMX									
GAVLE 3	GAV-80154	3072 LED	168 W	4828 lm	O [102°]	RGBW30, RGBW40	DMX, DMX/RDM	25.0 kg	
Down - 60x90 mm - 3000 mm - TW									
GAVLE 3	GAV-80152	2304 LED	147 W	13795 lm	O [102°]	TW (2700K - 6500K)	DALI	33.8 kg	
Down - 60x90 mm - 4000 mm									
GAVLE 3	GAV-80161	1536 LED	206 W	20187 - 21072 lm	O [102°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	33.8 kg	
Down - 60x90 mm - 4000 mm - RGBW									
GAVLE 3	GAV-80163	3840 LED	216 W	7375 lm	O [102°]	RGBW30, RGBW40	Bluetooth	25.0 kg	
Down - 60x90 mm - 4000 mm - RGBW DMX									
GAVLE 3	GAV-80164	3840 LED	216 W	7375 lm	O [102°]	RGBW30, RGBW40	DMX, DMX/RDM	39.4 kg	

We reserve the right to make technical and design changes.



01:26, 01-05-2024

<https://www.ligman.com/gavle-surface-ceiling-luminaires-ga-ce-i3/>








THAILAND

LIGMAN Lighting Co.,Ltd.
17/2 Moo 4, Monthong, Bang Nam Prioao,
24150 Chachoengsao - Thailand
info@ligman.com

GAVLE

Down - 60x90 mm - 4000 mm - TW								
GAVLE 3	GAV-80162	3072 LED	206 W	21072 lm	O [102°]	TW (2700K - 6500K)	DALI	25.5 kg
Down - 60x90 mm - 5000 mm								
GAVLE 3	GAV-80171	1920 LED	250 W	23765 - 24807 lm	O [102°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	40.6 kg
Down - 60x90 mm - 5000 mm - RGBW								
GAVLE 3	GAV-80173	5376 LED	296 W	8682 lm	O [102°]	RGBW30, RGBW40	Bluetooth	40.1 kg 
Down - 60x90 mm - 5000 mm - RGBW DMX								
GAVLE 3	GAV-80174	5376 LED	296 W	8682 lm	O [102°]	RGBW30, RGBW40	DMX, DMX/RDM	40.1 kg 
Down - 60x90 mm - 5000 mm - TW								
GAVLE 3	GAV-80172	3840 LED	250 W	24807 lm	O [102°]	TW (2700K - 6500K)	DALI	40.6 kg

Accessories

	 Recessing box A61051	 Ceiling-mounting bracket (40 mm profile) A81381	 Ceiling-mounting bracket (60 mm profile) A81481	 Wireless bluetooth converter A90291	 Xpress wireless switch A90591	 DALI Control System Control-DALI	 DMX Control System Control-DMX
GAV-80111							
GAV-80112							
GAV-80113							
GAV-80114							
GAV-80121							
GAV-80122							
GAV-80123							
GAV-80124							
GAV-80131							
GAV-80132							
GAV-80133							
GAV-80134							
GAV-80141							
GAV-80142							
GAV-80143							
GAV-80144							
GAV-80151							
GAV-80152							
GAV-80153							
GAV-80154							
GAV-80161							
GAV-80162							
GAV-80163							
GAV-80164							
GAV-80171							
GAV-80172							
GAV-80173							
GAV-80174							
GAV-80211							
GAV-80212							
GAV-80221							

We reserve the right to make technical and design changes.

01:26, 01-05-2024


<https://www.ligman.com/gavle-surface-ceiling-luminaires-ga-ce-i3/>

THAILAND

LIGMAN Lighting Co.,Ltd.
17/2 Moo 4, Monthong, Bang Nam Prioao,
24150 Chachoengsao - Thailand
info@ligman.com

GAVLE

GAV-80222			•	•	•
GAV-80231			•	•	•
GAV-80232			•	•	•
GAV-80241			•	•	•
GAV-80242			•	•	•
GAV-80251			•	•	•
GAV-80252			•	•	•
GAV-80261			•	•	•
GAV-80262			•	•	•
GAV-80271			•	•	•
GAV-80272			•	•	•
GAV-80421		•	•	•	•
GAV-80422		•	•	•	•
GAV-80423	•	•	•	•	•
GAV-80424	•				•
GAV-80431		•	•	•	•
GAV-80432		•	•	•	•
GAV-80433	•	•		•	•
GAV-80434	•				•
GAV-80441		•	•	•	•
GAV-80442		•	•	•	•
GAV-80443	•	•		•	•
GAV-80444	•				•
GAV-80451		•	•	•	•
GAV-80452		•	•	•	•
GAV-80453	•	•		•	•
GAV-80454	•				•
GAV-80461		•	•	•	•
GAV-80462		•	•	•	•
GAV-80463	•	•		•	•
GAV-80464	•				•
GAV-80471		•	•	•	•
GAV-80472		•	•	•	•
GAV-80473	•	•		•	•
GAV-80474	•				•
GAV-80521			•	•	•
GAV-80522			•	•	•
GAV-80531			•	•	•
GAV-80532			•	•	•
GAV-80541			•	•	•
GAV-80542			•	•	•
GAV-80551			•	•	•
GAV-80552			•	•	•
GAV-80561			•	•	•
GAV-80562			•	•	•
GAV-80571			•	•	•
GAV-80572			•	•	•



GAV-80111	
GAV-80112	
GAV-80113	
GAV-80114	•
GAV-80121	
GAV-80122	
GAV-80123	
GAV-80124	•

We reserve the right to make technical and design changes.

01:26, 01-05-2024

<https://www.ligman.com/gavle-surface-ceiling-luminaires-ga-gce-i3/>

THAILAND

LIGMAN Lighting Co.,Ltd.
17/2 Moo 4, Monthong, Bang Nam Prio, 24150 Chachoengsao - Thailand
info@ligman.com

GAVLE

GAV-80131	
GAV-80132	
GAV-80133	
GAV-80134	•
GAV-80141	
GAV-80142	
GAV-80143	
GAV-80144	•
GAV-80151	
GAV-80152	
GAV-80153	
GAV-80154	•
GAV-80161	
GAV-80162	
GAV-80163	
GAV-80164	•
GAV-80171	
GAV-80172	
GAV-80173	
GAV-80174	•
GAV-80211	
GAV-80212	
GAV-80221	
GAV-80222	
GAV-80231	
GAV-80232	
GAV-80241	
GAV-80242	
GAV-80251	
GAV-80252	
GAV-80261	
GAV-80262	
GAV-80271	
GAV-80272	
GAV-80421	
GAV-80422	
GAV-80423	
GAV-80424	•
GAV-80431	
GAV-80432	
GAV-80433	
GAV-80434	•
GAV-80441	
GAV-80442	
GAV-80443	
GAV-80444	•
GAV-80451	
GAV-80452	
GAV-80453	
GAV-80454	•
GAV-80461	
GAV-80462	
GAV-80463	
GAV-80464	•
GAV-80471	
GAV-80472	
GAV-80473	
GAV-80474	•
GAV-80521	
GAV-80522	
GAV-80531	
GAV-80532	
GAV-80541	

We reserve the right to make technical and design changes.

01:26, 01-05-2024

<https://www.ligman.com/gavle-surface-ceiling-luminaires-ga-cei3/>

THAILAND

LIGMAN Lighting Co.,Ltd.
17/2 Moo 4, Monthong, Bang Nam Prio,
24150 Chachoengsao - Thailand
info@ligman.com

GAVLE

- GAV-80542
- GAV-80551
- GAV-80552
- GAV-80561
- GAV-80562
- GAV-80571
- GAV-80572

GAV-80111, GAV-80112, GAV-80113, GAV-80114		GAV-80211, GAV-80212			
GAV-80121, GAV-80122, GAV-80123, GAV-80124		GAV-80221, GAV-80222		GAV-80421, GAV-80422, GAV-80423, GAV-80424	
GAV-80131, GAV-80132, GAV-80133, GAV-80134		GAV-80231, GAV-80232		GAV-80431, GAV-80432, GAV-80433, GAV-80434	
GAV-80141, GAV-80142, GAV-80143, GAV-80144		GAV-80241, GAV-80242		GAV-80441, GAV-80442, GAV-80443, GAV-80444	
GAV-80151, GAV-80152, GAV-80153, GAV-80154		GAV-80251, GAV-80252		GAV-80451, GAV-80452, GAV-80453, GAV-80454	
GAV-80161, GAV-80162, GAV-80163, GAV-80164		GAV-80261, GAV-80262		GAV-80461, GAV-80462, GAV-80463, GAV-80464	
GAV-80171, GAV-80172, GAV-80173, GAV-80174		GAV-80271, GAV-80272		GAV-80471, GAV-80472, GAV-80473, GAV-80474	
				GAV-80521, GAV-80522	
				GAV-80531, GAV-80532	
				GAV-80541, GAV-80542	
				GAV-80551, GAV-80552	
				GAV-80561, GAV-80562	
				GAV-80571, GAV-80572	

We reserve the right to make technical and design changes.

01:26, 01-05-2024

<https://www.ligman.com/gavle-surface-ceiling-luminaires-ga-ce>
i3/

THAILAND

LIGMAN Lighting Co.,Ltd.
17/2 Moo 4, Monthong, Bang Nam Prio,
24150 Chachoengsao - Thailand
info@ligman.com

GAVLE



GAVLE
Recessed ceiling luminaires

Comprehensive range of clean-edged interior circular ring fixtures. Powerful and technical performance options shrouded in a minimalist aesthetic form.

<https://www.ligman.com/gavle-recessed-ceiling-luminaires-ga-rec3/>



GAVLE
Pendant luminaires

Comprehensive range of clean-edged interior circular ring fixtures. Powerful and technical performance options shrouded in a minimalist aesthetic form.

<https://www.ligman.com/gavle-pendant-luminaires-ga-pen3/>