



VANCOUVER




Total urban realm lighting solution. Optional heights, accent projectors, accessories and decorative lattice panels.

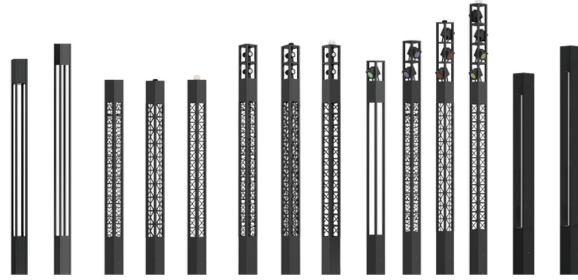


Luminaire Structure

- Die-cast aluminium housing
- Extruded aluminium column
- Pre-treated before powder coating ensuring high corrosion resistance
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Clear toughened glass
- High-efficiency optical reflector or high-efficiency polycarbonate lens
- Maximum wind load resistance is 160 km/h
- Surge protection 10kV
- VANCOUVER luminaires with projectors on top and colder than 3000K CCT do not meet the IDA certification requirements

Feature

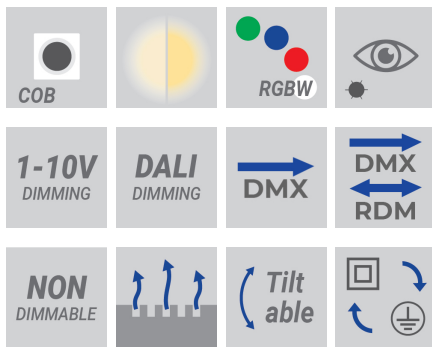


Optic

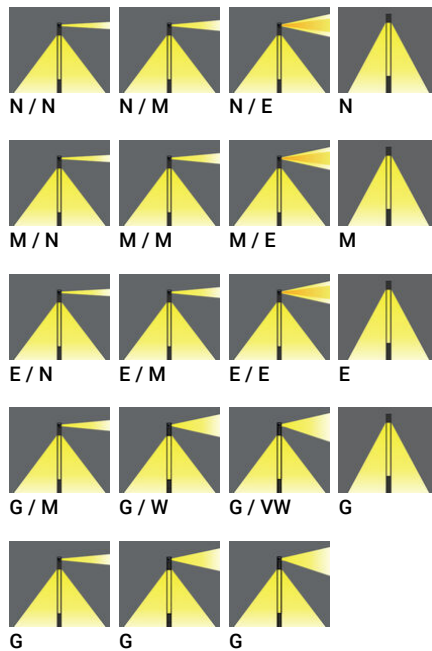

Product colour



Special finishes upon request

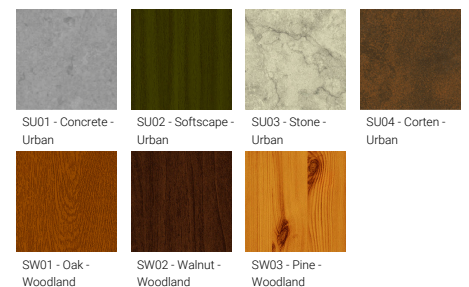

VANCOUVER

Technical information

	Model number	Light source	Power	Lumen	Optic	CCT / CRI	Dimming type	Weight	
160x160 mm - 3000 mm - No decorative pattern - IP65									
VANCOUVER 55	VA-20251	1 COB	21 W	675 - 710 lm	G [65°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	30.0 kg	
160x160 mm - 3000 mm - No decorative pattern - IP65									
VANCOUVER 2	VA-20011	1 COB	20 W	1397 - 1414 lm	G [65°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	25.0 kg	
VANCOUVER 41	VA-20191	1 COB	20 W	1233 - 1326 lm	G [143°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	25.0 kg	
240x240 mm - 3700 mm - Decorative pattern type 3 - IP65 - With opal lens									
VANCOUVER 62	VA-20283	12 x 32 LED	94 W	4864 - 5120 lm	G [360°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	59.8 kg	
240x240 mm - 3700 mm - Decorative pattern type 1 - IP65									
VANCOUVER 8	VA-20051	1 COB	40 W	1248 - 1336 lm	G [64°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	55.0 kg	
VANCOUVER 52	VA-20241	1 COB	40 W	2586 - 2781 lm	G [134°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	55.0 kg	
240x240 mm - 3700 mm - Decorative pattern type 1 - IP65 - With opal lens									
VANCOUVER 60	VA-20281	12 x 32 LED	94 W	4864 - 5120 lm	G [360°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	60.1 kg	
240x240 mm - 3700 mm - Decorative pattern type 1 - IP66 - RGBW									
VANCOUVER 21	VA-20161	7 LED	33 W	1119 - 1429 lm	N [21°], M [35°], E [48x26°]	RGBW30, RGBW40	DMX, DMX/RDM	55.0 kg	
240x240 mm - 3700 mm - Decorative pattern type 1 - LIGHTCONNECT™									
VANCOUVER 8	VA-20051-LC	1 COB	40 W	1248 - 1336 lm	G [64°]	3000K CRI80, 4000K CRI80	DALI	55.0 kg	
VANCOUVER 52	VA-20241-LC	1 COB	40 W	2586 - 2781 lm	G [134°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	55.0 kg	
240x240 mm - 3700 mm - Decorative pattern type 2 - IP65									
VANCOUVER 9	VA-20061	1 COB	40 W	1091 - 1167 lm	G [58°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	55.8 kg	
VANCOUVER 53	VA-20242	1 COB	40 W	2586 - 2781 lm	G [134°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	55.8 kg	
240x240 mm - 3700 mm - Decorative pattern type 2 - IP65 - With opal lens									
VANCOUVER 61	VA-20282	12 x 32 LED	94 W	4864 - 5120 lm	G [360°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	60.5 kg	
240x240 mm - 3700 mm - Decorative pattern type 2 - IP66 -RGBW									
VANCOUVER 22	VA-20171	7 LED	33 W	1119 - 1429 lm	N [21°], M [35°], E [48x26°]	RGBW30, RGBW40	DMX, DMX/RDM	55.8 kg	
240x240 mm - 3700 mm - Decorative pattern type 2 - LIGHTCONNECT™									
VANCOUVER 9	VA-20061-LC	1 COB	40 W	1091 - 1167 lm	G [58°]	3000K CRI80, 4000K CRI80	DALI	55.8 kg	
VANCOUVER 53	VA-20242-LC	1 COB	40 W	2586 - 2781 lm	G [134°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	55.8 kg	
240x240 mm - 3700 mm - Decorative pattern type 3 - IP65									
VANCOUVER 10	VA-20071	1 COB	40 W	1560 - 1670 lm	G [56°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	54.3 kg	
VANCOUVER 54	VA-20243	1 COB	40 W	2586 - 2781 lm	G [134°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	54.3 kg	

VANCOUVER

240x240 mm - 3700 mm - Decorative pattern type 3 - IP66 - RGBW									
VANCOUVER 23	VA-20181	7 LED	33 W	1119 - 1429 lm	N [21°], M [35°], E [48x26°]	RGBW30, RGBW40	DMX, DMX/RDM	54.3 kg	
240x240 mm - 3700 mm - No decorative pattern - IP66 - RGBW									
VANCOUVER 20	VA-20151	7 LED	33 W	1119 - 1429 lm	N [21°], M [35°], E [48x26°]	RGBW30, RGBW40	DMX, DMX/RDM	52.0 kg	
240x240 mm - 4070 mm - Decorative pattern type 1 (Optic) - 1 projector (Optic 2nd) - LIGHTCONNECT™									
VANCOUVER 5	VA-20021-LC	1 COB & 1 COB (Projector)	61 W	2901 - 3024 lm	G [64°]	3000K CRI80, 4000K CRI80	DALI	52.4 kg	
VANCOUVER 43	VA-20211-LC	1 COB & 1 COB (Projector)	61 W	4239 - 4469 lm	G [134°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	52.4 kg	
240x240 mm - 4070 mm - Decorative pattern type 1 (Optic) - 1 projector (Optic 2nd) IP65									
VANCOUVER 5	VA-20021	1 COB & 1 COB (Projector)	61 W	2901 - 3024 lm	G [64°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	52.4 kg	
VANCOUVER 43	VA-20211	1 COB & 1 COB (Projector)	61 W	4239 - 4469 lm	G [134°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	52.4 kg	
240x240 mm - 4070 mm - Decorative pattern type 1 (Optic) - 1 projector (Optic 2nd) IP66 - RGBW									
VANCOUVER 17	VA-20121	7 LED & 7 LED (Projector)	66 W	1642 - 2367 lm	N [21°], M [35°], E [48°x26°]	RGBW30, RGBW40	DMX, DMX/RDM	59.2 kg	
240x240 mm - 4070 mm - Decorative pattern type 2 (Optic) - 1 projector (Optic 2nd) - LIGHTCONNECT™									
VANCOUVER 6	VA-20031-LC	1 COB & 1 COB (Projector)	61 W	2744 - 2855 lm	G [58°]	3000K CRI80, 4000K CRI80	DALI	52.4 kg	
VANCOUVER 46	VA-20221-LC	1 COB & 1 COB (Projector)	61 W	4188 - 5892 lm	G [134°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	52.4 kg	
240x240 mm - 4070 mm - Decorative pattern type 2 (Optic) - 1 projector (Optic 2nd) IP65									
VANCOUVER 6	VA-20031	1 COB & 1 COB (Projector)	61 W	2744 - 2855 lm	G [58°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	52.4 kg	
VANCOUVER 46	VA-20221	1 COB & 1 COB (Projector)	61 W	4188 - 4484 lm	G [134°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	52.4 kg	
240x240 mm - 4070 mm - Decorative pattern type 2 (Optic) - 1 projector (Optic 2nd) IP66 - RGBW									
VANCOUVER 18	VA-20131	7 LED & 7 LED (Projector)	66 W	1615 - 2271 lm	N [21°], M [35°], E [48°x26°]	RGBW30, RGBW40	DMX, DMX/RDM	60.0 kg	
240x240 mm - 4070 mm - Decorative pattern type 3 (Optic) - 1 projector (Optic 2nd) - LIGHTCONNECT™									
VANCOUVER 7	VA-20041-LC	1 COB & 1 COB (Projector)	61 W	3213 - 3358 lm	G [56°]	3000K CRI80, 4000K CRI80	DALI	52.4 kg	
VANCOUVER 49	VA-20231-LC	1 COB & 1 COB (Projector)	61 W	4239 - 4469 lm	G [134°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	52.4 kg	
240x240 mm - 4070 mm - Decorative pattern type 3 (Optic) - 1 projector (Optic 2nd) IP65									
VANCOUVER 7	VA-20041	1 COB & 1 COB (Projector)	61 W	3213 - 3358 lm	G [56°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	52.4 kg	
VANCOUVER 49	VA-20231	1 COB & 1 COB (Projector)	61 W	4239 - 4469 lm	G [134°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	52.4 kg	
240x240 mm - 4070 mm - Decorative pattern type 3 (Optic) - 1 projector (Optic 2nd) IP66 - RGBW									
VANCOUVER 19	VA-20141	7 LED & 7 LED (Projector)	66 W	1738 - 2392 lm	N [18°], M [30°], E [34°x21°]	RGBW30, RGBW40	DMX, DMX/RDM	58.5 kg	

VANCOUVER

240x240 mm - 4070 mm - No decorative pattern (Optic) - 1 projector (Optic 2nd) IP66 - RGBW									
VANCOUVER 16	VA-20111	7 LED & 7 LED (Projector)	66 W	1968 - 2624 lm	N [21°, M [35°], E [48°x26°]	RGBW30, RGBW40	DMX, DMX/RDM	56.2 kg	
240x240 mm - 4400 mm - Decorative pattern type 1 (Optic) - 2 projectors (Optic 2nd) IP66 - RGBW									
VANCOUVER 17	VA-20122	7 LED & 2 x 7 LED (Projectors)	99 W	2716 - 3796 lm	N [21°, M [35°], E [48°x26°]	RGBW30, RGBW40	DMX, DMX/RDM	63.4 kg	
240x240 mm - 4400 mm - Decorative pattern type 2 (Optic) - 2 projectors (Optic 2nd) IP66 - RGBW									
VANCOUVER 18	VA-20132	7 LED & 2 x 7 LED (Projectors)	99 W	2689 - 3700 lm	N [21°, M [35°], E [48°x26°]	RGBW30, RGBW40	DMX, DMX/RDM	64.2 kg	
240x240 mm - 4400 mm - Decorative pattern type 3 (Optic) - 2 projectors (Optic 2nd) IP66 - RGBW									
VANCOUVER 19	VA-20142	7 LED & 2 x 7 LED (Projectors)	99 W	2812 - 3821 lm	N [18°, M [30°], E [34°x21°]	RGBW30, RGBW40	DMX, DMX/RDM	62.7 kg	
240x240 mm - 4400 mm - No decorative pattern (Optic) - 2 projectors (Optic 2nd) IP66 - RGBW									
VANCOUVER 16	VA-20112	7 LED & 2 x 7 LED (Projectors)	99 W	3042 - 4053 lm	N [21°, M [30°], E [48°x26°]	RGBW30, RGBW40	DMX, DMX/RDM	60.4 kg	
240x240 mm - 4440 mm - Decorative pattern type 1 (Optic) - 2 projectors (Optic 2nd) - LIGHTCONNECT™									
VANCOUVER 5	VA-20022-LC	1 COB & 2 x 1 COB (Projectors)	82 W	4554 - 4712 lm	G [64°]	3000K CRI80, 4000K CRI80	DALI	56.6 kg	
VANCOUVER 44	VA-20212-LC	1 COB & 2 x 1 COB (Projectors)	82 W	5892 - 6157 lm	G [134°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	56.6 kg	
240x240 mm - 4440 mm - Decorative pattern type 1 (Optic) - 2 projectors (Optic 2nd) IP65									
VANCOUVER 5	VA-20022	1 COB & 2 x 1 COB (Projectors)	82 W	4554 - 4712 lm	G [64°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	56.6 kg	
VANCOUVER 44	VA-20212	1 COB & 2 x 1 COB (Projectors)	82 W	5892 - 6157 lm	G [134°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	56.6 kg	
240x240 mm - 4440 mm - Decorative pattern type 2 (Optic) - 2 projectors (Optic 2nd) - LIGHTCONNECT™									
VANCOUVER 6	VA-20032-LC	1 COB & 2 x 1 COB (Projectors)	82 W	4397 - 4543 lm	G [58°]	3000K CRI80, 4000K CRI80	DALI	56.6 kg	
VANCOUVER 47	VA-20222-LC	1 COB & 2 x 1 COB (Projectors)	82 W	5892 - 6157 lm	G [134°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	56.6 kg	
240x240 mm - 4440 mm - Decorative pattern type 2 (Optic) - 2 projectors (Optic 2nd) IP65									
VANCOUVER 6	VA-20032	1 COB & 2 x 1 COB (Projectors)	82 W	4397 - 4543 lm	G [58°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	56.6 kg	
VANCOUVER 47	VA-20222	1 COB & 2 x 1 COB (Projectors)	82 W	5892 - 6157 lm	G [134°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	56.6 kg	
240x240 mm - 4440 mm - Decorative pattern type 3 (Optic) - 2 projectors (Optic 2nd) - LIGHTCONNECT™									
VANCOUVER 7	VA-20042-LC	1 COB & 2 x 1 COB (Projectors)	82 W	4866 - 5046 lm	G [56°]	3000K CRI80, 4000K CRI80	DALI	56.6 kg	

VANCOUVER

VANCOUVER 50	VA-20232-LC	1 COB & 2 x 1 COB (Projectors)	82 W	5892 - 6157 lm	G [134°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	56.6 kg	
240x240 mm - 4440 mm - Decorative pattern type 3 (Optic) - 2 projectors (Optic 2nd) IP65									
VANCOUVER 7	VA-20042	1 COB & 2 x 1 COB (Projectors)	82 W	4866 - 5046 lm	G [56°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	56.6 kg	
VANCOUVER 50	VA-20232	1 COB & 2 x 1 COB (Projectors)	82 W	5892 - 6157 lm	G [134°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	56.6 kg	
240x240 mm - 4500 mm - No decorative pattern - IP65									
VANCOUVER 1	VA-20001	1 COB	40 W	2775 - 2969 lm	G [65°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	55.0 kg	
VANCOUVER 42	VA-20201	1 COB	40 W	2775 - 2969 lm	G [134°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	55.0 kg	
VANCOUVER 56	VA-20261	1 COB	40 W	1410 - 1485 lm	G [65°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	65.5 kg	
240x240 mm - 4810 mm - Decorative pattern type 1 (Optic) - 3 projectors (Optic 2nd) - LIGHTCONNECT™									
VANCOUVER 5	VA-20023-LC	1 COB & 3 x 1 COB (Projectors)	103 W	6207 - 6400 lm	G [64°]	3000K CRI80, 4000K CRI80	DALI	60.8 kg	
VANCOUVER 45	VA-20213-LC	1 COB & 3 x 1 COB (Projectors)	103 W	7545 - 7845 lm	G [134°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	60.8 kg	
240x240 mm - 4810 mm - Decorative pattern type 1 (Optic) - 3 projectors (Optic 2nd) IP65									
VANCOUVER 5	VA-20023	1 COB & 3 x 1 COB (Projectors)	103 W	6207 - 6400 lm	G [64°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	60.8 kg	
VANCOUVER 45	VA-20213	1 COB & 3 x 1 COB (Projectors)	103 W	7545 - 7845 lm	G [134°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	60.8 kg	
240x240 mm - 4810 mm - Decorative pattern type 1 (Optic) - 3 projectors (Optic 2nd) IP66 - RGBW									
VANCOUVER 17	VA-20123	7 LED & 3 x 7 LED (Projectors)	132 W	3790 - 5225 lm	N [21°, M [35°], E [48°x26°]	RGBW30, RGBW40	DMX, DMX/RDM	67.6 kg	
240x240 mm - 4810 mm - Decorative pattern type 2 (Optic) - 3 projectors (Optic 2nd) - LIGHTCONNECT™									
VANCOUVER 6	VA-20033-LC	1 COB & 3 x 1 COB (Projectors)	103 W	6050 - 6231 lm	G [58°]	3000K CRI80, 4000K CRI80	DALI	60.8 kg	
VANCOUVER 48	VA-20223-LC	1 COB & 3 x 1 COB (Projectors)	103 W	7545 - 7845 lm	G [134°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	60.8 kg	
240x240 mm - 4810 mm - Decorative pattern type 2 (Optic) - 3 projectors (Optic 2nd) IP65									
VANCOUVER 6	VA-20033	1 COB & 3 x 1 COB (Projectors)	103 W	6050 - 6231 lm	G [58°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	60.8 kg	
VANCOUVER 48	VA-20223	1 COB & 3 x 1 COB (Projectors)	103 W	7545 - 7845 lm	G [134°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	60.8 kg	
240x240 mm - 4810 mm - Decorative pattern type 2 (Optic) - 3 projectors (Optic 2nd) IP66 - RGBW									
VANCOUVER 18	VA-20133	7 LED & 3 x 7 LED (Projectors)	132 W	3763 - 5129 lm	N [21°, M [35°], E [48°x26°]	RGBW30, RGBW40	DMX, DMX/RDM	68.4 kg	
240x240 mm - 4810 mm - Decorative pattern type 3 (Optic) - 3 projectors (Optic 2nd) - LIGHTCONNECT™									
VANCOUVER 7	VA-20043-LC	1 COB & 3 x 1 COB (Projectors)	103 W	6519 - 6734 lm	G [56°]	3000K CRI80, 4000K CRI80	DALI	60.8 kg	

VANCOUVER

VANCOUVER 51	VA-20233-LC	1 COB & 3 x 1 COB (Projectors)	103 W	7545 - 7845 lm	G [134°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	54.3 kg	
240x240 mm - 4810 mm - Decorative pattern type 3 (Optic) - 3 projectors (Optic 2nd) IP65									
VANCOUVER 7	VA-20043	1 COB & 3 x 1 COB (Projectors)	103 W	6519 - 6734 lm	G [56°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	60.8 kg	
VANCOUVER 51	VA-20233	1 COB & 2 x 1 COB (Projectors)	103 W	7545 - 7845 lm	G [134°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	60.8 kg	
240x240 mm - 4810 mm - Decorative pattern type 3 (Optic) - 3 projectors (Optic 2nd) IP66 - RGBW									
VANCOUVER 19	VA-20143	7 LED & 3 x 7 LED (Projectors)	132 W	3886 - 5250 lm	N [18°], M [30°], E [34°x21°]	RGBW30, RGBW40	DMX, DMX/RDM	66.9 kg	
240x240 mm - 4810 mm - No decorative pattern (Optic) - 3 projectors (Optic 2nd) IP66 - RGBW									
VANCOUVER 16	VA-20113	7 LED & 3 x 7 LED (Projectors)	132 W	4116 - 5482 lm	N [21°], M [35°], E [48°x26°]	RGBW30, RGBW40	DMX, DMX/RDM	64.6 kg	
240x240 mm - 5180 mm - Decorative pattern type 1 (Optic) - 4 projectors (Optic 2nd) IP66 - RGBW									
VANCOUVER 17	VA-20124	7 LED & 4 x 7 LED (Projectors)	165 W	4864 - 6654 lm	N [21°], M [35°], E [48°x26°]	RGBW30, RGBW40	DMX, DMX/RDM	71.8 kg	
240x240 mm - 5180 mm - Decorative pattern type 2 (Optic) - 4 projectors (Optic 2nd) IP66 - RGBW									
VANCOUVER 18	VA-20134	7 LED & 4 x 7 LED (Projectors)	165 W	4837 - 6558 lm	N [21°], M [35°], E [48°x26°]	RGBW30, RGBW40	DMX, DMX/RDM	72.6 kg	
240x240 mm - 5180 mm - Decorative pattern type 3 (Optic) - 4 projectors (Optic 2nd) IP66 - RGBW									
VANCOUVER 19	VA-20144	7 LED & 4 x 7 LED (Projectors)	165 W	4960 - 6679 lm	N [18°], M [30°], E [34°x21°]	RGBW30, RGBW40	DMX, DMX/RDM	71.1 kg	
240x240 mm - 5180 mm - No decorative pattern (Optic) - 4 projectors (Optic 2nd) IP66 - RGBW									
VANCOUVER 16	VA-20114	7 LED & 4 x 7 LED (Projectors)	165 W	5190 - 6911 lm	N [21°], M [35°], E [48°x26°]	RGBW30, RGBW40	DMX, DMX/RDM	68.8 kg	
3700 mm - Decorative pattern type 3 - LIGHTCONNECT™									
VANCOUVER 10	VA-20071-LC	1 COB	40 W	1560 - 1670 lm	G [56°]	3000K CRI80, 4000K CRI80	DALI	54.3 kg	
VANCOUVER 54	VA-20243-LC	1 COB	40 W	2586 - 2781 lm	G [134°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	54.3 kg	
4500 mm - No decorative pattern - LIGHTCONNECT™									
VANCOUVER 1	VA-20001-LC	1 COB	40 W	2775 - 2969 lm	G [65°]	3000K CRI80, 4000K CRI80	DALI	55.0 kg	
VANCOUVER 42	VA-20201-LC	1 COB	40 W	2775 - 2969 lm	G [134°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	55.0 kg	

Accessory








We reserve the right to make technical and design changes.

07:14, 02-04-2026

<https://www.ligman.com/vancouver-light-columns-va-li3/>

THAILAND
LIGMAN Lighting Co.,Ltd.
17/2 Moo 4, Monthong, Bang Nam Prio, 24150 Chachoengsao - Thailand
info@ligman.com

VANCOUVER

	 Root mount kit A20991	 Circuit breaker box IP44 A21291	 Root mount kit A21391	 NEMA 7 socket A90891	 Zhaga Book 18 socket (Up) A90991-U	 Smart Pole Accessories Accs-Smart-Pole	 DALI Control System Control-DALI
VA-20001		•	•				•
VA-20001-LC				•	•	•	•
VA-20011	•	•					•
VA-20021		•	•				•
VA-20021-LC				•	•	•	•
VA-20022		•	•				•
VA-20022-LC				•	•	•	•
VA-20023		•	•				•
VA-20023-LC				•	•	•	•
VA-20031		•	•				•
VA-20031-LC				•	•	•	•
VA-20032		•	•				•
VA-20032-LC				•	•	•	•
VA-20033		•	•				•
VA-20033-LC				•	•	•	•
VA-20041		•	•				•
VA-20041-LC		•	•	•	•	•	•
VA-20042		•	•				•
VA-20042-LC				•	•	•	•
VA-20043		•	•				•
VA-20043-LC				•	•	•	•
VA-20051		•	•				•
VA-20051-LC				•	•	•	•
VA-20061		•	•				•
VA-20061-LC				•	•	•	•
VA-20071		•	•				•
VA-20071-LC				•	•	•	•
VA-20111		•	•				•
VA-20112		•	•				•
VA-20113		•	•				•
VA-20114		•	•				•
VA-20121		•	•				•
VA-20122		•	•				•
VA-20123		•	•				•
VA-20124		•	•				•
VA-20131		•	•				•
VA-20132		•	•				•
VA-20133		•	•				•
VA-20134		•	•				•
VA-20141		•	•				•
VA-20142		•	•				•
VA-20143		•	•				•
VA-20144		•	•				•
VA-20151		•	•				•
VA-20161		•	•				•
VA-20171		•	•				•
VA-20181		•	•				•
VA-20191	•	•					•
VA-20201		•	•				•
VA-20201-LC				•	•	•	•
VA-20211		•	•				•
VA-20211-LC				•	•	•	•
VA-20212		•	•				•
VA-20212-LC				•	•	•	•
VA-20213		•	•				•
VA-20213-LC				•	•	•	•
VA-20221		•	•				•
VA-20221-LC				•	•	•	•
VA-20222		•	•				•

VANCOUVER

VA-20222-LC							
VA-20223							
VA-20223-LC							
VA-20231							
VA-20231-LC							
VA-20232							
VA-20232-LC							
VA-20233							
VA-20233-LC							
VA-20241							
VA-20241-LC							
VA-20242							
VA-20242-LC							
VA-20243							
VA-20243-LC							
VA-20251							
VA-20261							
VA-20281							
VA-20282							
VA-20283							



VA-20001		
VA-20001-LC		
VA-20011		
VA-20021		
VA-20021-LC		
VA-20022		
VA-20022-LC		
VA-20023		
VA-20023-LC		
VA-20031		
VA-20031-LC		
VA-20032		
VA-20032-LC		
VA-20033		
VA-20033-LC		
VA-20041		
VA-20041-LC		
VA-20042		
VA-20042-LC		
VA-20043		
VA-20043-LC		
VA-20051		
VA-20051-LC		
VA-20061		
VA-20061-LC		
VA-20071		
VA-20071-LC		
VA-20111		
VA-20112		
VA-20113		
VA-20114		
VA-20121		
VA-20122		
VA-20123		
VA-20124		
VA-20131		

We reserve the right to make technical and design changes.

07:14, 02-04-2026


<https://www.ligman.com/vancouver-light-columns-va-li3/>

THAILAND
 LIGMAN Lighting Co.,Ltd.
 17/2 Moo 4, Monthong, Bang Nam Prio, 24150 Chachoengsao - Thailand
info@ligman.com




VANCOUVER


VA-20132	•	•
VA-20133	•	•
VA-20134	•	•
VA-20141	•	•
VA-20142	•	•
VA-20143	•	•
VA-20144	•	•
VA-20151	•	•
VA-20161	•	•
VA-20171	•	•
VA-20181	•	•
VA-20191		
VA-20201		
VA-20201-LC		
VA-20211		
VA-20211-LC		
VA-20212		
VA-20212-LC		
VA-20213		
VA-20213-LC		
VA-20221		
VA-20221-LC		
VA-20222		
VA-20222-LC		
VA-20223		
VA-20223-LC		
VA-20231		
VA-20231-LC		
VA-20232		
VA-20232-LC		
VA-20233		
VA-20233-LC		
VA-20241		
VA-20241-LC		
VA-20242		
VA-20242-LC		
VA-20243		
VA-20243-LC		
VA-20251		
VA-20261		
VA-20281		
VA-20282		
VA-20283		

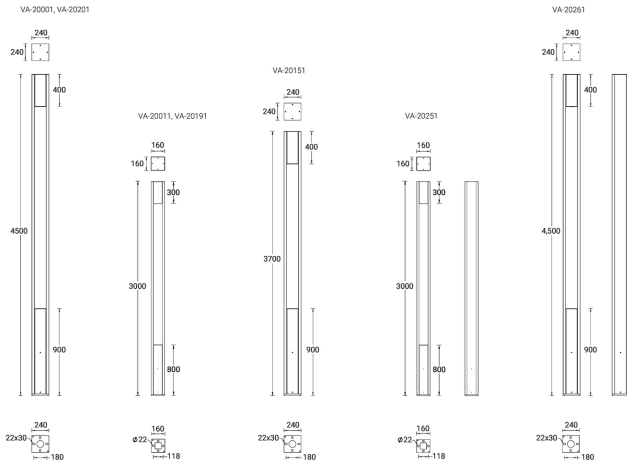


VA-20111, VA-20112
VA-20113, VA-20114

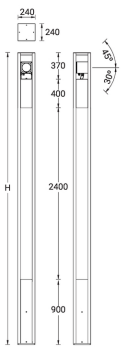



VA-20121, VA-20122
VA-20123, VA-20124



VA-20131, VA-20132
VA-20133, VA-20134



VA-20141, VA-20142
VA-20143, VA-20144

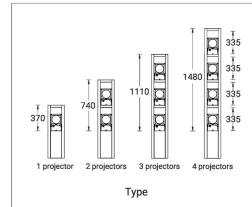


Product code	Type	Height (H)
VA-20111	1 projector	4,070
VA-20112	2 projectors	4,440
VA-20113	3 projectors	4,810
VA-20114	4 projectors	5,180

Product code	Type	Height (H)
VA-20121	1 projector	4,070
VA-20122	2 projectors	4,440
VA-20123	3 projectors	4,810
VA-20124	4 projectors	5,180


Product code	Type	Height (H)
VA-20131	1 projector	4,070
VA-20132	2 projectors	4,440
VA-20133	3 projectors	4,810
VA-20134	4 projectors	5,180

Product code	Type	Height (H)
VA-20141	1 projector	4,070
VA-20142	2 projectors	4,440
VA-20143	3 projectors	4,810
VA-20144	4 projectors	5,180



VA-20021, VA-20022
VA-20023, VA-20021
VA-20212, VA-20213




VA-20031, VA-20032
VA-20033, VA-20021
VA-20222, VA-20223




VA-20041, VA-20042
VA-20043, VA-20021
VA-20222, VA-20223




VA-20051, VA-20161
VA-20041, VA-20281



VA-20081, VA-20171
VA-20242, VA-20282

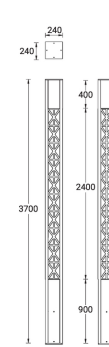

VA-20071, VA-20181
VA-20243, VA-20283



Product code	Type	Height (H)
VA-20021	1 projector	4,070
VA-20022	2 projectors	4,440
VA-20023	3 projectors	4,810

Product code	Type	Height (H)
VA-20031	1 projector	4,070
VA-20032	2 projectors	4,440
VA-20033	3 projectors	4,810

Product code	Type	Height (H)
VA-20041	1 projector	4,070
VA-20042	2 projectors	4,440
VA-20043	3 projectors	4,810

VANCOUVER



VANCOUVER
Bollards

Contemporary urban lighting furniture. Open-sided, three lattice pattern options or your bespoke design.


<https://www.ligman.com/vancouver-bollards-va-bo3/>



VANCOUVER
Pillar luminaires

Compact decorative landscape way-finding. Minimalist solutions delivering a play of illuminate patterns.

<https://www.ligman.com/vancouver-pillar-luminaires-va-bo3/>

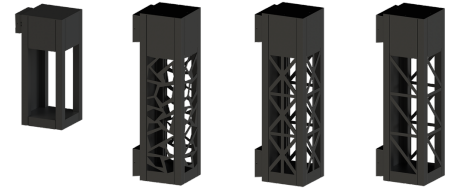

VANCOUVER
Surface facade luminaires

Contemporary urban lighting furniture. Open-sided, three lattice pattern options or your bespoke design.

<https://www.ligman.com/vancouver-surface-facade-luminaires-va-su3/>