


GANDALF




Surface-mounted cost-effective adjustable flood and area lighting. New higher lumen packages and extended family with a vast array of flexible performance choices.

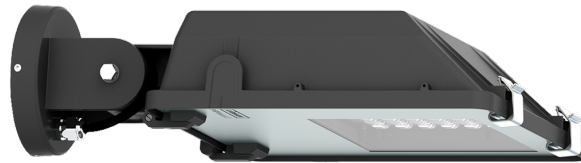


Luminaire Structure

- Die-cast aluminium housing
- Pre-treated before powder coating ensuring high corrosion resistance
- Two cable entries for through wiring
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Clear toughened glass
- Integral control gear


Feature

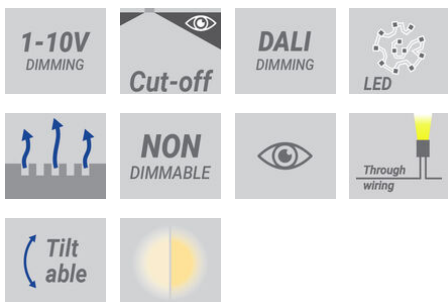


Optic

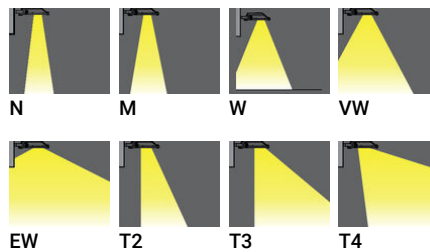

Product colour

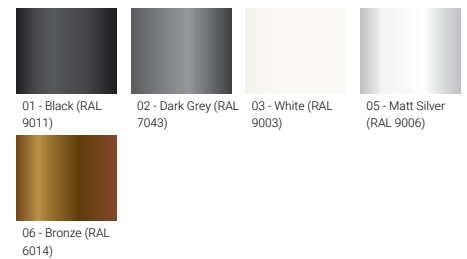



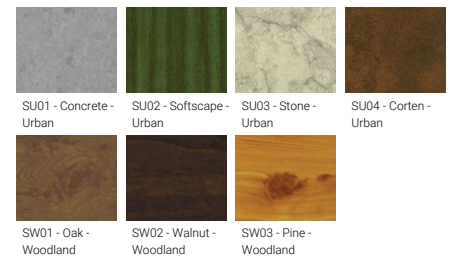


Special finishes upon request




GANDALF

Technical information



	Model number	Light source	Power	Lumen	Optic	CCT / CRI	Dimming type	Weight	
GANDALF 22	GA-31911	24 LED	37 W	3879 - 5207 lm	N [12°], M [30°], W [52°], VW [64°], EW [108°], T2 [140°x32°], T3 [143°x63°], T4 [100°x81°], ME [147°x42°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	8.5 kg	
GANDALF 22	GA-31912	24 LED	54 W	5777 - 6666 lm	M [30°], W [52°], EW [108°], T2 [143°x47°], T3 [140°x70°], T4 [100°x81°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	8.5 kg	
GANDALF 22	GA-31913	48 LED	54 W	4991 - 6736 lm	N [11°], M [26°], W [52°], VW [66°], EW [101°x114°], T2 [140°x47°], T3 [138°x64°], T4 [99°x77°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	9.5 kg	
GANDALF 22	GA-31914	48 LED	74 W	6559 - 8845 lm	N [11°], M [26°], W [52°], VW [66°], EW [101°x114°], T2 [140°x47°], T3 [138°x64°], T4 [99°x77°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	9.5 kg	
GANDALF 22	GA-31915	48 LED	89 W	7715 - 11717 lm	N [11°], M [30°], W [57°], VW [64°], EW [108°], T2 [138°x32°], T3 [140°x63°], T4 [128°x56°], ME [143°x42°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	9.5 kg	

Accessories



	 DALI Control System Control-DALI
GA-31911	•
GA-31912	•
GA-31913	•
GA-31914	•
GA-31915	•


GANDALF**GANDALF 22**

GA-31911, GA-31912

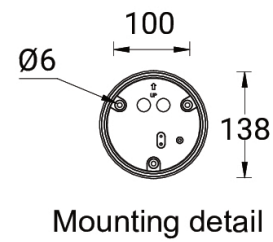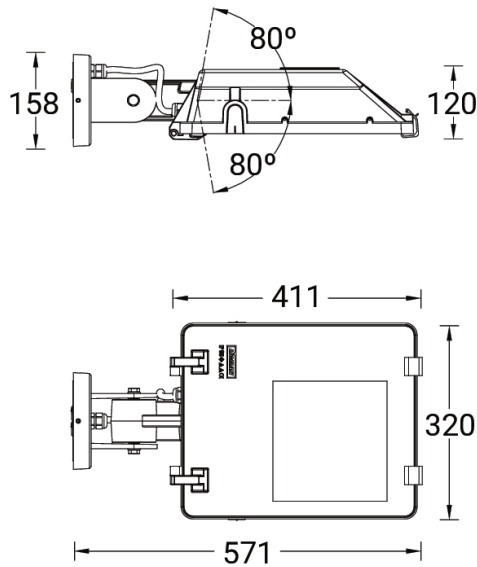**GANDALF 22**

GA-31913, GA-31914, GA-31915

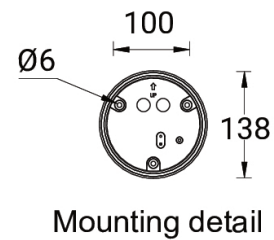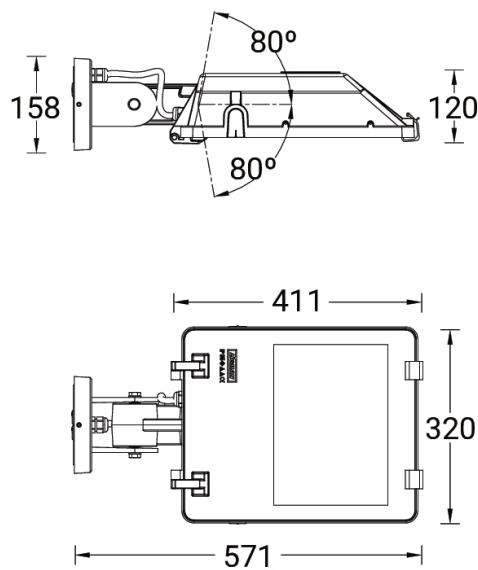

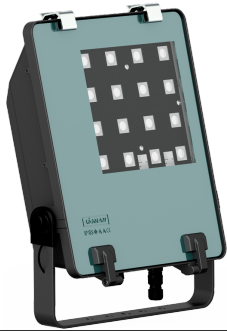GANDALF

GANDALF
Floodlights, projectors

Surface-mounted cost-effective adjustable flood and area lighting. New higher lumen packages and extended family with vast array of flexible performance choices.

<https://www.ligman.com/gandalf-floodlights-projectors-ga-pr3/>



GANDALF
Street & area lighting luminaires

Adjustable column-mounted area floodlight. Powerful, flexible and cost-effective family with a vast array of technical optic choices.

<https://www.ligman.com/gandalf-street-area-lighting-luminaires-ga-st3/>