


JANET




Compact and economic underwater fixture range. Competitive and flexible quality recessed fixtures with multiple beam angles.




Luminaire Structure

- Stainless steel body in grade 316
- Single cable entry
- Stainless steel fasteners in grade 316
- Durable silicone rubber gasket
- Clear toughened glass
- Remote driver is included for constant current (CC) products and is not IP-rated
- Remote driver is not included for constant voltage (CV) products
- Remote box IP-rated is not included and is to be ordered separately for constant current (CC) products
- Recessing box in stainless steel 316 grade
- Luminaire must be submerged when operational
- Maximum depth 2 m
- Outdoor cable needs to be ordered with a specific length

Feature

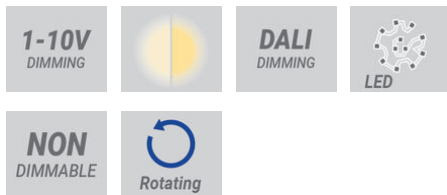

Optic

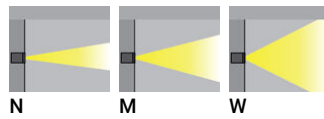

Product colour












JANET

Technical information

	Model number	Light source	Power	Lumen	Optic	CCT / CRI	Dimming type	Weight
Without remote box IP-rated - With remote driver / recessing box - Constant current (CC) 700 mA								
JANET 1	JA-60067	3 LED	8 W	506 - 779 lm	N [28°], M [32°], W [51°]	2700K CRI80, 3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	1.6 kg
JANET 2	JA-60811	5 LED	11 W	1240 - 1726 lm	N [23°], M [34°], W [42°]	2700K CRI80, 3000K CRI80, 4000K CRI80	On/Off, 1-10V	1.6 kg
Without remote driver - With recessing box - Constant voltage (CV) 24 V								
JANET 3	JA-60821	3 LED	7 W	617 - 765 lm	N [23°], M [31°], W [51°]	3000K CRI80, 4000K CRI80	On/Off	1.6 kg
JANET 3	JA-60822	5 LED	11 W	1057 - 1290 lm	N [22°], M [30°], W [48°]	3000K CRI80, 4000K CRI80	On/Off	1.6 kg

Accessories

	 Driver (CV) - On/Off - 36 W - IP67 - 24 V A34491-ND	 Driver (CV) - On/Off - 60 W - IP67 - 24 V A34591-ND	 Driver (CV) - On/Off - 100 W - IP67 - 24 V A34791-ND	 Driver (CV) - On/Off - 150 W - IP67 - 24 V A34891-ND	 Driver (CV) - On/Off - 200 W - IP67 - 24 V A34991-ND	 Driver (CV) - On/Off - 350 W - IP67 - 24 V A35091-ND	 Remote box IP65 A80191
JA-60067							.
JA-60811							.
JA-60821
JA-60822

	 Remote box IP65 A80291	 DALI Control System Control-DALI
JA-60067		.
JA-60811	.	.
JA-60821		
JA-60822		

JANET

JA-60067, JA-60811,
JA-60821, JA-60822

