

# LIGHT LINEAR DENVER




Public realm contemporary column family. Exclusive and charismatic column-mounting system offering infinite opportunities and different permutations.




## Luminaire Structure

- Die-cast aluminium housing
- Extruded aluminium column
- Pre-treated before powder coating ensuring high corrosion resistance
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Clear toughened glass
- Maximum wind load resistance is 100 km/h
- Surge protection 10kV


## Feature

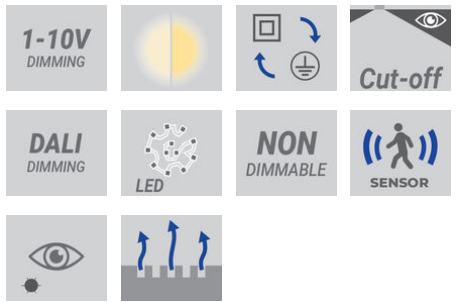


## Optic



## Product colour

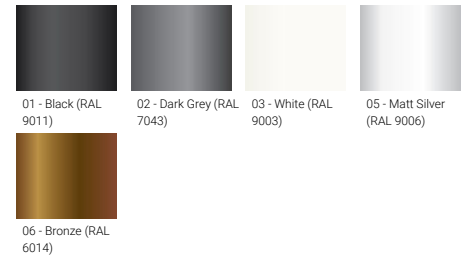

## Special finishes upon request

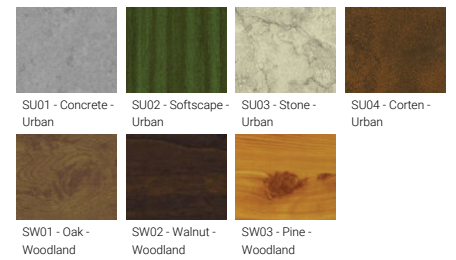

# LIGHT LINEAR DENVER

## Technical information

	Model number	Light source	Power	Lumen	Optic	CCT / CRI	Dimming type	Weight	
<b>1 side - Supplied with specific 4 m cylindrical, straight aluminium pole: APD140114-DE1</b>									
LIGHT LINEAR DENVER 1	DE-20001	24 LED	54 W	5501 - 6193 lm	T2 [140°x47°], T3 [134°x68°], T4 [92°x78°], ME [128°x57°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	25.0 kg	
LIGHT LINEAR DENVER 1	DE-20002	24 LED	82 W	7464 - 8448 lm	T2 [139°x53°], T3 [132°x70°], T4 [91°x75°], ME [127°x57°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	25.0 kg	
LIGHT LINEAR DENVER 1	DE-20003	48 LED	105 W	10921 - 12518 lm	T2 [139°x47°], T3 [132°x68°], T4 [98°x73°], ME [133°x59°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	27.0 kg	
LIGHT LINEAR DENVER 1	DE-20004	48 LED	155 W	14849 - 16891 lm	T2 [139°x53°], T3 [132°x70°], T4 [91°x75°], ME [133°x59°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	27.0 kg	
<b>2 sides - Supplied with specific 4 m cylindrical, straight aluminium pole: APD240114-DE2</b>									
LIGHT LINEAR DENVER 2	DE-20011	2 x 24 LED	108 W	11002 - 12386 lm	T2 [140°x47°], T3 [134°x68°], T4 [92°x78°], ME [127°x56°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	31.3 kg	
LIGHT LINEAR DENVER 2	DE-20012	2 x 24 LED	164 W	14928 - 16896 lm	T2 [139°x53°], T3 [132°x70°], T4 [91°x75°], ME [127°x56°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	31.3 kg	
LIGHT LINEAR DENVER 2	DE-20013	2 x 48 LED	210 W	21842 - 25036 lm	T2 [139°x47°], T3 [132°x68°], T4 [98°x73°], ME [127°x56°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	35.3 kg	
LIGHT LINEAR DENVER 2	DE-20014	2 x 48 LED	310 W	29698 - 33782 lm	T2 [139°x53°], T3 [132°x70°], T4 [91°x75°], ME [133°x59°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	35.3 kg	
<b>2 sides with step - Supplied with specific 4 m cylindrical, straight aluminium pole: APD240114-DE3</b>									
LIGHT LINEAR DENVER 3	DE-20021	2 x 24 LED	108 W	11002 - 12386 lm	T2 [140°x47°], T3 [134°x68°], T4 [92°x78°], ME [127°x56°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	33.5 kg	
LIGHT LINEAR DENVER 3	DE-20022	2 x 24 LED	164 W	14928 - 16896 lm	T2 [139°x53°], T3 [132°x70°], T4 [91°x75°], ME [128°x57°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	33.5 kg	
LIGHT LINEAR DENVER 3	DE-20023	2 x 48 LED	210 W	21842 - 25036 lm	T2 [139°x47°], T3 [132°x68°], T4 [98°x73°], ME [134°x59°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	37.5 kg	
LIGHT LINEAR DENVER 3	DE-20024	2 x 48 LED	310 W	29698 - 33782 lm	T2 [139°x53°], T3 [132°x70°], T4 [91°x75°], ME [133°x59°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	37.5 kg	
<b>3 sides with step - Supplied with specific 4 m cylindrical, straight aluminium pole: APD340114-DE4</b>									
LIGHT LINEAR DENVER 4	DE-20031	3 x 24 LED	162 W	16503 - 18579 lm	T2 [140°x47°], T3 [134°x68°], T4 [92°x78°], ME [127°x56°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	42.0 kg	
LIGHT LINEAR DENVER 4	DE-20032	3 x 24 LED	246 W	22392 - 25344 lm	T2 [139°x53°], T3 [132°x70°], T4 [91°x75°], ME [127°x56°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	42.0 kg	

We reserve the right to make technical and design changes.

01:31, 28-04-2024

<https://www.ligman.com/light-linear-denver-street-area-lighting-luminaires-li-st3/>

### THAILAND

LIGMAN Lighting Co.,Ltd.  
17/2 Moo 4, Monthong, Bang Nam Prio,  
24150 Chachoengsao - Thailand  
[info@ligman.com](mailto:info@ligman.com)

# LIGHT LINEAR DENVER

LIGHT LINEAR DENVER 4	<b>DE-20033</b>	3 x 48 LED	315 W	32763 - 37554 lm	T2 [139°x47°], T3 [132°x68°], T4 [98°x73°], ME [134°x59°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	48.0 kg	
LIGHT LINEAR DENVER 4	<b>DE-20034</b>	3 x 48 LED	465 W	44547 - 50673 lm	T2 [139°x53°], T3 [132°x70°], T4 [91°x75°], ME [133°x59°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	48.0 kg	

## Accessories

	 Root mount kit <b>A20491</b>	 Circuit breaker box IP44 <b>A21291</b>	 Motion sensor - PIR - 1-10V - Up to 3 m <b>A90191-L2</b>	 Motion sensor - PIR - 1-10V - Up to 6 m <b>A90191-L3</b>	 Motion sensor - PIR - 1-10V - Up to 12 m <b>A90191-L7</b>	 Remote controller for the motion sensor - 1-10V (A90191) <b>A90791</b>	 4 m - Cylindrical, straight aluminium pole for LIGHT LINEAR DENVER <b>APD140114-DE1</b>
DE-20001	•	•	•	•	•	•	•
DE-20002	•	•	•	•	•	•	•
DE-20003	•	•	•	•	•	•	•
DE-20004	•	•	•	•	•	•	•
DE-20011	•	•	•	•	•	•	•
DE-20012	•	•	•	•	•	•	•
DE-20013	•	•	•	•	•	•	•
DE-20014	•	•	•	•	•	•	•
DE-20021	•	•	•	•	•	•	•
DE-20022	•	•	•	•	•	•	•
DE-20023	•	•	•	•	•	•	•
DE-20024	•	•	•	•	•	•	•
DE-20031	•	•	•	•	•	•	•
DE-20032	•	•	•	•	•	•	•
DE-20033	•	•	•	•	•	•	•
DE-20034	•	•	•	•	•	•	•

	 4 m - Cylindrical, straight aluminium pole for LIGHT LINEAR DENVER <b>APD240114-DE2</b>	 4 m - Cylindrical, straight aluminium pole for LIGHT LINEAR DENVER <b>APD240114-DE3</b>	 4 m - Cylindrical, straight aluminium pole for LIGHT LINEAR DENVER <b>APD340114-DE4</b>	 DALI Control System <b>Control-DALI</b>
DE-20001				•
DE-20002				•
DE-20003				•
DE-20004				•
DE-20011	•			•
DE-20012	•			•
DE-20013	•			•
DE-20014	•			•
DE-20021		•		•
DE-20022		•		•
DE-20023		•		•
DE-20024		•		•
DE-20031			•	•
DE-20032			•	•
DE-20033			•	•
DE-20034			•	•

We reserve the right to make technical and design changes.


01:31, 28-04-2024

<https://www.ligman.com/light-linear-denver-street-area-lighting-luminaires-li-st3/>

**THAILAND**

LIGMAN Lighting Co.,Ltd.  
17/2 Moo 4, Monthong, Bang Nam Prioa,  
24150 Chachoengsao - Thailand  
[info@ligman.com](mailto:info@ligman.com)

# LIGHT LINEAR DENVER

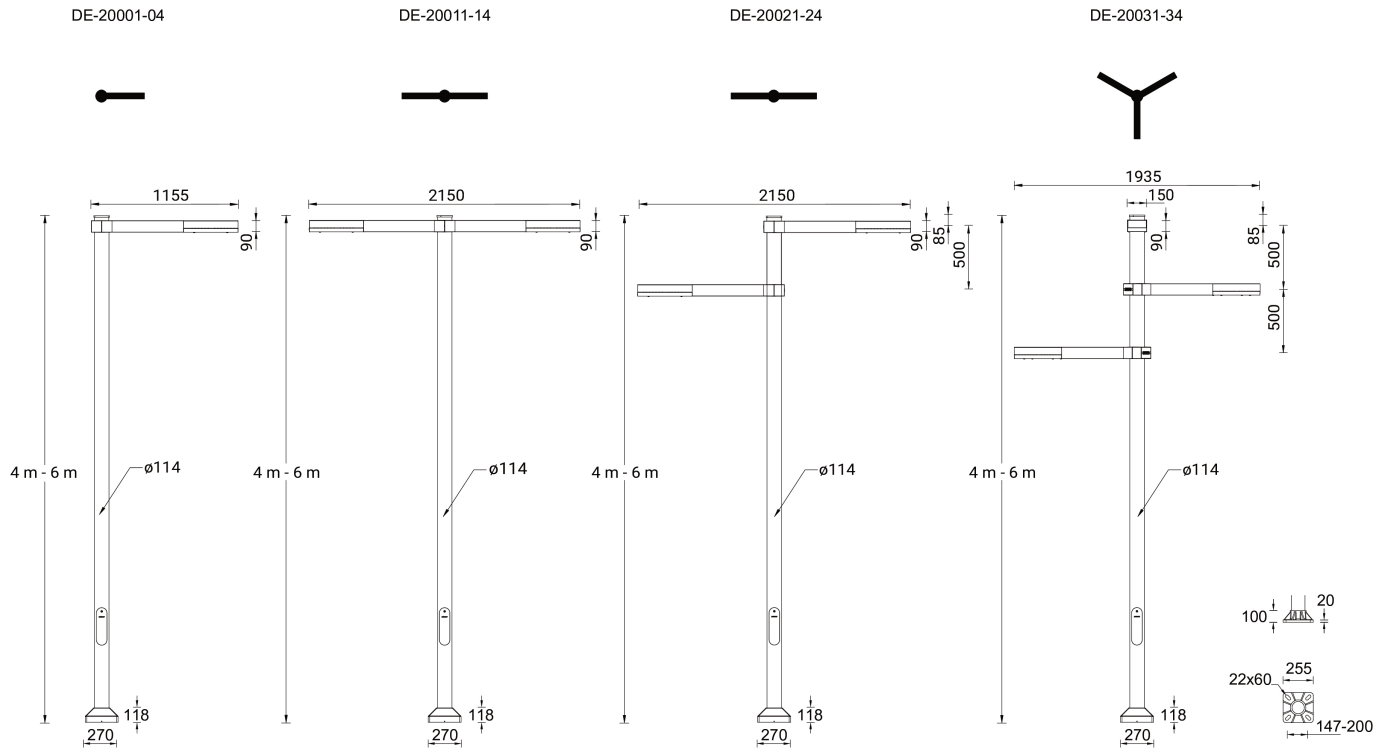

We reserve the right to make technical and design changes.

01:31, 28-04-2024

<https://www.ligman.com/light-linear-denver-street-area-lighting-luminaires-li-st3/>

**THAILAND**

LIGMAN Lighting Co.,Ltd.  
 17/2 Moo 4, Monthong, Bang Nam Prio,  
 24150 Chachoengsao - Thailand  
[info@ligman.com](mailto:info@ligman.com)