



OREGON




Miniature contemporary underwater recessed luminaires. Beautifully engineered minimalistic.




Luminaire Structure

- Stainless steel body in grade 316
- Single cable entry
- Stainless steel fasteners in grade 316
- Durable silicone rubber gasket
- Clear toughened glass
- Remote driver is included for constant current (CC) products and is not IP-rated
- Remote box IP-rated is not included and is to be ordered separately for constant current (CC) products
- Recessing box in high-density polyethylene is included
- Luminaire must be submerged when operational
- Maximum depth 1 m
- Outdoor cable needs to be ordered with a specific length

Feature

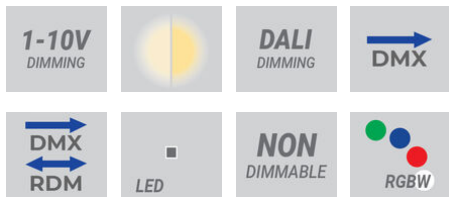

Optic



Product colour










OREGON




Technical information

	Model number	Light source	Power	Lumen	Optic	CCT / CRI	Dimming type	Weight
Without remote box IP-rated - With remote driver / recessing box - Constant current (CC) 500 mA								
OREGON 1	OR-60895	1 LED	2 W	191 - 201 lm	N [22°]	2700K CRI80, 3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	0.6 kg
Without remote driver - With recessing box - Constant voltage (CV) 24 V								
OREGON 1	OR-60894	1 LED	2 W	191 - 201 lm	N [22°]	3000K CRI80, 4000K CRI80	On/Off	0.6 kg
Without remote driver - With recessing box - Constant voltage (CV) 24 V - RGBW								
OREGON 1	OR-60896	1 LED	5 W	224 lm	M [33°]	RGBW30, RGBW40	DMX, DMX/RDM	0.6 kg



Accessories

							
	A34491-ND	A34591-ND	A34791-ND	A34891-ND	A34991-ND	A35091-ND	A80191
OR-60894
OR-60895
OR-60896

			
	Control-DALI	Control-DMX	Control-DMX-RDM
OR-60894	.	.	.
OR-60895	.	.	.
OR-60896	.	.	.

OREGON

OR-60894, OR-60895, OR-60896

