


# PITTSFIELD



Linear suspended, recessed and surface ambient lighting. Expansive and elegant portfolio of rectilinear workplace lighting fixtures.

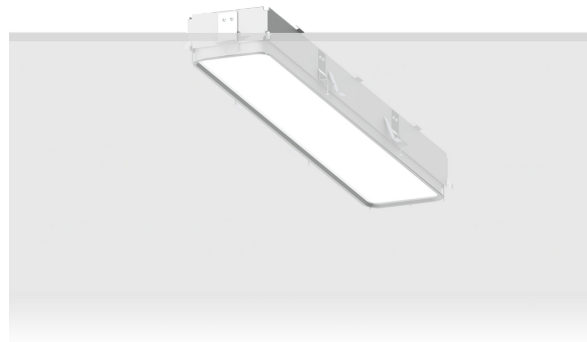


## Luminaire Structure

- Extruded aluminium bended profile with powder coating
- Stainless steel fasteners in grade 316
- Stainless steel brackets and screws for mounting


- PMMA diffuser with Opal (UGR <19) and micro prismatic (UGR <13) options for better glare control
- Up and down light distribution options
- Passive thermal management
- Integral control gear
- Wireless control available through Bluetooth connection

- Daylight and occupancy sensor options
- Emergency module (1 or 3 hours) is available upon request with 3 options (BASIC, SELF-TEST, PRO-DALI)


## Feature

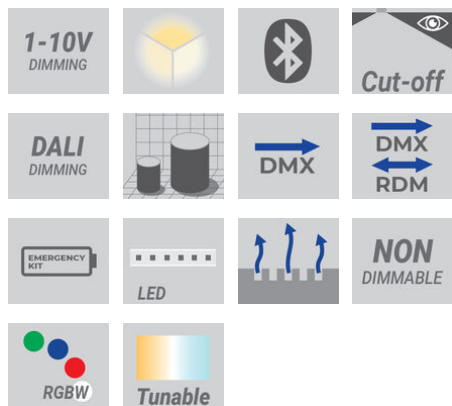


## Optic



## Product colour





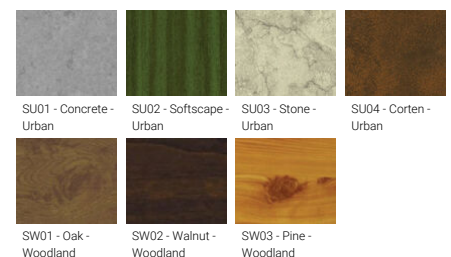







## Special finishes upon request



## PITTSFIELD

## Technical information

	Model number	Light source	Power	Lumen	Optic	CCT / CRI	Dimming type	Weight	
<b>Down - 1070 mm</b>									
PITTSFIELD 1	<b>PIT-80011</b>	432 LED	27 W	2915 - 3336 lm	O [Opal], P [Micro-prismatic]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	5.2 kg	
PITTSFIELD 1	<b>PIT-80012</b>	432 LED	38 W	4102 - 4671 lm	O [Opal], P [Micro-prismatic]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	5.2 kg	
<b>Down - 1070 mm - RGBW</b>									
PITTSFIELD 1	<b>PIT-80014</b>	1728 LED	54 W	1905 lm	O [Opal], P [Micro-prismatic]	RGBW40	Bluetooth	5.2 kg	
<b>Down - 1070 mm - RGBW DMX</b>									
PITTSFIELD 1	<b>PIT-80015</b>	1728 LED	54 W	1905 lm		RGBW40		5.2 kg	
<b>Down - 1070 mm - TW</b>									
PITTSFIELD 1	<b>PIT-80013</b>	864 LED	43 W	5444 lm	O, P	TW (2700K - 6500K)	DALI	5.2 kg	
<b>Down - 1400 mm</b>									
PITTSFIELD 1	<b>PIT-80021</b>	576 LED	35 W	3605 - 4299 lm	O [Opal], P [Micro-prismatic]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	6.5 kg	
PITTSFIELD 1	<b>PIT-80022</b>	576 LED	49 W	5020 - 6044 lm	O [Opal], P [Micro-prismatic]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	6.5 kg	
<b>Down - 1400 mm - RGBW</b>									
PITTSFIELD 1	<b>PIT-80024</b>	2304 LED	72 W	2178 lm	O [Opal], P [Micro-prismatic]	RGBW40	Bluetooth	6.5 kg	
<b>Down - 1400 mm - RGBW DMX</b>									
PITTSFIELD 1	<b>PIT-80025</b>	2304 LED	72 W	2178 lm	O, P	RGBW40	DMX, DMX/RDM	6.5 kg	
<b>Down - 1400 mm - TW</b>									
PITTSFIELD 1	<b>PIT-80023</b>	1152 LED	58 W	6222 lm	O, P	TW (2700K - 6500K)	DALI	6.5 kg	
<b>Down - 730 mm</b>									
PITTSFIELD 1	<b>PIT-80001</b>	288 LED	23 W	2366 - 2685 lm	O [Opal], P [Micro-prismatic]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	3.7 kg	
PITTSFIELD 1	<b>PIT-80002</b>	288 LED	32 W	3306 - 3771 lm	O [Opal], P [Micro-prismatic]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	3.7 kg	
<b>Down - 730 mm - RGBW</b>									

We reserve the right to make technical and design changes.












01:24, 28-04-2024

<https://www.ligman.com/pittsfield-recessed-ceiling-luminaires-pi-rec3/>

## THAILAND

LIGMAN Lighting Co.,Ltd.  
17/2 Moo 4, Monthong, Bang Nam Prio,  
24150 Chachoengsao - Thailand  
[info@ligman.com](mailto:info@ligman.com)

## PITTSFIELD

PITTSFIELD 1	PIT-80004	1152 LED	36 W	1360 lm	O [Opal], P [Micro-prismatic]	RGBW40	Bluetooth	3.7 kg	
<b>Down - 730 mm - RGBW DMX</b>									
PITTSFIELD 1	PIT-80005	1152 LED	36 W	1360 lm		RGBW40		3.7 kg	
<b>Down - 730 mm - TW</b>									
PITTSFIELD 1	PIT-80003	576 LED	36 W	3889 lm	O, P	TW (2700K - 6500K)	DALI	3.7 kg	
<b>Down - Trimless - 1060 mm</b>									
PITTSFIELD 2	PIT-80111	432 LED	27 W	2915 - 3336 lm	O [Opal], P [Micro-prismatic]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	5.1 kg	
PITTSFIELD 2	PIT-80112	432 LED	38 W	4102 - 4671 lm	O [Opal], P [Micro-prismatic]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	5.1 kg	
<b>Down - Trimless - 1060 mm - RGBW</b>									
PITTSFIELD 2	PIT-80114	1728 LED	54 W	1905 lm	O [Opal], P [Micro-prismatic]	RGBW40	Bluetooth	5.1 kg	
PITTSFIELD 2	PIT-80124	2304 LED	72 W	2178 lm	O [Opal], P [Micro-prismatic]	RGBW40	Bluetooth	6.2 kg	
<b>Down - Trimless - 1060 mm - RGBW DMX</b>									
PITTSFIELD 2	PIT-80115	1728 LED	54 W	1905 lm	O, P	RGBW40	DMX, DMX/RDM	5.1 kg	
<b>Down - Trimless - 1060 mm - TW</b>									
PITTSFIELD 2	PIT-80113	864 LED	43 W	5444 lm	O, P	TW (2700K - 6500K)	DALI	5.1 kg	
<b>Down - Trimless - 1390 mm</b>									
PITTSFIELD 2	PIT-80121	576 LED	35 W	3605 - 4299 lm	O [Opal], P [Micro-prismatic]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	6.2 kg	
PITTSFIELD 2	PIT-80122	576 LED	49 W	5020 - 6044 lm	O [Opal], P [Micro-prismatic]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	6.2 kg	
<b>Down - Trimless - 1390 mm - RGBW</b>									
PITTSFIELD 2	PIT-80125	2304 LED	72 W	2178 lm	O, P	RGBW40	DMX, DMX/RDM	6.2 kg	
<b>Down - Trimless - 1390 mm - TW</b>									
PITTSFIELD 2	PIT-80123	1152 LED	58 W	6222 lm	O, P	TW (2700K - 6500K)	DALI	6.2 kg	
<b>Down - Trimless - 720 mm</b>									
PITTSFIELD 2	PIT-80101	288 LED	23 W	2366 - 2685 lm	O [Opal], P [Micro-prismatic]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	3.6 kg	

We reserve the right to make technical and design changes.

01:24, 28-04-2024

<https://www.ligman.com/pittsfield-recessed-ceiling-luminaires-pi-rec3/>








## THAILAND

LIGMAN Lighting Co.,Ltd.  
17/2 Moo 4, Monthong, Bang Nam Prio,  
24150 Chachoengsao - Thailand  
[info@ligman.com](mailto:info@ligman.com)

# PITTSFIELD

PITTSFIELD 2	<b>PIT-80102</b>	288 LED	32 W	3306 - 3771 lm	O [Opal], P [Micro-prismatic]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	3.6 kg	
<b>Down - Trimless - 720 mm - RGBW</b>									
PITTSFIELD 2	<b>PIT-80104</b>	1152 LED	36 W	1360 lm	O [Opal], P [Micro-prismatic]	RGBW40	Bluetooth	3.6 kg	
<b>Down - Trimless - 720 mm - RGBW DMX</b>									
PITTSFIELD 2	<b>PIT-80105</b>	ITLC0309-RGBW40-250mA	36 W	1360 lm	O, P	RGBW40	DMX, DMX/RDM	3.6 kg	
<b>Down - Trimless - 720 mm - TW</b>									
PITTSFIELD 2	<b>PIT-80103</b>	576 LED	29 W	3889 lm	O, P	TW (2700K - 6500K)	DALI	3.6 kg	

## Accessories

	 Wireless bluetooth converter <b>A90291</b>	 Xpress wireless switch <b>A90591</b>	 Decorative pattern - Type A for PITTSFIELD 720 mm <b>A91921</b>	 Decorative pattern - Type A for PITTSFIELD 1060 mm <b>A92021</b>	 Decorative pattern - Type A for PITTSFIELD 1390 mm <b>A92121</b>	 Decorative pattern - Type B for PITTSFIELD 720 mm <b>A93321</b>	 Decorative pattern - Type B for PITTSFIELD 1060 mm <b>A93421</b>
PIT-80001	•	•	•			•	
PIT-80002	•	•	•			•	
PIT-80003	•	•	•			•	
PIT-80004		•	•			•	
PIT-80005			•			•	
PIT-80011	•	•		•			•
PIT-80012	•	•		•			•
PIT-80013		•		•			•
PIT-80014			•			•	
PIT-80015			•			•	
PIT-80021	•	•			•		
PIT-80022	•	•			•		
PIT-80023	•	•			•		
PIT-80024		•	•			•	
PIT-80025			•			•	
PIT-80101	•	•	•			•	
PIT-80102	•	•	•			•	
PIT-80103	•	•	•			•	
PIT-80104			•			•	
PIT-80105			•			•	
PIT-80111	•	•		•			•
PIT-80112	•	•		•			•
PIT-80113	•	•		•			•
PIT-80114		•	•			•	
PIT-80115			•			•	
PIT-80121	•	•			•		
PIT-80122	•	•			•		
PIT-80123	•	•			•		
PIT-80124		•	•			•	
PIT-80125			•			•	

We reserve the right to make technical and design changes.








01:24, 28-04-2024







<https://www.ligman.com/pittsfield-recessed-ceiling-luminaires-pi-rec3/>

**THAILAND**

LIGMAN Lighting Co.,Ltd.  
17/2 Moo 4, Monthong, Bang Nam Prio, 24150 Chachoengsao - Thailand  
[info@ligman.com](mailto:info@ligman.com)

# PITTSFIELD

	 Decorative pattern - Type B for PITTSFIELD 1390 mm <b>A93521</b>	 Decorative pattern - Type C for PITTSFIELD 720 mm <b>A94721</b>	 Decorative pattern - Type C for PITTSFIELD 1060 mm <b>A94821</b>	 Decorative pattern - Type C for PITTSFIELD 1390 mm <b>A94921</b>	 DALI Control System <b>Control-DALI</b>	 DMX Control System <b>Control-DMX</b>	 DMX/RDM Control System <b>Control-DMX-RDM</b>
PIT-80001		•			•		
PIT-80002		•			•		
PIT-80003		•			•		
PIT-80004		•			•		
PIT-80005		•				•	•
PIT-80011			•		•		
PIT-80012			•		•		
PIT-80013			•		•		
PIT-80014		•			•		
PIT-80015		•				•	•
PIT-80021	•			•	•		
PIT-80022	•			•	•		
PIT-80023	•			•	•		
PIT-80024		•			•		
PIT-80025		•				•	•
PIT-80101		•			•		
PIT-80102		•			•		
PIT-80103		•			•		
PIT-80104		•			•		
PIT-80105		•				•	•
PIT-80111			•		•		
PIT-80112			•		•		
PIT-80113			•		•		
PIT-80114		•			•		
PIT-80115		•				•	•
PIT-80121	•			•	•		
PIT-80122	•			•	•		
PIT-80123	•			•	•		
PIT-80124		•			•		
PIT-80125		•				•	•

	 Emergency module - 250V - BASIC <b>EM250V-BA</b>	 Emergency module - 250V - PRO-DALI <b>EM250V-DA</b>	 Emergency module - 250V - SELF-TEST <b>EM250V-ST</b>	 Emergency module - 50V - BASIC <b>EM50V-BA</b>	 Emergency module - 50V - PRO-DALI <b>EM50V-DA</b>	 Emergency module - 50V - SELF-TEST <b>EM50V-ST</b>
PIT-80001				•	•	•
PIT-80002	•	•	•			
PIT-80003						
PIT-80004						
PIT-80005						
PIT-80011	•	•	•			
PIT-80012	•	•	•			
PIT-80013						
PIT-80014						
PIT-80015						
PIT-80021	•	•	•			
PIT-80022	•	•	•			
PIT-80023						
PIT-80024						
PIT-80025						
PIT-80101				•	•	•
PIT-80102	•	•	•			
PIT-80103						

We reserve the right to make technical and design changes.

01:24, 28-04-2024

<https://www.ligman.com/pittsfield-recessed-ceiling-luminaires-pi-rec3/>


**THAILAND**

LIGMAN Lighting Co.,Ltd.  
17/2 Moo 4, Monthong, Bang Nam Prioa,  
24150 Chachoengsao - Thailand  
[info@ligman.com](mailto:info@ligman.com)


# PITTSFIELD

PIT-80104			
PIT-80105			
PIT-80111	•	•	•
PIT-80112	•	•	•
PIT-80113			
PIT-80114			
PIT-80115			
PIT-80121	•	•	•
PIT-80122	•	•	•
PIT-80123			
PIT-80124			
PIT-80125			


PIT-80001, PIT-80002, PIT-80003,  
PIT-80004, PIT-80005

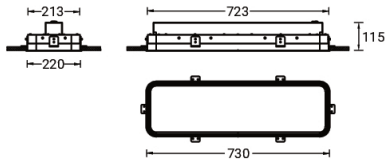


PIT-80101, PIT-80102, PIT-80103,  
PIT-80104, PIT-80105

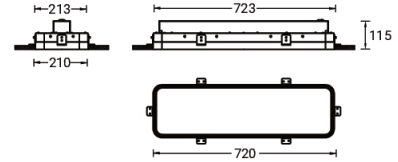


PIT-80011, PIT-80012, PIT-80013,  
PIT-80014, PIT-80015

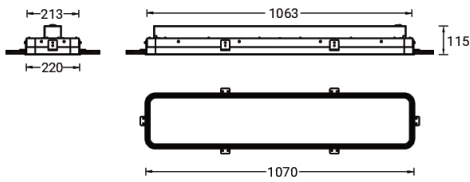


PIT-80111, PIT-80112, PIT-80113,  
PIT-80114, PIT-80115

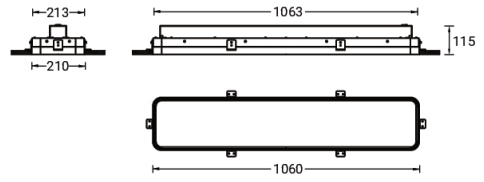

PIT-80021, PIT-80022, PIT-80023,  
PIT-80024, PIT-80025

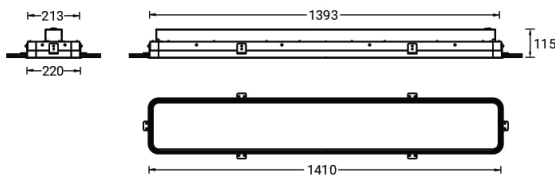

PIT-80121, PIT-80122, PIT-80123,  
PIT-80124, PIT-80125

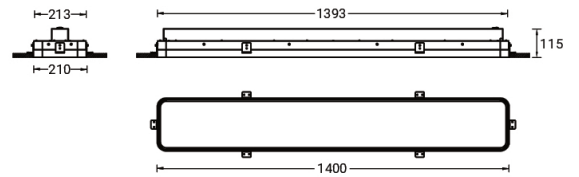

**PITTSFIELD**

---

PITTSFIELD  
**Surface ceiling luminaires**

---

Linear suspended, recessed and surface ambient lighting. Expansive and elegant portfolio of rectilinear workplace lighting fixtures.

<https://www.ligman.com/pittsfield-surface-ceiling-luminaires-pit-cei3/>



---

PITTSFIELD  
**Pendant luminaires**

---

Linear suspended, recessed and surface ambient lighting. Expansive and elegant portfolio of rectilinear workplace lighting fixtures.

<https://www.ligman.com/pittsfield-pendant-luminaires-pi-pen3/>