

**ATLANTIC 8 (AA-30156-2-2)****Product description**

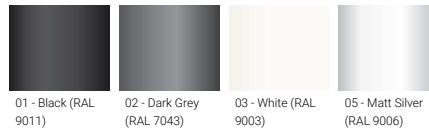
Medium - Straight shade - Cone top

**Luminaire Structure**

- Pre-treated before powder coating ensuring high corrosion resistance
- Die-cast aluminium housing
- Two cable entries for through wiring
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Opal toughened glass diffuser
- Integral control gear

**Optic**

G

**Product colour**

01 - Black (RAL 9011)

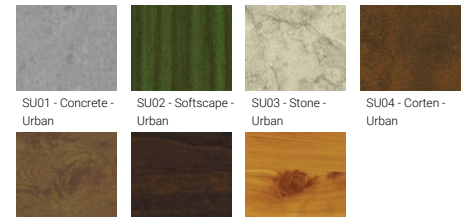
02 - Dark Grey (RAL 7043)

03 - White (RAL 9003)

05 - Matt Silver (RAL 9006)



06 - Bronze (RAL 6014)

**Special finishes upon request**

SU01 - Concrete - Urban

SU02 - Softscape - Urban

SU03 - Stone - Urban

SU04 - Corten - Urban

SW01 - Oak - Woodland

SW02 - Walnut - Woodland

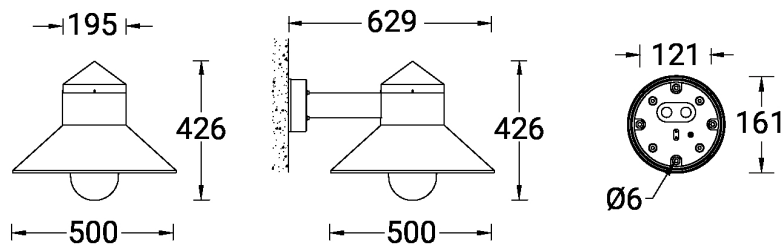
SW03 - Pine - Woodland

**ATLANTIC 8 (AA-30156-2-2)**

**Technical information**

<b>Material</b>	Aluminium	<b>Optic</b>	G	<b>Product colours</b>	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland	
<b>Light source</b>	1 COB	<b>Optic value</b>	144°			
<b>Power</b>	41 W	<b>CCT / CRI</b>	3000K CRI80, 4000K CRI80			
<b>Lumen</b>	3015 - 3174 lm	<b>Bug</b>	B1-U3-G1			
<b>Efficacy</b>	63 - 64 lm/W	<b>ULR</b>	3%			
<b>Driver option</b>	Integral control gear	<b>ULOR</b>	3%			
<b>Driver</b>	Constant current (CC)	<b>CIE flux code n°3</b>	92			
<b>Input voltage</b>	220-240 V 50/60 Hz	<b>Dimming type</b>	On/Off, 1-10V, DALI			
					<b>Weight</b>	8.9 kg
					<b>Operating temperature</b>	-20 °C to 50 °C
				<b>Through wiring</b>	Two cable entries for through wiring	
				<b>Lens / Reflector / Optic</b>	Opal toughened glass diffuser	
				<b>MacAdam Ellipse</b>	3 SDCM	
				<b>Lifetime L90B10 (hours)</b>	> 55,000	
				<b>Variants (1-10V, DALI)</b>	Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)	

**AA-30156-2-2**



**Accessories**



DALI Control System  
Control-DALI