

ARIZONA 6 (AR-21131)



Product description

Ø225 mm - Supplied with specific 3 m cylindrical, straight aluminium pole: APD130225-AR-21131 - 2 projectors - IP65 - IK06




Luminaire Structure

- Die-cast aluminium housing
- Extruded aluminium column
- Pre-treated before powder coating ensuring high corrosion resistance
- Single cable entry
- One IP68 connector supplied with 0.2 m of 3x1.0 sqmm outdoor cable


- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- High-efficiency optical reflector
- Clear acrylic PMMA diffuser
- Integral control gear

- Maximum wind load resistance is 140 km/h
- Surge protection 10kV
- For ARIZONA 8, the luminaire and the lighting pole with illuminated decorative graphic are controlled separately. Upon request, they can be controlled together by the same protocol, either DMX or DALI.


Optic



Product colour

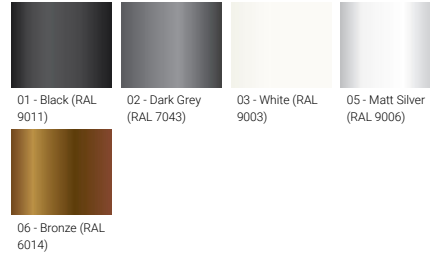

Special finishes upon request

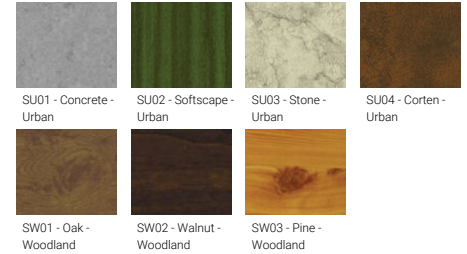


ARIZONA 6 (AR-21131)

Technical information

Material	Aluminium
Light source	3 COB
Power	88 W
Lumen	6476 - 6703 lm
Efficacy	74 - 76 lm/W
Driver option	Integral control gear
Driver	Constant current (CC)
Input voltage	220-240 V 50/60 Hz

Optic	G
Optic value	360°
CCT / CRI	3000K CRI80, 4000K CRI80
Dimming type	On/Off, 1-10V, DALI
Product colours	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland
Weight	48 kg
Operating temperature	-20 °C to 40 °C
Cable	One IP68 connector supplied with 0.2 m of 3x1.0 sqmm outdoor cable

Through wiring	Single cable entry
Lens / Reflector / Optic	High-efficiency optical reflector, Clear acrylic PMMA diffuser
MacAdam Ellipse	3 SDCM
Lifetime L90B10 (hours)	> 50,700
Lifetime L80B10 (hours)	> 63,500
Lifetime L80B50 (hours)	> 63,500
Variants (On/Off, 1-10V, DALI)	Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)

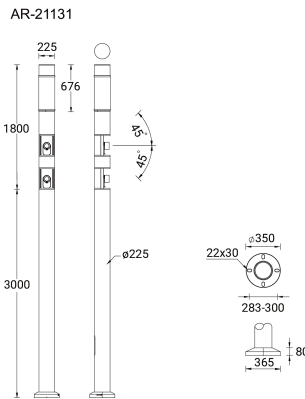

Accessories



3 m - Cylindrical, straight aluminium pole for ARIZONA
APD130225-AR-21131



Circuit breaker box IP44
A21291



Root mount kit
A20791



DALI Control System
Control-DALI