




Product description

Ø225 mm - Supplied with specific 3 m cylindrical, straight aluminium pole: APD130225-ARIZONA - High Output - IK07

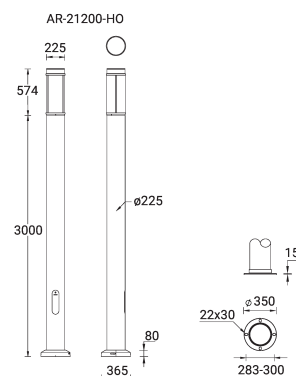

microPrim™

Technical information

Material	Aluminium
Light source	1 COB
Power	34 W
Lumen	3952 - 4333 lm
Efficacy	116 - 127 lm/W
Driver option	Integral control gear
Driver	Constant current (CC)
Input voltage	220-240V 50/60Hz
Optic	G
Optic value	142°x100°
CCT / CRI	2700K CRI80, 3000K CRI80, 4000K CRI80
Bug	B2-U2-G1, B3-U2-G1
ULR	1%
ULOR	1%

CIE flux code n°3	93
Dimming type	On/Off, 1-10V, DALI
Product colours	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland
Weight	34.0 kg
Operating temperature	-20 °C to 50 °C
EPA (m2)	0.508
Cable	One IP68 connector supplied with 0.2 m of 3x1.0 sqmm outdoor cable

Through wiring	Single cable entry
Lens / Reflector / Optic	High-efficiency PMMA lens, Clear acrylic PMMA diffuser
MacAdam Ellipse	3 SDCM
Lifetime L90B10 (hours)	> 84,000
Lifetime L80B10 (hours)	> 105,000
Lifetime L80B50 (hours)	> 115,000
Variants (1-10V)	Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)

Luminaire structure

- Die-cast aluminium housing
- Extruded aluminium column
- Pre-treated before powder coating ensuring high corrosion resistance
- Single cable entry
- One IP68 connector supplied with 0.2 m of 3x1.0 sqmm outdoor cable

- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- High-efficiency PMMA lens
- Clear acrylic PMMA diffuser
- Integral control gear
- Maximum wind load resistance is 140 km/h

- Surge protection 10kV
- For ARIZONA 8, the luminaire and the lighting pole with illuminated decorative graphic are controlled separately. Upon request, they can be controlled together by the same protocol, either DMX or DALI.

Accessory



Circuit breaker box IP44
A21291



Root mount kit
A20691



DALI Control System
Control-DALI

Pole (required)



3 m - Cylindrical, straight
aluminium pole for ARIZONA
APD130225-ARIZONA

Optic



G


Product colour




01 - Black (RAL 9011)



02 - Dark Grey (RAL 7043)



03 - White (RAL 9003)




05 - Matt Silver (RAL 9006)




06 - Bronze (RAL 6014)


Special finishes upon request




SU01 - Concrete - Urban



SU02 - Softscape - Urban



SU03 - Stone - Urban




SU04 - Corten - Urban



SW01 - Oak - Woodland



SW02 - Walnut - Woodland



SW03 - Pine - Woodland

