


BRIGHTON 2 (BRI-90002)**Luminaire Structure**

- Extruded aluminium housing with powder coating
- Stainless steel fasteners in grade 316
- Stainless steel suspension kit in grade 304
- Suspension height adjustable up to 2 m
- Integral control gear

Optic**M****W****EW****Product colour**08 - Glossy White
(RAL 9010)09 - Glossy Black
(HB451022M)

BRIGHTON 2 (BRI-90002)


Technical information

Material	Aluminium
Light source	4 LED
Power	14 W
Lumen	1192 - 1358 lm
Efficacy	85 - 97 lm/W
Driver option	Integral control gear
Driver	Constant current (CC)
Input voltage	220-240 V 50/60 Hz
Optic	M, W, EW

Optic value	26°, 52°, 69°
CCT / CRI	3000K CRI80, 4000K CRI80
Bug	B1-U0-G0
ULR	0%
ULOR	0%
CIE flux code n°3	100
Dimming type	On/Off, 1-10V, DALI
Product colours	Glossy White, Glossy Black
Weight	0.84 kg

Operating temperature	-20 °C to 40 °C
Lens / Reflector / Optic	High-efficiency PMMA lens
MacAdam Ellipse	3 SDCM
Lifetime L90B10 (hours)	> 90,000
Lifetime L80B10 (hours)	> 90,000
Lifetime L80B50 (hours)	> 90,000
Variants (On/Off, DALI)	Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)

BRI-90002

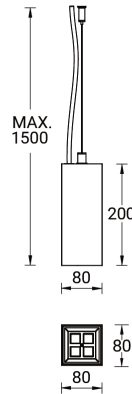

Accessories



DALI Control System
Control-DALI