

GANDALF 26 (GA-51113)




Luminaire Structure

- Die-cast aluminium housing
- Pre-treated before powder coating ensuring high corrosion resistance
- Single cable entry, through wiring upon request
- One IP68 connector supplied with 0.2 m of 3x1.0 sqmm outdoor cable


- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- High-efficiency PMMA lens
- Clear toughened glass

- Integral control gear
- Hot-dipped galvanised steel mounting bracket allows for ceiling, wall or surface mounting


Optic

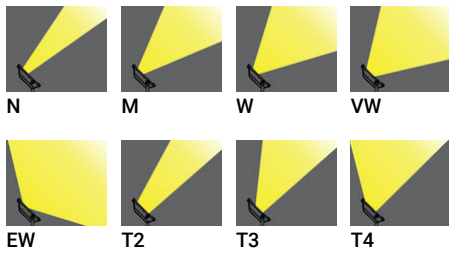

Product colour

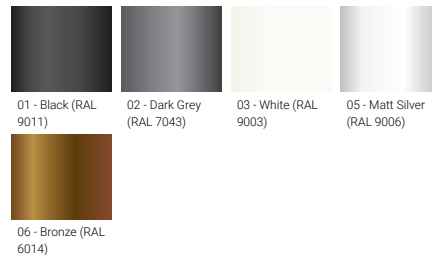

Special finishes upon request

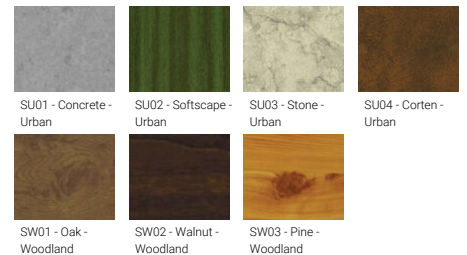


GANDALF 26 (GA-51113)

Technical information

Material	Aluminium	Optic value	11°, 26°, 52°, 66°, 101°x114°, 140°x47°, 138°x64°, 99°x77°	Operating temperature	-20 °C to 50 °C
Light source	2 x 24 LED	CCT / CRI	3000K CRI80, 4000K CRI80	Cable	One IP68 connector supplied with 0.2 m of 3x1.0 sqmm outdoor cable
Power	92 W	Bug	B1-U0-G1, B3-U0-G0, B4-U0-G0, B5-U0-G0	Through wiring	Single cable entry, through wiring upon request
Lumen	7838 - 10372 lm	ULR	0%	Lens / Reflector / Optic	High-efficiency PMMA lens, Clear toughened glass
Efficacy	85 - 113 lm/W	ULOR	0%	MacAdam Ellipse	3 SDCM
Driver option	Integral control gear	CIE flux code n°3	100, 97, 99	Lifetime L90B10 (hours)	> 120,000
Driver	Constant current (CC)	Dimming type	On/Off, 1-10V, DALI	Lifetime L80B10 (hours)	> 120,000
Input voltage	220-240 V 50/60 Hz		Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland	Lifetime L80B50 (hours)	> 120,000
Optic	N, M, W, VW, EW, T2, T3, T4	Product colours		Variants (On/Off, 1-10V, DALI)	Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)
		Weight	8 kg		

GA-51113

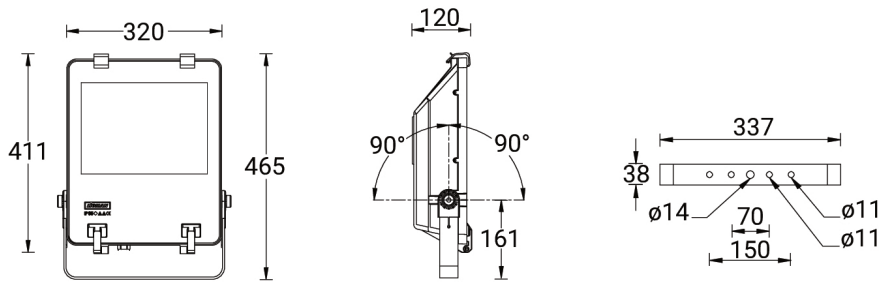

Accessories



Spigot cover for double lantern
A50260-SC60



Spigot cover for double lantern
A50276-SC76



Spigot cover for single lantern
A50160-SC60



Spigot cover for single lantern
A50176-SC76

GANDALF 26 (GA-51113)



DALI Control System
Control-DALI