

**LIGHTALK 15 (LA-30036) (Version 1)**



**Product description**

Without remote driver - Constant voltage (CV) 24 V - 1205 mm - Class III - RGBW




**Luminaire Structure**

- Die-cast aluminium end-caps
- Extruded aluminium housing and sheet aluminium front frame
- Pre-treated before powder coating ensuring high corrosion resistance
- Two cable entries for through wiring


- Four IP67 connectors supplied with 2x0.2 m of 3x1.0 sqmm outdoor cable and 2x0.2 m of 2x0.5 sqmm outdoor shielded cable
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Clear toughened glass

- Remote driver (not included)
- Remote box IP-rated is not included and is to be ordered separately for constant current (CC) products
- 24 VDC input, DMX/RDM address with stable signal


**Optic**



**Product colour**

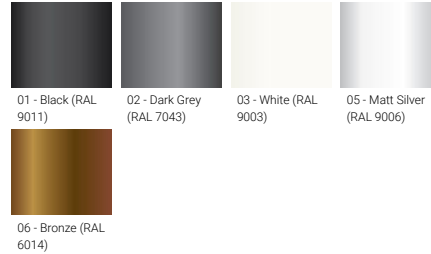

**Special finishes upon request**

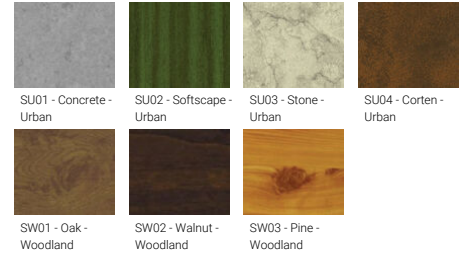


**LIGHTALK 15 (LA-30036) (Version 1)**

**Technical information**

<b>Material</b>	Aluminium	<b>Driver</b>	Constant voltage (CV)	<b>Product colours</b>	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland
<b>Light source</b>	36 LED	<b>Input voltage</b>	24 VDC		<b>Weight</b>
<b>Power</b>	70 W	<b>Optic</b>	N, M, W, E	<b>Operating temperature</b>	-20 °C to 40 °C
<b>Lumen</b>	1810 - 3896 lm	<b>Optic value</b>	16°, 32°, 55°, 20°x30°	<b>Cable</b>	Four IP67 connectors supplied with 2x0.2 m of 3x1.0 sqmm outdoor cable and 2x0.2 m of 2x0.5 sqmm outdoor shielded cable
<b>Efficacy</b>	26 - 56 lm/W	<b>CCT / CRI</b>	RGB+Amber, RGBW30, RGBW40		<b>Through wiring</b>
<b>Driver option</b>	Remote driver (not included)	<b>Dimming type</b>	DMX, DMX/RDM	<b>Lens / Reflector / Optic</b>	Clear toughened glass

**LA-30036**

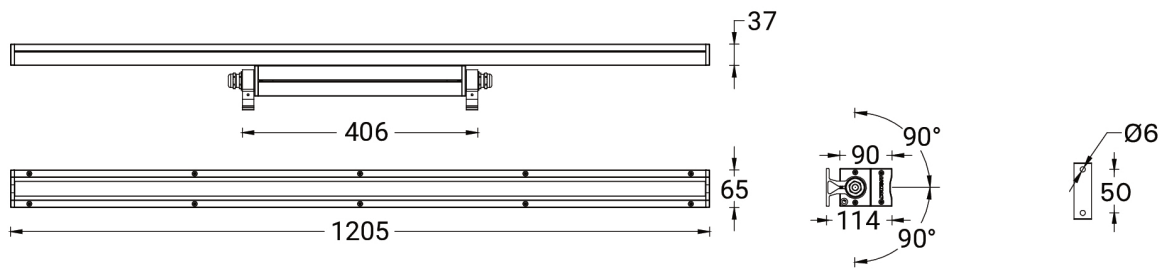

**Accessories**

**DMX CONTROL**

DMX Control System  
**Control-DMX**

**DMX RDM CONTROL**

DMX/RDM Control System  
**Control-DMX-RDM**



Driver (CV) - On/Off - 60 W - IP67 - 24 V  
**A34591-ND**



Driver (CV) - On/Off - 100 W - IP67 - 24 V  
**A34791-ND**

**LIGHTALK 15 (LA-30036) (Version 1)**

---

75 mm extend arm mounting  
**A30891**

---



---

150 mm extend arm mounting  
**A30991**

---



---

300 mm extend arm mounting  
**A31091**

---



---

450 mm extend arm mounting  
**A31191**

---



---

Driver (CV) - On/Off - 150 W -  
IP67 - 24 V  
**A34891-ND**

---



---

Driver (CV) - On/Off - 200 W -  
IP67 - 24 V  
**A34991-ND**

---



---

Driver (CV) - On/Off - 350 W -  
IP67 - 24 V  
**A35091-ND**

---