

LIGHTTALK 16 (LA-40021) (Version 1)



Product description


Without remote driver / recessing box - Constant voltage (CV) 24 V - 455 mm - Class III




Luminaire Structure

- Die-cast aluminium end-caps
- Extruded aluminium housing and sheet aluminium front frame
- Pre-treated before powder coating ensuring high corrosion resistance
- Stainless steel frame on request
- Two cable entries for through wiring
- Two IP67 connectors supplied with 2x0.2 m of 2x1.0 sqmm outdoor cable
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Clear toughened glass
- Remote driver (not included)
- Recessing box is not included
- 24 VDC input, DMX/RDM address with stable signal


Optic

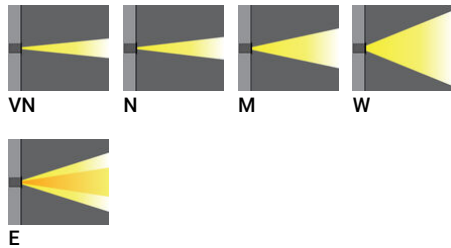

Product colour

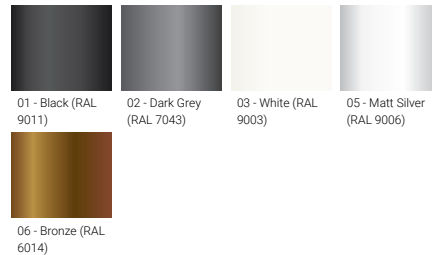

Special finishes upon request

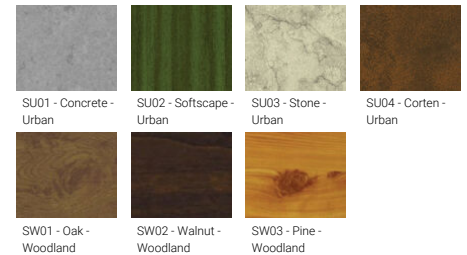


LIGHTALK 16 (LA-40021) (Version 1)


Technical information


Material	Aluminium	Optic	VN, N, M, W, E	Product colours	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland
Light source	12 LED	Optic value	13°, 15°, 26°, 43°, 20° x 35°	Weight	2.1 kg
Power	16 W	CCT / CRI	3000K CRI80, 4000K CRI80	Operating temperature	-20 °C to 40 °C
Lumen	1401 - 1823 lm	Bug	B2-U1-G0, B3-U1-G0	Cable	Two IP67 connectors supplied with 2x0.2 m of 2x1.0 sqmm outdoor cable
Efficacy	88 - 114 lm/W	ULR	0%	Through wiring	Two cable entries for through wiring
Driver option	Remote driver (not included)	ULOR	0%	Lens / Reflector / Optic	Clear toughened glass
Driver	Constant voltage (CV)	CIE flux code n°3	100		
Input voltage	24 VDC	Dimming type	On/Off		

LA-40021

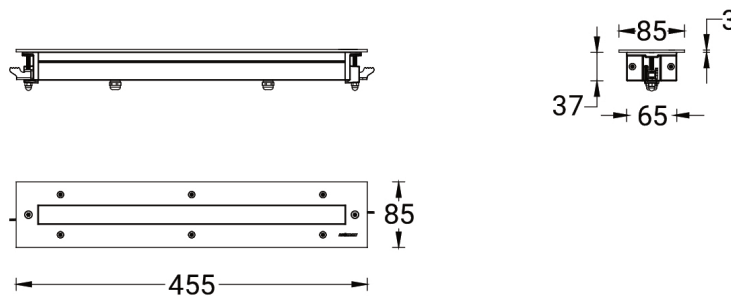

Accessories

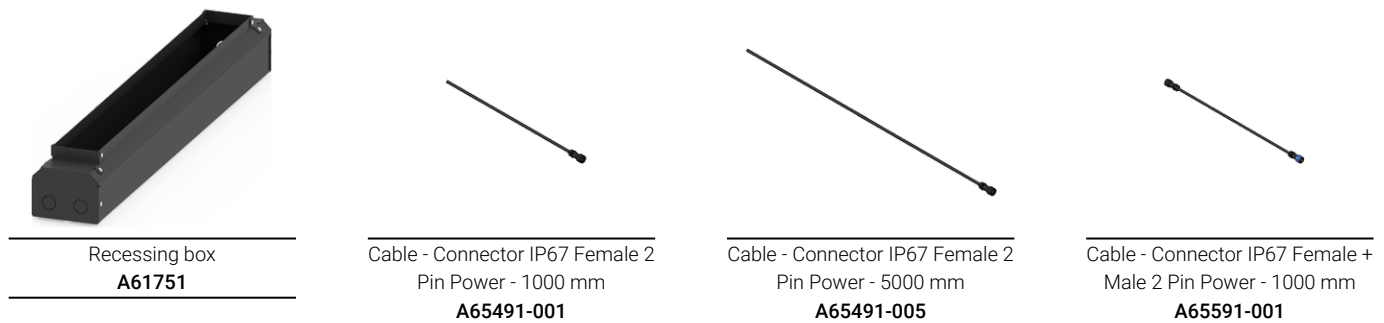

LIGHTALK 16 (LA-40021) (Version 1)

Cable - Connector IP67 Female +
Male 2 Pin Power - 5000 mm
A65591-005



Connector IP67 Female 2 Pin
Power
A68191



Connector IP67 Male 2 Pin
Power
A68291



Driver (CV) - On/Off - 36 W - IP67
- 24 V
A34491-ND



Driver (CV) - On/Off - 60 W - IP67
- 24 V
A34591-ND



Driver (CV) - On/Off - 100 W -
IP67 - 24 V
A34791-ND



Driver (CV) - On/Off - 150 W -
IP67 - 24 V
A34891-ND



Driver (CV) - On/Off - 200 W -
IP67 - 24 V
A34991-ND



Driver (CV) - On/Off - 350 W -
IP67 - 24 V
A35091-ND