

LIGHTTALK 17 (LA-40032) (Version 1)



Product description

Without remote driver / recessing box - Constant voltage (CV) 24 V - 655 mm - Class III - RGBW




microPrim™


Luminaire structure

- Die-cast aluminium end-caps
- Extruded aluminium housing and sheet aluminium front frame
- Pre-treated before powder coating ensuring high corrosion resistance
- Stainless steel frame on request
- Two cable entries for through wiring
- Four IP67 connectors supplied with 2x0.2 m of 3x1.0 sqmm outdoor cable and 2x0.2 m of 2x0.5 sqmm outdoor shielded cable
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Clear toughened glass
- Remote driver (not included)
- Recessing box is not included
- 24 VDC input, DMX/RDM address with stable signal


Optic

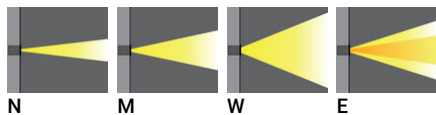

Product colour

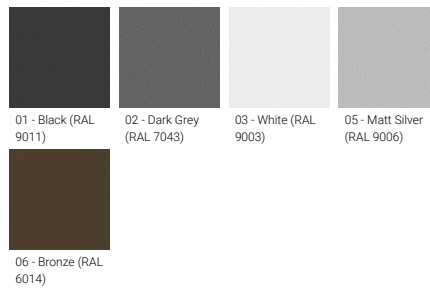

Special finishes upon request

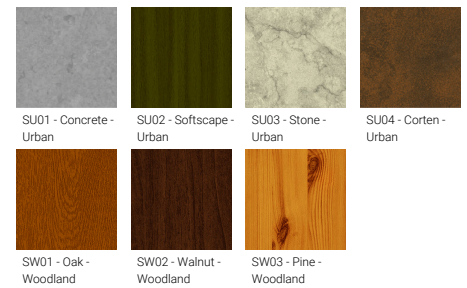


LIGHTALK 17 (LA-40032) (Version 1)

Technical information

| | | | | | |
|----------------------|------------------------------|----------------------|---------------------------|---------------------------------|--|
| Material | Aluminium | Driver | Constant voltage (CV) | Product colours | Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland |
| Light source | 18 LED | Input voltage | 24 VDC | Weight | 4.0 kg |
| Power | 35 W | Optic | N, M, W, E | Operating temperature | -20 °C to 40 °C |
| Lumen | 905 - 1948 lm | Optic value | 16°, 32°, 55°, 20°x30° | Cable | Four IP67 connectors supplied with 2x0.2 m of 3x1.0 sqmm outdoor cable and 2x0.2 m of 2x0.5 sqmm outdoor shielded cable |
| Efficacy | 26 - 56 lm/W | CCT / CRI | RGB+Amber, RGBW30, RGBW40 | Through wiring | Two cable entries for through wiring |
| Driver option | Remote driver (not included) | Dimming type | DMX, DMX/RDM | Lens / Reflector / Optic | Clear toughened glass |

LA-40032

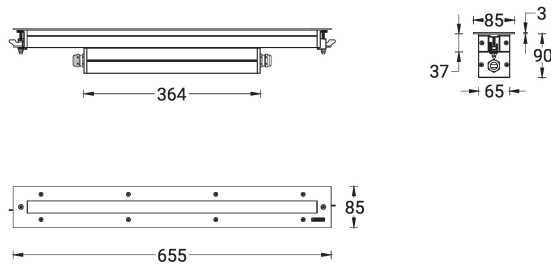

LIGHTALK 17 (LA-40032) (Version 1)

Accessory



DMX Control System
Control-DMX



DMX/RDM Control System
Control-DMX-RDM



Driver (CV) - On/Off - 60 W - IP67
- 24 V
A34591-ND



Driver (CV) - On/Off - 100 W - IP67 - 24 V
A34791-ND



Driver (CV) - On/Off - 150 W - IP67 - 24 V
A34891-ND



Recessing box
A41151