


LIGHTTALK 17 (LA-40033) (Version 1)



Product description


Without remote driver / recessing box - Constant voltage (CV) 24 V - 1250 mm - Class III - RGBW




Luminaire Structure

- Die-cast aluminium end-caps
- Extruded aluminium housing and sheet aluminium front frame
- Pre-treated before powder coating ensuring high corrosion resistance
- Stainless steel frame on request
- Two cable entries for through wiring
- Four IP67 connectors supplied with 2x0.2 m of 3x1.0 sqmm outdoor cable and 2x0.2 m of 2x0.5 sqmm outdoor shielded cable
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Clear toughened glass
- Remote driver (not included)
- Recessing box is not included
- 24 VDC input, DMX/RDM address with stable signal


Optic



Product colour

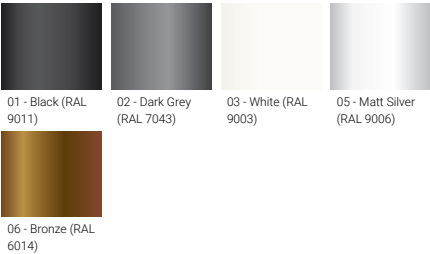

Special finishes upon request

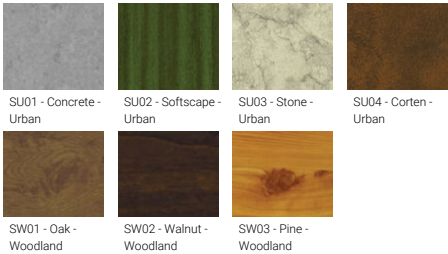


LIGHTALK 17 (LA-40033) (Version 1)

Technical information

Material	Aluminium	Driver	Constant voltage (CV)	Product colours	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland
Light source	36 LED	Input voltage	24 VDC	Weight	6.6 kg
Power	70 W	Optic	N, M, W, E	Operating temperature	-20 °C to 40 °C
Lumen	1810 - 4025 lm	Optic value	16°, 32°, 55°, 20°x30°	Cable	Four IP67 connectors supplied with 2x0.2 m of 3x1.0 sqmm outdoor cable and 2x0.2 m of 2x0.5 sqmm outdoor shielded cable
Efficacy	26 - 58 lm/W	CCT / CRI	RGB+Amber, RGBW30, RGBW40	Through wiring	Two cable entries for through wiring
Driver option	Remote driver (not included)	Dimming type	DMX, DMX/RDM	Lens / Reflector / Optic	Clear toughened glass

LA-40033

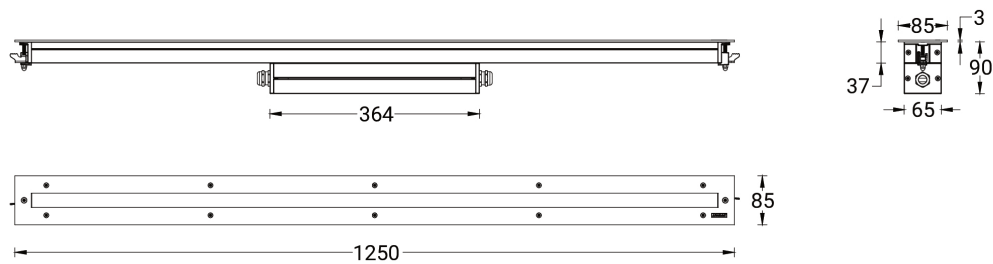

Accessories

DMX CONTROL

DMX Control System
Control-DMX

DMX RDM CONTROL

DMX/RDM Control System
Control-DMX-RDM

Driver (CV) - On/Off - 60 W - IP67
- 24 V
A34591-ND

Driver (CV) - On/Off - 100 W - IP67 - 24 V
A34791-ND

LIGHTALK 17 (LA-40033) (Version 1)



Driver (CV) - On/Off - 150 W -
IP67 - 24 V
A34891-ND



Recessing box
A61051