

NIKON 4 (NI-80531-S)



IK08

Product description


With remote box IP-rated / remote driver - Square -
Stainless steel frame



Luminaire Structure

- Die-cast aluminium housing
- Pre-treated before powder coating ensuring high corrosion resistance
- 6 mm thick front ring in stainless steel or aluminium
- Single cable entry
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Clear toughened glass
- Remote driver (included)

Optic



Product colour




NIKON 4 (NI-80531-S)


Technical information

Material	Stainless Steel	Optic value	15°, 27°, 44°	Operating temperature	-20 °C to 50 °C
Light source	18 LED	CCT / CRI	3000K CRI80, 4000K CRI80	Through wiring	Single cable entry
Power	29 W	Bug	B2-U0-G0, B3-U0-G0	Lens / Reflector / Optic	Clear toughened glass
Lumen	2689 - 3144 lm	ULR	0%	MacAdam Ellipse	3 SDCM
Efficacy	93 - 108 lm/W	ULOR	0%	Lifetime L90B10 (hours)	> 120,000
Driver option	Remote driver (included)	CIE flux code n°3	100	Lifetime L80B10 (hours)	> 120,000
Driver	Constant current (CC)	Dimming type	On/Off, 1-10V, DALI	Lifetime L80B50 (hours)	> 120,000
Input voltage	1000 mA, 27 VDC	Product colours	Stainless Steel	Variants (1-10V)	Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)
Optic	N, M, W	Weight	2.8 kg		

NI-80531-S

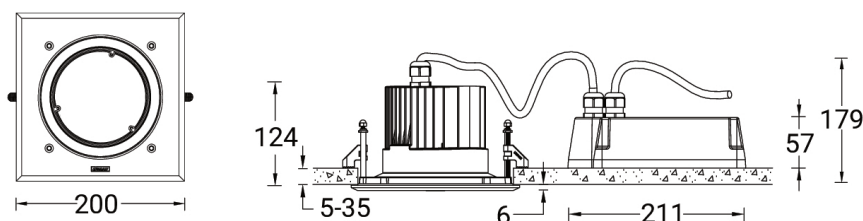

Accessories



Concrete box modification upon request
CONCRETE-BOX



DALI Control System
Control-DALI