

ODESSA 2 (OD-21025) (Version 2)



Product description

Medium - Supplied with specific 8 m cylindrical, straight aluminium pole: APD180140-OD




Luminaire Structure

- Die-cast aluminium housing
- Pre-treated before powder coating ensuring high corrosion resistance
- Single cable entry
- One cable gland supplied with 2 m of 3x1.0 sqmm outdoor cable


- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- High-efficiency optical reflector
- Clear toughened glass

- Integral control gear
- Maximum wind load resistance is 160 km/h


Optic



Product colour

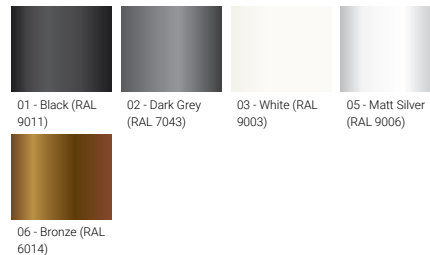

Special finishes upon request

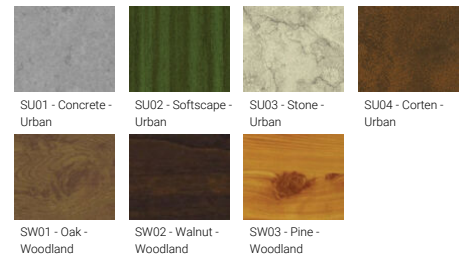


ODESSA 2 (OD-21025) (Version 2)

Technical information

Material	Aluminium
Light source	4 x 1 COB
Power	140 W
Lumen	11848 - 14180 lm
Efficacy	85 - 101 lm/W
Driver option	Integral control gear
Driver	Constant current (CC)
Input voltage	220-240 V 50/60 Hz
Optic	N, M, W, VW

Optic value	15°, 24°, 47°, 66°
CCT / CRI	3000K CRI80, 4000K CRI80
Bug	B2-U0-G0, B3-U0-G0
ULR	0%
ULOR	0%
CIE flux code n°3	100, 99
Dimming type	On/Off, DALI
Product colours	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland
Weight	35.0 kg

Operating temperature	-20 °C to 40 °C
Cable	One cable gland supplied with 2 m of 3x1.0 sqmm outdoor cable
Through wiring	Single cable entry
Lens / Reflector / Optic	High-efficiency optical reflector, Clear toughened glass
MacAdam Ellipse Lifetime L90B10 (hours)	3 SDCM > 55,000
Variants (DALI)	Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)

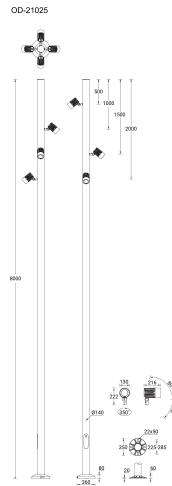


Accessories



Anti-glare visor
A80131



Anti-glare louvre
A80231



Linear spread lens
A80114



Root mount kit
A20691

ODESSA 2 (OD-21025) (Version 2)

DALI Control System
Control-DALI



8 m - Cylindrical, straight
aluminium pole for ODESSA
APD180140-OD

Please contact the factory for technical details if you wish to use Anti-glare accessories, Colour filters, Lenses and slip glasses in combination.