

**PALETTA 4 (PA-31951-1MS)**



**Product description**

345x190 mm - With integrated motion sensor



**Luminaire Structure**


- Die-cast aluminium housing and frame
- Pre-treated before powder coating ensuring high corrosion resistance
- Two cable entries for through wiring
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Opal UV-stabilised polycarbonate diffuser
- Integral control gear
- Optional surface mounting box for easy wiring or conduit connection when wiring from behind is not possible

**Optic**




G

**Product colour**

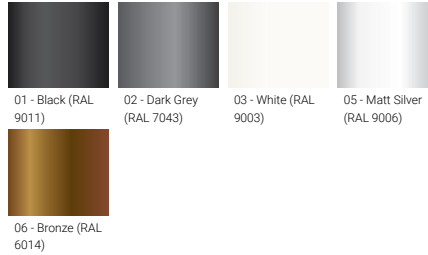

**Special finishes upon request**

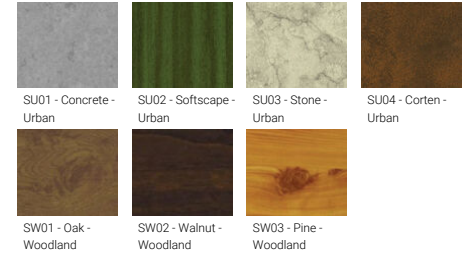

**PALETTA 4 (PA-31951-1MS)**



**Technical information**

<b>Material</b>	Aluminium
<b>Light source</b>	96 LED
<b>Power</b>	15 W
<b>Lumen</b>	1433 - 1508 lm
<b>Efficacy</b>	96 - 101 lm/W
<b>Driver option</b>	Integral control gear
<b>Driver</b>	Constant current (CC)
<b>Input voltage</b>	220-240 V 50/60 Hz

<b>Optic</b>	G
<b>Optic value</b>	134°x123°
<b>CCT / CRI</b>	3000K CRI80, 4000K CRI80
<b>Bug</b>	B0-U2-G1
<b>ULR</b>	11%
<b>ULOR</b>	11%
<b>CIE flux code n°3</b>	88
<b>Dimming type</b>	On/Off, 1-10V

<b>Product colours</b>	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland
<b>Weight</b>	3.1 kg
<b>Through wiring</b>	Two cable entries for through wiring
<b>Lens / Reflector / Optic</b>	Opal UV-stabilised polycarbonate diffuser
<b>MacAdam Ellipse</b>	3 SDCM
<b>Lifetime L90B10 (hours)</b>	> 15,000
<b>Lifetime L80B10 (hours)</b>	> 30,000
<b>Lifetime L80B50 (hours)</b>	> 34,000

PA-31951-1MS



**PALETTA**

- Motion sensor - Microwave - 1-10 V**  
Adjustable sensor (10 seconds - 15 minutes)  
100° Sensitivity  
Sensor detection area 1.7 - 4.0m
- Motion sensor - Microwave - On/Off**  
Adjustable sensor (5 seconds - 30 minutes)  
100° Sensitivity  
Sensor detection area 1.0 - 8.0m

**Accessories**



Surface mounting box for easy cabling (PALETTA 4)  
**SCE-PALETTA-4**



DALI Control System  
**Control-DALI**



Remote controller for the motion sensor - 1-10V (A34191)  
**A34391**