

PRAGUE 2 (PRA-10011-1MS)



Product description

200x80 mm - 500 mm - With integrated motion sensor
- 1 side




Luminaire Structure

- Die-cast aluminium housing and frame
- Extruded aluminium column
- Pre-treated before powder coating ensuring high corrosion resistance
- Single cable entry


- One IP68 connector supplied with 0.2 m of 3x1.0 sqmm outdoor cable
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Clear toughened glass

- High-efficiency PMMA lens
- Integral control gear


Optic

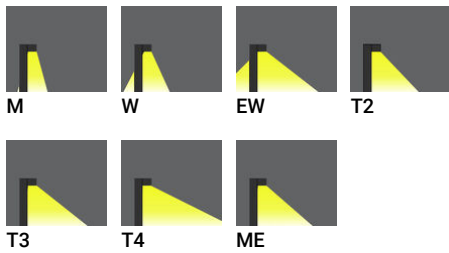

Product colour

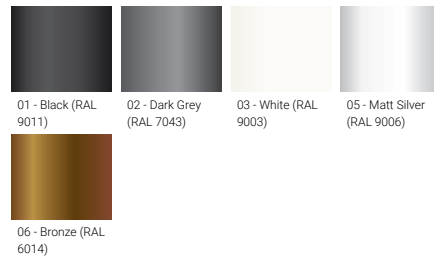

Special finishes upon request

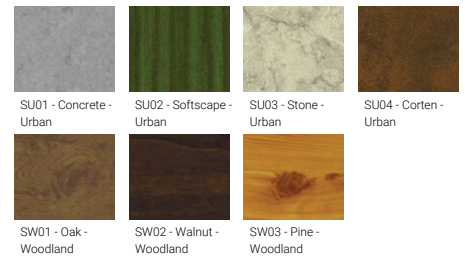

PRAGUE 2 (PRA-10011-1MS)


Technical information

Material	Aluminium
Light source	8 LED
Power	13.9 W
Lumen	1376 - 1675 lm
Efficacy	99 - 121 lm/W
Driver option	Integral control gear
Driver	Constant current (CC)
Input voltage	220-240 V 50/60 Hz
Optic	M, W, EW, T2, T3, T4, ME

Optic value	30°, 56°, 110°x103°, 139°x55°, 123°x85°, 105°x69°, 139°x60°
CCT / CRI	3000K CRI80, 4000K CRI80
Bug	B0-U0-G0, B1-U0-G0, B2-U0-G0
ULR	0%
ULOR	0%
CIE flux code n°3	100, 97, 98, 99
Dimming type	1-10V
Product colours	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland
Weight	5.7 kg

Operating temperature	-20 °C to 40 °C
Cable	One IP68 connector supplied with 0.2 m of 3x1.0 sqmm outdoor cable
Through wiring	Single cable entry
Lens / Reflector / Optic	Clear toughened glass, High-efficiency PMMA lens
MacAdam Ellipse	3 SDCM
Lifetime L90B10 (hours)	> 90,000
Lifetime L80B10 (hours)	> 90,000
Lifetime L80B50 (hours)	> 90,000

PRAGUE
Adjustable sensor (5 seconds – 30 minutes)
30° ~ 150° Sensitivity
Sensor detection area: 9 m

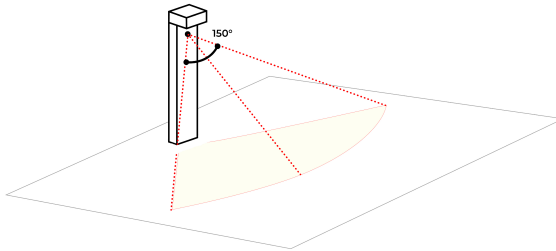

Accessories



Remote controller for the motion sensor - 1-10V (A14591)
A14291



Anchor bolt
A11191