

VEKTER 1 (VK-30002)



Product description

Medium



Luminaire Structure

- Die-cast aluminium housing and frame
- Pre-treated before powder coating ensuring high corrosion resistance
- Two cable entries for through wiring
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)

- Durable silicone rubber gasket
- Clear toughened glass
- High-efficiency PMMA lens
- Integral control gear

- Optional surface mounting box for easy wiring or conduit connection when wiring from behind is not possible

Optic



M W EW T2



T3 T4

Product colour




01 - Black (RAL 9011) 02 - Dark Grey (RAL 7043) 03 - White (RAL 9003) 05 - Matt Silver (RAL 9006)



06 - Bronze (RAL 6014)

Special finishes upon request



SU01 - Concrete - Urban SU02 - Softscape - Urban SU03 - Stone - Urban SU04 - Corten - Urban




SW01 - Oak - Woodland SW02 - Walnut - Woodland SW03 - Pine - Woodland

VEKTER 1 (VK-30002)

Technical information

Material	Aluminium	Optic value	31°, 53°, 110°, 144°x50°, 139°x68°, 97°x77°	Operating temperature	-20 °C to 40 °C
Light source	12 LED	CCT / CRI	3000K, 4000K	Through wiring	Two cable entries for through wiring
Power	28 W	Bug	B1-U0-G0, B1-U0-G1, B2-U0-G0, B3-U0-G0	Lens / Reflector / Optic	Clear toughened glass, High-efficiency PMMA lens
Lumen	2873 - 3330 lm	ULR	0%	MacAdam Ellipse	3 SDCM
Efficacy	103 - 119 lm/W	ULOR	0%	Lifetime L90B10 (hours)	> 90,000
Driver option	Integral control gear	CIE flux code n°3	97, 99	Lifetime L80B10 (hours)	> 90,000
Driver	Constant current (CC)	Dimming type	On/Off, DALI	Lifetime L80B50 (hours)	> 90,000
Input voltage	220-240 V 50/60 Hz	Product colours	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland	Variants (On/Off, DALI)	Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)
Optic	M, W, EW, T2, T3, T4		Weight	3.2 kg	

VK-30002

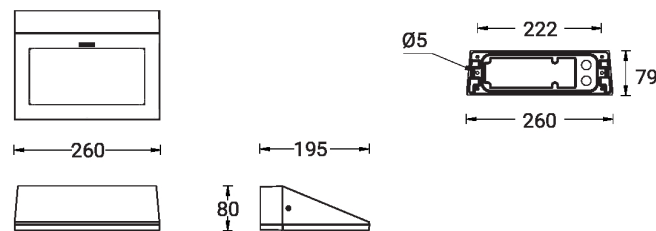

Accessories



Surface mounting box for easy cabling (VEKTER 1)
SCE-VEKTER-1